
Ironic Inspector Documentation

Release 10.8.2.dev2

OpenStack Foundation

Jan 27, 2023

CONTENTS

1	Introduction	1
2	Release Notes	3
3	Using Ironic Inspector	5
3.1	Install Guide	5
3.2	Command References	14
3.3	Configuration Guide	15
3.4	User Guide	78
3.5	Administrator Guide	91
4	Contributor Docs	95
4.1	How To Contribute	95
5	Indices and tables	153
Python Module Index		155
Index		157

**CHAPTER
ONE**

INTRODUCTION

This is an auxiliary service for discovering hardware properties for a node managed by [Ironic](#). Hardware introspection or hardware properties discovery is a process of getting hardware parameters required for scheduling from a bare metal node, given its power management credentials (e.g. IPMI address, user name and password).

- Free software: Apache license
- Source: <https://opendev.org/openstack/ironic-inspector/>
- Bugs: <https://storyboard.openstack.org/#!/project/944>
- Downloads: <https://tarballs.openstack.org/ironic-inspector/>
- Documentation: <https://docs.openstack.org/ironic-inspector/latest/>
- Python client library and CLI tool: [python-ironic-inspector-client](#) ([documentation](#)).

Note: **ironic-inspector** was called *ironic-discoverd* before version 2.0.0.

**CHAPTER
TWO**

RELEASE NOTES

For information on any current or prior version, see [the release notes](#).

USING IRONIC INSPECTOR

3.1 Install Guide

Install from PyPI (you may want to use virtualenv to isolate your environment):

```
pip install ironic-inspector
```

Also there is a DevStack plugin for **ironic-inspector** - see [How To Contribute](#) for the current status.

Finally, some distributions (e.g. Fedora) provide **ironic-inspector** packaged, some of them - under its old name *ironic-discoverd*.

There are several projects you can use to set up **ironic-inspector** in production. [puppet-ironic](#) provides Puppet manifests, while [bifrost](#) provides an Ansible-based standalone installer. Refer to [Configuration](#) if you plan on installing **ironic-inspector** manually.

Note: Please beware of [possible DNS issues](#) when installing **ironic-inspector** on Ubuntu.

3.1.1 Sample Configuration Files

To generate a sample configuration file, run the following command from the top level of the code tree:

```
tox -egenconfig
```

For a pre-generated sample configuration file, see [Ironic Inspector Configuration Options](#).

To generate a sample policy file, run the following command from the top level of the code tree:

```
tox -egenpolicy
```

For a pre-generated sample configuration file, see [Ironic Inspector Policy](#).

3.1.2 Installation options

Starting with Train release, ironic-inspector can run in a non-standalone mode, which means ironic-inspector API and ironic-inspector conductor are separated services, they can be installed on the same host or different hosts.

Following are some considerations when you run ironic-inspector in non-standalone mode:

- Additional packages may be required depending on the tooz backend used in the installation. For example, `etcd3gw` is required if the backend driver is configured to use `etcd3+http://`, `pymemcache` is required to use `memcached://`. Some distributions may provide packages like `python3-etcd3gw` or `python3-memcache`. Supported drivers are listed at [Tooz drivers](#).
- For ironic-inspector running in non-standalone mode, PXE configuration is only required on the node where ironic-inspector conductor service is deployed.
- Switch to a database backend other than sqlite.

3.1.3 Configuration

Copy the sample configuration files to some permanent place (e.g. `/etc/ironic-inspector/inspector.conf`). Fill in these minimum configuration values:

- The `standalone` in the `DEFAULT` section - This determines whether ironic-inspector services are intended to be deployed separately.
- The `keystone_auth_token` section - credentials to use when checking user authentication.
- The `ironic` section - credentials to use when accessing `ironic` API. When `ironic` is deployed standalone with no authentication, specify the following:

```
[ironic]
auth_type=none
```

When `ironic` is deployed standalone with HTTP Basic authentication, valid credentials are also required:

```
[ironic]
auth_type=http_basic
username=myName
password=myPassword
```

- `connection` in the `database` section - SQLAlchemy connection string for the database. By default ironic-inspector uses sqlite as the database backend, if you are running ironic-inspector in a non-standalone mode, please change to other database backends.
- `dnsmasq_interface` in the `iptables` section - interface on which dnsmasq (or another DHCP service) listens for PXE boot requests (defaults to `br-ctlplane` which is a sane default for `tripleo`-based installations but is unlikely to work for other cases).
- if you wish to use the dnsmasq PXE/DHCP filter driver rather than the default `iptables` driver, see the [dnsmasq PXE filter](#) description.
- `store_data` in the `processing` section defines where introspection data is stored and takes one of three values:
 - `none` introspection data is not stored (the default)

database introspection data is stored in the database (recommended for standalone deployments)
swift introspection data is stored in the Object Store service (recommended for full openstack deployments)

Note: It is possible to create third party storage backends using the `ironic_inspector.introspection_data.store` entry point.

See comments inside *the sample configuration* for other possible configuration options.

Note: Configuration file contains a password and thus should be owned by `root` and should have access rights like `0600`.

Here is an example `inspector.conf` (adapted from a gate run):

```
[DEFAULT]
debug = false
rootwrap_config = /etc/ironic-inspector/rootwrap.conf

[database]
connection = mysql+pymysql://root:<PASSWORD>@127.0.0.1/ironic_inspector?
    ↪charset=utf8

[pxe_filter]
driver=iptables

[iptables]
dnsmasq_interface = br-ctlplane

[ironic]
os_region = RegionOne
project_name = service
password = <PASSWORD>
username = ironic-inspector
auth_url = http://127.0.0.1/identity
auth_type = password

[keystone_authtoken]
www_authenticate_uri = http://127.0.0.1/identity
project_name = service
password = <PASSWORD>
username = ironic-inspector
auth_url = http://127.0.0.1/identity_v2_admin
auth_type = password

[processing]
ramdisk_logs_dir = /var/log/ironic-inspector/ramdisk
store_data = swift
```

(continues on next page)

(continued from previous page)

```
[swift]
os_region = RegionOne
project_name = service
password = <PASSWORD>
username = ironic-inspector
auth_url = http://127.0.0.1/identity
auth_type = password
```

Note: Set debug = true if you want to see complete logs.

ironic-inspector requires root rights for managing iptables. It gets them by running **ironic-inspector-rootwrap** utility with sudo. To allow it, copy file **rootwrap.conf** and directory **rootwrap.d** to the configuration directory (e.g. /etc/ironic-inspector/) and create file /etc/sudoers.d/ironic-inspector-rootwrap with the following content:

```
Defaults:stack !requiretty
stack ALL=(root) NOPASSWD: /usr/bin/ironic-inspector-rootwrap /etc/ironic-
↪inspector/rootwrap.conf *
```

Danger: Be very careful about typos in /etc/sudoers.d/ironic-inspector-rootwrap as any typo will break sudo for **ALL** users on the system. Especially, make sure there is a new line at the end of this file.

Note: **rootwrap.conf** and all files in **rootwrap.d** must be writeable only by root.

Note: If you store **rootwrap.d** in a different location, make sure to update the *filters_path* option in **rootwrap.conf** to reflect the change.

If your **rootwrap.conf** is in a different location, then you need to update the *rootwrap_config* option in **ironic-inspector.conf** to point to that location.

Replace **stack** with whatever user youll be using to run **ironic-inspector**.

Configuring IPA

ironic-python-agent is a ramdisk developed for **ironic** and support for **ironic-inspector** was added during the Liberty cycle. This is the default ramdisk starting with the Mitaka release.

Note: You need at least 2 GiB of RAM on the machines to use IPA built with **diskimage-builder** and at least 384 MiB to use the *TinyIPA*.

To build an **ironic-python-agent** ramdisk, use **ironic-python-agent-builder**. Alternatively, you can download a **prebuild** image.

For local testing and CI purposes you can use a [TinyIPA image](#).

Configuring PXE

For the PXE boot environment, you'll need:

- TFTP server running and accessible (see below for using *dnsmasq*). Ensure *pxelinux.0* is present in the TFTP root.

Copy *ironic-python-agent.kernel* and *ironic-python-agent.initramfs* to the TFTP root as well.

- Next, setup \$TFTPROOT/pxelinux.cfg/default as follows:

```
default introspect

label introspect
kernel ironic-python-agent.kernel
append initrd=ironic-python-agent.initramfs ipa-inspection-callback-
→url=http://{IP}:5050/v1/continue systemd.journald.forward_to_console=yes

ipappend 3
```

Replace {IP} with IP of the machine (do not use loopback interface, it will be accessed by ramdisk on a booting machine).

Note: While *systemd.journald.forward_to_console=yes* is not actually required, it will substantially simplify debugging if something goes wrong. You can also enable IPA debug logging by appending *ipa-debug=1*.

IPA is pluggable: you can insert introspection plugins called *collectors* into it. For example, to enable a very handy logs collector (sending ramdisk logs to **ironic-inspector**), modify the append line in \$TFTPROOT/pxelinux.cfg/default:

```
append initrd=ironic-python-agent.initramfs ipa-inspection-callback-
→url=http://{IP}:5050/v1/continue ipa-inspection-collectors=default,logs
→systemd.journald.forward_to_console=yes
```

Note: You probably want to always keep the **default** collector, as it provides the basic information required for introspection.

- You need PXE boot server (e.g. *dnsmasq*) running on **the same** machine as **ironic-inspector**. Don't do any firewall configuration: **ironic-inspector** will handle it for you. In **ironic-inspector** configuration file set *dnsmasq_interface* to the interface your PXE boot server listens on. Here is an example *dnsmasq.conf*:

```
port=0
interface={INTERFACE}
bind-interfaces
dhcp-range={DHCP IP RANGE, e.g. 192.168.0.50,192.168.0.150}
```

(continues on next page)

(continued from previous page)

```
enable-tftp
tftp-root={TFTP ROOT, e.g. /tftpboot}
dhcp-boot=pxelinux.0
dhcp-sequential-ip
```

Note: `dhcp-sequential-ip` is used because otherwise a lot of nodes booting simultaneously cause conflicts - the same IP address is suggested to several nodes.

Configuring iPXE

iPXE allows better scaling as it primarily uses the HTTP protocol instead of slow and unreliable TFTP. You still need a TFTP server as a fallback for nodes not supporting iPXE. To use iPXE, you'll need:

- TFTP server running and accessible (see above for using `dnsmasq`). Ensure `undionly.kpxe` is present in the TFTP root. If any of your nodes boot with UEFI, you'll also need `ipxe.efi` there.
- You also need an HTTP server capable of serving static files. Copy `ironic-python-agent.kernel` and `ironic-python-agent.initramfs` there.
- Create a file called `inspector.ipxe` in the HTTP root (you can name and place it differently, just don't forget to adjust the `dnsmasq.conf` example below):

```
#!ipxe

:retry_dhcp
dhcp || goto retry_dhcp

:retry_boot
imgfree
kernel --timeout 30000 http://{IP}:8088/ironic-python-agent.kernel ipa-
    ↲inspection-callback-url=http://{IP}[:5050/v1/continue] systemd.journald.
    ↲forward_to_console=yes BOOTIF=${mac} initrd=agent.ramdisk || goto retry_
    ↲boot
initrd --timeout 30000 http://{IP}:8088/ironic-python-agent.ramdisk ||_
    ↲goto retry_boot
boot
```

Note: Older versions of the iPXE ROM tend to misbehave on unreliable network connection, thus we use the timeout option with retries.

Just like with PXE, you can customize the list of collectors by appending the `ipa-inspection-collectors` kernel option. For example:

```
ipa-inspection-collectors=default,logs,extra_hardware
```

- Just as with PXE, you'll need a PXE boot server. The configuration, however, will be different. Here is an example `dnsmasq.conf`:

```

port=0
interface={INTERFACE}
bind-interfaces
dhcp-range={DHCP IP RANGE, e.g. 192.168.0.50,192.168.0.150}
enable-tftp
tftp-root={TFTP ROOT, e.g. /tftpboot}
dhcp-sequential-ip
dhcp-match=ipxe,175
dhcp-match=set:efi,option:client-arch,7
dhcp-match=set:efi,option:client-arch,9
dhcp-match=set:efi,option:client-arch,11
# dhcpcv6.option: Client System Architecture Type (61)
dhcp-match=set:efi6,option6:61,0007
dhcp-match=set:efi6,option6:61,0009
dhcp-match=set:efi6,option6:61,0011
dhcp-userclass=set:ipxe6,iPXE
# Client is already running iPXE; move to next stage of chainloading
dhcp-boot=tag:ipxe,http://{IP}:8088/inspector.ipxe
# Client is PXE booting over EFI without iPXE ROM,
# send EFI version of iPXE chainloader
dhcp-boot=tag:efi,tag:!ipxe,ipxe.efi
dhcp-option=tag:efi6,tag:!ipxe6,option6:bootfile-url,tftp://{IP}/ipxe.efi
# Client is running PXE over BIOS; send BIOS version of iPXE chainloader
dhcp-boot=undionly.kpxe,localhost.localdomain,{IP}

```

First, we configure the same common parameters as with PXE. Then we define `ipxe` and `efi` tags for IPv4 and `ipxe6` and `efi6` for IPv6. Nodes already supporting iPXE are ordered to download and execute `inspector.ipxe`. Nodes without iPXE booted with UEFI will get `ipxe.efi` firmware to execute, while the remaining will get `undionly.kpxe`.

Configuring PXE for aarch64

For aarch64 Bare Metals, the PXE boot environment is basically the same as x86_64, youll need:

- TFTP server running and accessible (see below for using `dnsmasq`). Ensure `grubaa64.efi` is present in the TFTP root. The firmware can be retrieved from the installation distributions for aarch64.
- Copy `ironic-agent.kernel` and `ironic-agent.initramfs` to the TFTP root as well. Note that the ramdisk needs to be pre-built on an aarch64 machine with tools like `ironic-python-agent-builder`, see <https://docs.openstack.org/ironic-python-agent-builder/latest/admin/dib.html> for how to build ramdisk for aarch64.
- Next, setup `$TFTPROOT/EFI/BOOT/grub.cfg` as follows:

```

set default="1"
set timeout=5

menuentry 'Introspection for aarch64' {
    linux ironic-agent.kernel text showopts selinux=0 ipa-inspection-
    ↳callback-url=http://{IP}:5050/v1/continue&ipa-inspection-
    ↳collectors=default&ipa.collect_lldp=1&systemd.journald.forward_to_
    ↳console=no

```

(continues on next page)

(continued from previous page)

```
initrd ironic-agent.initramfs  
}
```

Replace {IP} with IP of the machine (do not use loopback interface, it will be accessed by ramdisk on a booting machine).

- Update DHCP options for aarch64, here is an example *dnsmasq.conf*:

```
port=0  
interface={INTERFACE}  
bind-interfaces  
dhcp-range={DHCP IP RANGE, e.g. 192.168.0.50,192.168.0.150}  
enable-tftp  
dhcp-match=aarch64, option:client-arch, 11 # aarch64  
dhcp-boot=tag:aarch64, grubaa64.efi  
tftp-root={TFTP ROOT, e.g. /tftpboot}  
dhcp-sequential-ip
```

Configuring PXE for Multi-arch

If the environment consists of bare metals with different architectures, normally different ramdisks are required for each architecture. The grub built-in variable `grub_cpu` could be used to locate the correct config file for each of them.

For example, setup `$TFTPROOT/EFI/BOOT/grub.cfg` as following:

```
set default=master  
set timeout=5  
set hidden_timeout_quiet=false  
  
menuentry "master" {  
configfile /tftpboot/grub-${grub_cpu}.cfg  
}
```

Prepare specific grub config for each existing architectures, e.g. `grub-arm64.cfg` for ARM64 and `grub-x86_64.cfg` for x86_64.

Update `dnsmasq` configuration to contain options for supported architectures.

3.1.4 Managing the `ironic-inspector` Database

`ironic-inspector` provides a command line client for managing its database. This client can be used for upgrading, and downgrading the database using `alembic` migrations.

If this is your first time running `ironic-inspector` to migrate the database, simply run:

```
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf  
↳upgrade
```

If you have previously run a version of `ironic-inspector` earlier than 2.2.0, the safest thing is to delete the existing SQLite database and run `upgrade` as shown above. However, if you want to save the existing

database, to ensure your database will work with the migrations, you'll need to run an extra step before upgrading the database. You only need to do this the first time running version 2.2.0 or later.

If you are upgrading from **ironic-inspector** version 2.1.0 or lower:

```
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf  
↳stamp --revision 578f84f38d  
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf  
↳upgrade
```

If you are upgrading from a git master install of the **ironic-inspector** after *rules* were introduced:

```
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf  
↳stamp --revision d588418040d  
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf  
↳upgrade
```

Other available commands can be discovered by running:

```
ironic-inspector-dbsync --help
```

3.1.5 Running

Running in standalone mode

Execute:

```
ironic-inspector --config-file /etc/ironic-inspector/inspector.conf
```

Running in non-standalone mode

API service can be started in development mode with:

```
ironic-inspector-api-wsgi -p 5050 -- --config-file /etc/ironic-inspector/  
↳inspector.conf
```

For production, the ironic-inspector API service should be hosted under a web service. Below is a sample configuration for Apache with module mod_wsgi:

```
Listen 5050

<VirtualHost *:5050>
    WSGIDaemonProcess ironic-inspector user=stack group=stack threads=10
    ↳display-name=%{GROUP}
    WSGIScriptAlias / /usr/local/bin/ironic-inspector-api-wsgi

    SetEnv APACHE_RUN_USER stack
    SetEnv APACHE_RUN_GROUP stack
    WSGIProcessGroup ironic-inspector
```

(continues on next page)

(continued from previous page)

```
ErrorLog /var/log/apache2/ironic_inspector_error.log
LogLevel info
CustomLog /var/log/apache2/ironic_inspector_access.log combined

<Directory /opt/stack/ironic-inspector/ironic_inspector/cmd>
    WSGIProcessGroup ironic-inspector
    WSGIApplicationGroup %{GLOBAL}
    AllowOverride All
    Require all granted
</Directory>
</VirtualHost>
```

You can refer to [ironic installation document](#) for more guides.

ironic-inspector conductor can be started with:

```
ironic-inspector-conductor --config-file /etc/ironic-inspector/inspector.conf
```

3.2 Command References

Here are references for commands not elsewhere documented.

3.2.1 ironic-inspector-status

Synopsis

```
ironic-inspector-status <category> <command> [<args>]
```

Description

ironic-inspector-status is a tool that provides routines for checking the status of the ironic-inspector deployment.

Options

The standard pattern for executing a **ironic-inspector-status** command is:

```
ironic-inspector-status <category> <command> [<args>]
```

Run without arguments to see a list of available command categories:

```
ironic-inspector-status
```

Categories are:

- upgrade

Detailed descriptions are below.

You can also run with a category argument such as upgrade to see a list of all commands in that category:

```
ironic-inspector-status upgrade
```

These sections describe the available categories and arguments for **ironic-inspector-status**.

Upgrade

ironic-status upgrade check Performs a release-specific readiness check before restarting services with new code. This command expects to have complete configuration and access to databases and services.

Return Codes

Return code	Description
0	All upgrade readiness checks passed successfully and there is nothing to do.
1	At least one check encountered an issue and requires further investigation. This is considered a warning but the upgrade may be OK.
2	There was an upgrade status check failure that needs to be investigated. This should be considered something that stops an upgrade.
255	An unexpected error occurred.

History of Checks

Wallaby

- Adds initial status check command as it was not previously needed as the database structure and use of ironic-inspectors of ironic-inspector did not require the command previously.
- Adds a check to validate the configured policy file is not JSON based as JSON based policies have been deprecated.

3.3 Configuration Guide

The ironic-inspector service operation is defined by a configuration file. The overview of configuration file options follow.

3.3.1 ironic-inspector.conf

DEFAULT

debug

Type boolean

Default False

Mutable This option can be changed without restarting.

If set to true, the logging level will be set to DEBUG instead of the default INFO level.

`log_config_append`

Type string

Default <None>

Mutable This option can be changed without restarting.

The name of a logging configuration file. This file is appended to any existing logging configuration files. For details about logging configuration files, see the Python logging module documentation. Note that when logging configuration files are used then all logging configuration is set in the configuration file and other logging configuration options are ignored (for example, log-date-format).

Table 1: Deprecated Variations

Group	Name
DEFAULT	log-config
DEFAULT	log_config

`log_date_format`

Type string

Default %Y-%m-%d %H:%M:%S

Defines the format string for %(asctime)s in log records. Default: the value above . This option is ignored if `log_config_append` is set.

`log_file`

Type string

Default <None>

(Optional) Name of log file to send logging output to. If no default is set, logging will go to stderr as defined by `use_stderr`. This option is ignored if `log_config_append` is set.

Table 2: Deprecated Variations

Group	Name
DEFAULT	logfile

`log_dir`

Type string

Default <None>

(Optional) The base directory used for relative `log_file` paths. This option is ignored if `log_config_append` is set.

Table 3: Deprecated Variations

Group	Name
DEFAULT	logdir

`watch_log_file`

Type boolean

Default False

Uses logging handler designed to watch file system. When log file is moved or removed this handler will open a new log file with specified path instantaneously. It makes sense only if log_file option is specified and Linux platform is used. This option is ignored if log_config_append is set.

use_syslog

Type boolean

Default False

Use syslog for logging. Existing syslog format is DEPRECATED and will be changed later to honor RFC5424. This option is ignored if log_config_append is set.

use_journal

Type boolean

Default False

Enable journald for logging. If running in a systemd environment you may wish to enable journal support. Doing so will use the journal native protocol which includes structured metadata in addition to log messages. This option is ignored if log_config_append is set.

syslog_log_facility

Type string

Default LOG_USER

Syslog facility to receive log lines. This option is ignored if log_config_append is set.

use_json

Type boolean

Default False

Use JSON formatting for logging. This option is ignored if log_config_append is set.

use_stderr

Type boolean

Default False

Log output to standard error. This option is ignored if log_config_append is set.

use_eventlog

Type boolean

Default False

Log output to Windows Event Log.

log_rotate_interval

Type integer

Default 1

The amount of time before the log files are rotated. This option is ignored unless log_rotation_type is set to interval.

`log_rotate_interval_type`

Type string

Default days

Valid Values Seconds, Minutes, Hours, Days, Weekday, Midnight

Rotation interval type. The time of the last file change (or the time when the service was started) is used when scheduling the next rotation.

`max_logfile_count`

Type integer

Default 30

Maximum number of rotated log files.

`max_logfile_size_mb`

Type integer

Default 200

Log file maximum size in MB. This option is ignored if `log_rotation_type` is not set to size.

`log_rotation_type`

Type string

Default none

Valid Values interval, size, none

Log rotation type.

Possible values

interval Rotate logs at predefined time intervals.

size Rotate logs once they reach a predefined size.

none Do not rotate log files.

`logging_context_format_string`

Type string

Default %(asctime)s.%(msecs)03d %(process)d %(levelname)s %(name)s
[%request_id)s %(user_identity)s] %(instance)s%(message)s

Format string to use for log messages with context. Used by `oslo_log.formatters.ContextFormatter`

`logging_default_format_string`

Type string

Default %(asctime)s.%(msecs)03d %(process)d %(levelname)s %(name)s
[-] %(instance)s%(message)s

Format string to use for log messages when context is undefined. Used by `oslo_log.formatters.ContextFormatter`

logging_debug_format_suffix**Type** string**Default** %(funcName)s %(pathname)s:%(lineno)d

Additional data to append to log message when logging level for the message is DEBUG. Used by oslo_log.formatters.ContextFormatter

logging_exception_prefix**Type** string**Default** %(asctime)s.%(msecs)03d %(process)d ERROR %(name)s %(instance)s

Prefix each line of exception output with this format. Used by oslo_log.formatters.ContextFormatter

logging_user_identity_format**Type** string**Default** %(user)s %(tenant)s %(domain)s %(user_domain)s %(project_domain)s

Defines the format string for %(user_identity)s that is used in logging_context_format_string. Used by oslo_log.formatters.ContextFormatter

default_log_levels**Type** list**Default** ['sqlalchemy=WARNING', 'iso8601=WARNING', 'requests=WARNING', 'urllib3.connectionpool=WARNING', 'keystonemiddleware=WARNING', 'keystoneauth=WARNING', 'ironicclient=WARNING', 'amqp=WARNING', 'amqplib=WARNING', 'oslo.messaging=WARNING', 'oslo.messaging=WARNING']

List of package logging levels in logger=LEVEL pairs. This option is ignored if log_config_append is set.

publish_errors**Type** boolean**Default** False

Enables or disables publication of error events.

instance_format**Type** string**Default** "[instance: %(uuid)s] "

The format for an instance that is passed with the log message.

instance_uuid_format**Type** string**Default** "[instance: %(uuid)s] "

The format for an instance UUID that is passed with the log message.

rate_limit_interval

Type integer

Default 0

Interval, number of seconds, of log rate limiting.

rate_limit_burst

Type integer

Default 0

Maximum number of logged messages per rate_limit_interval.

rate_limit_except_level

Type string

Default CRITICAL

Log level name used by rate limiting: CRITICAL, ERROR, INFO, WARNING, DEBUG or empty string. Logs with level greater or equal to rate_limit_except_level are not filtered. An empty string means that all levels are filtered.

fatal_deprecations

Type boolean

Default False

Enables or disables fatal status of deprecations.

backdoor_port

Type string

Default <None>

Enable eventlet backdoor. Acceptable values are 0, <port>, and <start>:<end>, where 0 results in listening on a random tcp port number; <port> results in listening on the specified port number (and not enabling backdoor if that port is in use); and <start>:<end> results in listening on the smallest unused port number within the specified range of port numbers. The chosen port is displayed in the services log file.

backdoor_socket

Type string

Default <None>

Enable eventlet backdoor, using the provided path as a unix socket that can receive connections. This option is mutually exclusive with backdoor_port in that only one should be provided. If both are provided then the existence of this option overrides the usage of that option. Inside the path {pid} will be replaced with the PID of the current process.

log_options

Type boolean

Default True

Enables or disables logging values of all registered options when starting a service (at DEBUG level).

graceful_shutdown_timeout**Type** integer**Default** 60

Specify a timeout after which a gracefully shutdown server will exit. Zero value means endless wait.

api_paste_config**Type** string**Default** api-paste.ini

File name for the paste.deploy config for api service

wsgi_log_format**Type** string**Default** %(client_ip)s "%(request_line)s" status: %(status_code)s
len: %(body_length)s time: %(wall_seconds).7f

A python format string that is used as the template to generate log lines. The following values can beformatted into it: client_ip, date_time, request_line, status_code, body_length, wall_seconds.

tcp_keepidle**Type** integer**Default** 600

Sets the value of TCP_KEEPIDLE in seconds for each server socket. Not supported on OS X.

wsgi_default_pool_size**Type** integer**Default** 100

Size of the pool of greenthreads used by wsgi

max_header_line**Type** integer**Default** 16384

Maximum line size of message headers to be accepted. max_header_line may need to be increased when using large tokens (typically those generated when keystone is configured to use PKI tokens with big service catalogs).

wsgi_keep_alive**Type** boolean**Default** True

If False, closes the client socket connection explicitly.

client_socket_timeout**Type** integer**Default** 900

Timeout for client connections socket operations. If an incoming connection is idle for this number of seconds it will be closed. A value of 0 means wait forever.

wsgi_server_debug

Type boolean

Default False

True if the server should send exception tracebacks to the clients on 500 errors. If False, the server will respond with empty bodies.

rpc_conn_pool_size

Type integer

Default 30

Minimum Value 1

Size of RPC connection pool.

Table 4: Deprecated Variations

Group	Name
DEFAULT	rpc_conn_pool_size

conn_pool_min_size

Type integer

Default 2

The pool size limit for connections expiration policy

conn_pool_ttl

Type integer

Default 1200

The time-to-live in sec of idle connections in the pool

executor_thread_pool_size

Type integer

Default 64

Size of executor thread pool when executor is threading or eventlet.

Table 5: Deprecated Variations

Group	Name
DEFAULT	rpc_thread_pool_size

rpc_response_timeout

Type integer

Default 60

Seconds to wait for a response from a call.

transport_url

Type string

Default rabbit://

The network address and optional user credentials for connecting to the messaging backend, in URL format. The expected format is:

driver://[user:pass@]host:port[,userN:passN@]hostN:portN]/virtual_host?query

Example: rabbit://rabbitmq:password@127.0.0.1:5672//

For full details on the fields in the URL see the documentation of oslo.messaging.TransportURL at <https://docs.openstack.org/oslo.messaging/latest/reference/transport.html>

control_exchange

Type string

Default openstack

The default exchange under which topics are scoped. May be overridden by an exchange name specified in the transport_url option.

rpc_ping_enabled

Type boolean

Default False

Add an endpoint to answer to ping calls. Endpoint is named oslo_rpc_server_ping

listen_address

Type string

Default ::

IP to listen on.

listen_port

Type port number

Default 5050

Minimum Value 0

Maximum Value 65535

Port to listen on.

host

Type string

Default localhost

This option has a sample default set, which means that its actual default value may vary from the one documented above.

Name of this node. This can be an opaque identifier. It is not necessarily a hostname, FQDN, or IP address. However, the node name must be valid within an AMQP key, and if using ZeroMQ, a valid hostname, FQDN, or IP address.

auth_strategy

Type string

Default keystone

Valid Values noauth, keystone, http_basic

Authentication method used on the ironic-inspector API. noauth, keystone or http_basic are valid options. noauth will disable all authentication.

Possible values

noauth no authentication

keystone use the Identity service for authentication

http_basic HTTP basic authentication

http_basic_auth_user_file

Type string

Default /etc/ironic-inspector/htpasswd

Path to Apache format user authentication file used when auth_strategy=http_basic

timeout

Type integer

Default 3600

Maximum Value 315576000

Timeout after which introspection is considered failed, set to 0 to disable.

clean_up_period

Type integer

Default 60

Minimum Value 0

Amount of time in seconds, after which repeat clean up of timed out nodes and old nodes status information. WARNING: If set to a value of 0, then the periodic task is disabled and inspector will not sync with ironic to complete the internal clean-up process. Not advisable if the deployment uses a PXE filter, and will result in the ironic-inspector ceasing periodic cleanup activities.

leader_election_interval

Type integer

Default 10

Interval (in seconds) between leader elections.

use_ssl

Type boolean

Default False

SSL Enabled/Disabled

max_concurrency

Type integer

Default 1000

Minimum Value 2

The green thread pool size.

introspection_delay

Type integer

Default 5

Delay (in seconds) between two introspections. Only applies when boot is managed by ironic-inspector (i.e. manage_boot==True).

ipmi_address_fields

Type list

Default ['redfish_address', 'ilo_address', 'drac_host',
'drac_address', 'ibmc_address']

Ironic driver_info fields that are equivalent to ipmi_address.

rootwrap_config

Type string

Default /etc/ironic-inspector/rootwrap.conf

Path to the rootwrap configuration file to use for running commands as root

api_max_limit

Type integer

Default 1000

Minimum Value 1

Limit the number of elements an API list-call returns

can_manage_boot

Type boolean

Default True

Whether the current installation of ironic-inspector can manage PXE booting of nodes. If set to False, the API will reject introspection requests with manage_boot missing or set to True.

enable_mdns

Type boolean

Default False

Whether to enable publishing the ironic-inspector API endpoint via multicast DNS.

standalone

Type boolean

Default True

Whether to run ironic-inspector as a standalone service. Its EXPERIMENTAL to set to False.

capabilities

boot_mode

Type boolean

Default False

Whether to store the boot mode (BIOS or UEFI).

cpu_flags

Type dict

Default {'vmx': 'cpu_vt', 'svm': 'cpu_vt', 'aes': 'cpu_aes',
'pse': 'cpu_hugepages', 'pdpe1gb': 'cpu_hugepages_1g',
'smx': 'cpu_txt'}

Mapping between a CPU flag and a capability to set if this flag is present.

coordination

backend_url

Type string

Default memcached://localhost:11211

The backend URL to use for distributed coordination. EXPERIMENTAL.

cors

allowed_origin

Type list

Default <None>

Indicate whether this resource may be shared with the domain received in the requests origin header. Format: <protocol>://<host>[:<port>], no trailing slash. Example: <https://horizon.example.com>

allow_credentials

Type boolean

Default True

Indicate that the actual request can include user credentials

expose_headers

Type list

Default []

Indicate which headers are safe to expose to the API. Defaults to HTTP Simple Headers.

max_age

Type integer

Default 3600

Maximum cache age of CORS preflight requests.

allow_methods

Type list

Default ['GET', 'POST', 'PUT', 'HEAD', 'PATCH', 'DELETE', 'OPTIONS']

Indicate which methods can be used during the actual request.

allow_headers

Type list

Default ['X-Auth-Token', 'X-OpenStack-Ironic-Inspector-API-Minimum-Version', 'X-OpenStack-Ironic-Inspector-API-Maximum-Version', 'X-OpenStack-Ironic-Inspector-API-Version']

Indicate which header field names may be used during the actual request.

database**sqlite_synchronous**

Type boolean

Default True

If True, SQLite uses synchronous mode.

Table 6: Deprecated Variations

Group	Name
DEFAULT	sqlite_synchronous

backend

Type string

Default sqlalchemy

The back end to use for the database.

Table 7: Deprecated Variations

Group	Name
DEFAULT	db_backend

connection

Type string

Default <None>

The SQLAlchemy connection string to use to connect to the database.

Table 8: Deprecated Variations

Group	Name
DEFAULT	sql_connection
DATABASE	sql_connection
sql	connection

slave_connection

Type string

Default <None>

The SQLAlchemy connection string to use to connect to the slave database.

mysql_sql_mode

Type string

Default TRADITIONAL

The SQL mode to be used for MySQL sessions. This option, including the default, overrides any server-set SQL mode. To use whatever SQL mode is set by the server configuration, set this to no value. Example: mysql_sql_mode=

mysql_enable_ndb

Type boolean

Default False

If True, transparently enables support for handling MySQL Cluster (NDB).

connection_recycle_time

Type integer

Default 3600

Connections which have been present in the connection pool longer than this number of seconds will be replaced with a new one the next time they are checked out from the pool.

max_pool_size

Type integer

Default 5

Maximum number of SQL connections to keep open in a pool. Setting a value of 0 indicates no limit.

max_retries

Type integer

Default 10

Maximum number of database connection retries during startup. Set to -1 to specify an infinite retry count.

Table 9: Deprecated Variations

Group	Name
DEFAULT	sql_max_retries
DATABASE	sql_max_retries

retry_interval**Type** integer**Default** 10

Interval between retries of opening a SQL connection.

Table 10: Deprecated Variations

Group	Name
DEFAULT	sql_retry_interval
DATABASE	reconnect_interval

max_overflow**Type** integer**Default** 50

If set, use this value for max_overflow with SQLAlchemy.

Table 11: Deprecated Variations

Group	Name
DEFAULT	sql_max_overflow
DATABASE	sqlalchemy_max_overflow

connection_debug**Type** integer**Default** 0**Minimum Value** 0**Maximum Value** 100

Verbosity of SQL debugging information: 0=None, 100=Everything.

Table 12: Deprecated Variations

Group	Name
DEFAULT	sql_connection_debug

connection_trace**Type** boolean**Default** False

Add Python stack traces to SQL as comment strings.

Table 13: Deprecated Variations

Group	Name
DEFAULT	sql_connection_trace

pool_timeout

Type integer

Default <None>

If set, use this value for pool_timeout with SQLAlchemy.

Table 14: Deprecated Variations

Group	Name
DATABASE	sqlalchemy_pool_timeout

use_db_reconnect

Type boolean

Default False

Enable the experimental use of database reconnect on connection lost.

db_retry_interval

Type integer

Default 1

Seconds between retries of a database transaction.

db_inc_retry_interval

Type boolean

Default True

If True, increases the interval between retries of a database operation up to db_max_retry_interval.

db_max_retry_interval

Type integer

Default 10

If db_inc_retry_interval is set, the maximum seconds between retries of a database operation.

db_max_retries

Type integer

Default 20

Maximum retries in case of connection error or deadlock error before error is raised. Set to -1 to specify an infinite retry count.

connection_parameters

Type string

Default ''

Optional URL parameters to append onto the connection URL at connect time; specify as param1=value1¶m2=value2&

discovery

enroll_node_driver

Type string

Default fake-hardware

The name of the Ironic driver used by the enroll hook when creating a new node in Ironic.

enroll_node_fields

Type dict

Default {}

Additional fields to set on newly discovered nodes.

enabled_bmc_address_version

Type list

Default ['4', '6']

IP version of BMC address that will be used when enrolling a new node in Ironic. Defaults to 4,6. Could be 4 (use v4 address only), 4,6 (v4 address have higher priority and if both addresses found v6 version is ignored), 6,4 (v6 is desired but fall back to v4 address for BMCs having v4 address, opposite to 4,6), 6 (use v6 address only and ignore v4 version).

dnsmasq_pxe_filter

dhcp_hostsdir

Type string

Default /var/lib/ironic-inspector/dhcp-hostsdir

The MAC address cache directory, exposed to dnsmasq. This directory is expected to be in exclusive control of the driver.

purge_dhcp_hostsdir

Type boolean

Default True

Purge the hostsdir upon driver initialization. Setting to false should only be performed when the deployment of inspector is such that there are multiple processes executing inside of the same host and namespace. In this case, the Operator is responsible for setting up a custom cleaning facility.

dnsmasq_start_command

Type string

Default ''

A (shell) command line to start the dnsmasq service upon filter initialization. Default: dont start.

dnsmasq_stop_command

Type string

Default ''

A (shell) command line to stop the dnsmasq service upon inspector (error) exit. Default: dont stop.

extra_hardware

strict

Type boolean

Default False

If True, refuse to parse extra data if at least one record is too short. Additionally, remove the incoming data even if parsing failed.

healthcheck

path

Type string

Default /healthcheck

The path to respond to healthcheck requests on.

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

detailed

Type boolean

Default False

Show more detailed information as part of the response. Security note: Enabling this option may expose sensitive details about the service being monitored. Be sure to verify that it will not violate your security policies.

backends

Type list

Default []

Additional backends that can perform health checks and report that information back as part of a request.

disable_by_file_path

Type string

Default <None>

Check the presence of a file to determine if an application is running on a port. Used by DisableByFileHealthcheck plugin.

disable_by_file_paths

Type list

Default []

Check the presence of a file based on a port to determine if an application is running on a port. Expects a port:path list of strings. Used by DisableByFilesPortsHealthcheck plugin.

enabled

Type boolean

Default False

Enable the health check endpoint at /healthcheck. Note that this is unauthenticated. More information is available at https://docs.openstack.org/oslo.middleware/latest/reference/healthcheck_plugins.html.

iptables**dnsmasq_interface**

Type string

Default br-ctlplane

Interface on which dnsmasq listens, the default is for VMs.

firewall_chain

Type string

Default ironic-inspector

iptables chain name to use.

ethoib_interfaces

Type list

Default []

List of Ethernet Over InfiniBand interfaces on the Inspector host which are used for physical access to the DHCP network. Multiple interfaces would be attached to a bond or bridge specified in dnsmasq_interface. The MACs of the InfiniBand nodes which are not in desired state are going to be blacklisted based on the list of neighbor MACs on these interfaces.

ip_version

Type string

Default 4

Valid Values 4, 6

The IP version that will be used for iptables filter. Defaults to 4.

Possible values

4 IPv4

6 IPv6

ironic

auth_url

Type unknown type

Default <None>

Authentication URL

auth_type

Type unknown type

Default <None>

Authentication type to load

Table 15: Deprecated Variations

Group	Name
ironic	auth_plugin

cafile

Type string

Default <None>

PEM encoded Certificate Authority to use when verifying HTTPs connections.

certfile

Type string

Default <None>

PEM encoded client certificate cert file

collect_timing

Type boolean

Default False

Collect per-API call timing information.

connect_retries

Type integer

Default <None>

The maximum number of retries that should be attempted for connection errors.

connect_retry_delay

Type floating point

Default <None>

Delay (in seconds) between two retries for connection errors. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

default_domain_id

Type unknown type

Default <None>

Optional domain ID to use with v3 and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

default_domain_name

Type unknown type

Default <None>

Optional domain name to use with v3 API and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

domain_id

Type unknown type

Default <None>

Domain ID to scope to

domain_name

Type unknown type

Default <None>

Domain name to scope to

endpoint_override

Type string

Default <None>

Always use this endpoint URL for requests for this client. NOTE: The unversioned endpoint should be specified here; to request a particular API version, use the *version*, *min-version*, and/or *max-version* options.

insecure

Type boolean

Default False

Verify HTTPS connections.

keyfile

Type string

Default <None>

PEM encoded client certificate key file

max_version

Type string

Default <None>

The maximum major version of a given API, intended to be used as the upper bound of a range with min_version. Mutually exclusive with version.

max_retries

Type integer

Default 30

Maximum number of retries in case of conflict error (HTTP 409).

min_version

Type string

Default <None>

The minimum major version of a given API, intended to be used as the lower bound of a range with max_version. Mutually exclusive with version. If min_version is given with no max_version it is as if max version is latest.

password

Type unknown type

Default <None>

Users password

project_domain_id

Type unknown type

Default <None>

Domain ID containing project

project_domain_name

Type unknown type

Default <None>

Domain name containing project

project_id

Type unknown type

Default <None>

Project ID to scope to

Table 16: Deprecated Variations

Group	Name
ironic	tenant-id
ironic	tenant_id

project_name**Type** unknown type**Default** <None>

Project name to scope to

Table 17: Deprecated Variations

Group	Name
ironic	tenant-name
ironic	tenant_name

region_name**Type** string**Default** <None>

The default region_name for endpoint URL discovery.

retry_interval**Type** integer**Default** 2

Interval between retries in case of conflict error (HTTP 409).

service_name**Type** string**Default** <None>

The default service_name for endpoint URL discovery.

service_type**Type** string**Default** baremetal

The default service_type for endpoint URL discovery.

split_loggers**Type** boolean**Default** False

Log requests to multiple loggers.

status_code_retries**Type** integer**Default** <None>

The maximum number of retries that should be attempted for retriable HTTP status codes.

status_code_retry_delay**Type** floating point

Default <None>

Delay (in seconds) between two retries for retriable status codes. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

system_scope

Type unknown type

Default <None>

Scope for system operations

tenant_id

Type unknown type

Default <None>

Tenant ID

tenant_name

Type unknown type

Default <None>

Tenant Name

timeout

Type integer

Default <None>

Timeout value for http requests

trust_id

Type unknown type

Default <None>

Trust ID

user_domain_id

Type unknown type

Default <None>

Users domain id

user_domain_name

Type unknown type

Default <None>

Users domain name

user_id

Type unknown type

Default <None>

User id

username**Type** unknown type**Default** <None>

Username

Table 18: Deprecated Variations

Group	Name
ironic	user-name
ironic	user_name

valid_interfaces**Type** list**Default** ['internal', 'public']

List of interfaces, in order of preference, for endpoint URL.

version**Type** string**Default** <None>

Minimum Major API version within a given Major API version for endpoint URL discovery. Mutually exclusive with min_version and max_version

keystone_auth_token**www_authenticate_uri****Type** string**Default** <None>

Complete public Identity API endpoint. This endpoint should not be an admin endpoint, as it should be accessible by all end users. Unauthenticated clients are redirected to this endpoint to authenticate. Although this endpoint should ideally be unversioned, client support in the wild varies. If you're using a versioned v2 endpoint here, then this should *not* be the same endpoint the service user utilizes for validating tokens, because normal end users may not be able to reach that endpoint.

Table 19: Deprecated Variations

Group	Name
keystone_auth_token	auth_uri

auth_uri**Type** string**Default** <None>

Complete public Identity API endpoint. This endpoint should not be an admin endpoint, as it should be accessible by all end users. Unauthenticated clients are redirected to this endpoint to

authenticate. Although this endpoint should ideally be unversioned, client support in the wild varies. If you're using a versioned v2 endpoint here, then this should *not* be the same endpoint the service user utilizes for validating tokens, because normal end users may not be able to reach that endpoint. This option is deprecated in favor of `www_authenticate_uri` and will be removed in the S release.

Warning: This option is deprecated for removal since Queens. Its value may be silently ignored in the future.

Reason The `auth_uri` option is deprecated in favor of `www_authenticate_uri` and will be removed in the S release.

`auth_version`

Type string

Default <None>

API version of the Identity API endpoint.

`interface`

Type string

Default internal

Interface to use for the Identity API endpoint. Valid values are public, internal (default) or admin.

`delay_auth_decision`

Type boolean

Default False

Do not handle authorization requests within the middleware, but delegate the authorization decision to downstream WSGI components.

`http_connect_timeout`

Type integer

Default <None>

Request timeout value for communicating with Identity API server.

`http_request_max_retries`

Type integer

Default 3

How many times are we trying to reconnect when communicating with Identity API Server.

`cache`

Type string

Default <None>

Request environment key where the Swift cache object is stored. When `auth_token` middleware is deployed with a Swift cache, use this option to have the middleware share a caching backend with swift. Otherwise, use the `memcached_servers` option instead.

certfile**Type** string**Default** <None>

Required if identity server requires client certificate

keyfile**Type** string**Default** <None>

Required if identity server requires client certificate

cafile**Type** string**Default** <None>

A PEM encoded Certificate Authority to use when verifying HTTPS connections. Defaults to system CAs.

insecure**Type** boolean**Default** False

Verify HTTPS connections.

region_name**Type** string**Default** <None>

The region in which the identity server can be found.

memcached_servers**Type** list**Default** <None>

Optionally specify a list of memcached server(s) to use for caching. If left undefined, tokens will instead be cached in-process.

Table 20: Deprecated Variations

Group	Name
keystone_auth_token	memcache_servers

token_cache_time**Type** integer**Default** 300

In order to prevent excessive effort spent validating tokens, the middleware caches previously-seen tokens for a configurable duration (in seconds). Set to -1 to disable caching completely.

memcache_security_strategy

Type string

Default None

Valid Values None, MAC, ENCRYPT

(Optional) If defined, indicate whether token data should be authenticated or authenticated and encrypted. If MAC, token data is authenticated (with HMAC) in the cache. If ENCRYPT, token data is encrypted and authenticated in the cache. If the value is not one of these options or empty, auth_token will raise an exception on initialization.

memcache_secret_key

Type string

Default <None>

(Optional, mandatory if memcache_security_strategy is defined) This string is used for key derivation.

memcache_pool_dead_retry

Type integer

Default 300

(Optional) Number of seconds memcached server is considered dead before it is tried again.

memcache_pool_maxsize

Type integer

Default 10

(Optional) Maximum total number of open connections to every memcached server.

memcache_pool_socket_timeout

Type integer

Default 3

(Optional) Socket timeout in seconds for communicating with a memcached server.

memcache_pool_unused_timeout

Type integer

Default 60

(Optional) Number of seconds a connection to memcached is held unused in the pool before it is closed.

memcache_pool_conn_get_timeout

Type integer

Default 10

(Optional) Number of seconds that an operation will wait to get a memcached client connection from the pool.

memcache_use_advanced_pool

Type boolean

Default True

(Optional) Use the advanced (eventlet safe) memcached client pool.

include_service_catalog

Type boolean

Default True

(Optional) Indicate whether to set the X-Service-Catalog header. If False, middleware will not ask for service catalog on token validation and will not set the X-Service-Catalog header.

enforce_token_bind

Type string

Default permissive

Used to control the use and type of token binding. Can be set to: disabled to not check token binding, permissive (default) to validate binding information if the bind type is of a form known to the server and ignore it if not. strict like permissive but if the bind type is unknown the token will be rejected. required any form of token binding is needed to be allowed. Finally the name of a binding method that must be present in tokens.

service_token_roles

Type list

Default ['service']

A choice of roles that must be present in a service token. Service tokens are allowed to request that an expired token can be used and so this check should tightly control that only actual services should be sending this token. Roles here are applied as an ANY check so any role in this list must be present. For backwards compatibility reasons this currently only affects the allow_expired check.

service_token_roles_required

Type boolean

Default False

For backwards compatibility reasons we must let valid service tokens pass that dont pass the service_token_roles check as valid. Setting this true will become the default in a future release and should be enabled if possible.

service_type

Type string

Default <None>

The name or type of the service as it appears in the service catalog. This is used to validate tokens that have restricted access rules.

auth_type

Type unknown type

Default <None>

Authentication type to load

Table 21: Deprecated Variations

Group	Name
keystone_authhtoken	auth_plugin

auth_section

Type unknown type

Default <None>

Config Section from which to load plugin specific options

mdns

registration_attempts

Type integer

Default 5

Minimum Value 1

Number of attempts to register a service. Currently has to be larger than 1 because of race conditions in the zeroconf library.

lookup_attempts

Type integer

Default 3

Minimum Value 1

Number of attempts to lookup a service.

params

Type unknown type

Default {}

Additional parameters to pass for the registered service.

interfaces

Type list

Default <None>

List of IP addresses of interfaces to use for mDNS. Defaults to all interfaces on the system.

oslo.messaging_amqp**container_name****Type** string**Default** <None>

Name for the AMQP container. must be globally unique. Defaults to a generated UUID

Table 22: Deprecated Variations

Group	Name
amqp1	container_name

idle_timeout**Type** integer**Default** 0

Timeout for inactive connections (in seconds)

Table 23: Deprecated Variations

Group	Name
amqp1	idle_timeout

trace**Type** boolean**Default** False

Debug: dump AMQP frames to stdout

Table 24: Deprecated Variations

Group	Name
amqp1	trace

ssl**Type** boolean**Default** False

Attempt to connect via SSL. If no other ssl-related parameters are given, it will use the systems CA-bundle to verify the servers certificate.

ssl_ca_file**Type** string**Default** ''

CA certificate PEM file used to verify the servers certificate

Table 25: Deprecated Variations

Group	Name
amqp1	ssl_ca_file

ssl_cert_file**Type** string**Default** ''

Self-identifying certificate PEM file for client authentication

Table 26: Deprecated Variations

Group	Name
amqp1	ssl_cert_file

ssl_key_file**Type** string**Default** ''

Private key PEM file used to sign ssl_cert_file certificate (optional)

Table 27: Deprecated Variations

Group	Name
amqp1	ssl_key_file

ssl_key_password**Type** string**Default** <None>

Password for decrypting ssl_key_file (if encrypted)

Table 28: Deprecated Variations

Group	Name
amqp1	ssl_key_password

ssl_verify_vhost**Type** boolean**Default** False

By default SSL checks that the name in the servers certificate matches the hostname in the transport_url. In some configurations it may be preferable to use the virtual hostname instead, for example if the server uses the Server Name Indication TLS extension (rfc6066) to provide a certificate per virtual host. Set ssl_verify_vhost to True if the servers SSL certificate uses the virtual host name instead of the DNS name.

sasl_mechanisms**Type** string

Default ''

Space separated list of acceptable SASL mechanisms

Table 29: Deprecated Variations

Group	Name
amqp1	sasl_mechanisms

sasl_config_dir**Type** string**Default ''**

Path to directory that contains the SASL configuration

Table 30: Deprecated Variations

Group	Name
amqp1	sasl_config_dir

sasl_config_name**Type** string**Default ''**

Name of configuration file (without .conf suffix)

Table 31: Deprecated Variations

Group	Name
amqp1	sasl_config_name

sasl_default_realm**Type** string**Default ''**

SASL realm to use if no realm present in username

connection_retry_interval**Type** integer**Default** 1**Minimum Value** 1

Seconds to pause before attempting to re-connect.

connection_retry_backoff**Type** integer**Default** 2**Minimum Value** 0

Increase the connection_retry_interval by this many seconds after each unsuccessful failover attempt.

connection_retry_interval_max

Type integer

Default 30

Minimum Value 1

Maximum limit for connection_retry_interval + connection_retry_backoff

link_retry_delay

Type integer

Default 10

Minimum Value 1

Time to pause between re-connecting an AMQP 1.0 link that failed due to a recoverable error.

default_reply_retry

Type integer

Default 0

Minimum Value -1

The maximum number of attempts to re-send a reply message which failed due to a recoverable error.

default_reply_timeout

Type integer

Default 30

Minimum Value 5

The deadline for an rpc reply message delivery.

default_send_timeout

Type integer

Default 30

Minimum Value 5

The deadline for an rpc cast or call message delivery. Only used when caller does not provide a timeout expiry.

default_notify_timeout

Type integer

Default 30

Minimum Value 5

The deadline for a sent notification message delivery. Only used when caller does not provide a timeout expiry.

default_sender_link_timeout

Type integer

Default 600

Minimum Value 1

The duration to schedule a purge of idle sender links. Detach link after expiry.

addressing_mode

Type string

Default dynamic

Indicates the addressing mode used by the driver. Permitted values: legacy - use legacy non-routable addressing routable - use routable addresses dynamic - use legacy addresses if the message bus does not support routing otherwise use routable addressing

pseudo_vhost

Type boolean

Default True

Enable virtual host support for those message buses that do not natively support virtual hosting (such as qpidd). When set to true the virtual host name will be added to all message bus addresses, effectively creating a private subnet per virtual host. Set to False if the message bus supports virtual hosting using the hostname field in the AMQP 1.0 Open performative as the name of the virtual host.

server_request_prefix

Type string

Default exclusive

address prefix used when sending to a specific server

Table 32: Deprecated Variations

Group	Name
amqp1	server_request_prefix

broadcast_prefix

Type string

Default broadcast

address prefix used when broadcasting to all servers

Table 33: Deprecated Variations

Group	Name
amqp1	broadcast_prefix

group_request_prefix

Type string

Default unicast

address prefix when sending to any server in group

Table 34: Deprecated Variations

Group	Name
amqp1	group_request_prefix

rpc_address_prefix

Type string

Default openstack.org/om/rpc

Address prefix for all generated RPC addresses

notify_address_prefix

Type string

Default openstack.org/om/notify

Address prefix for all generated Notification addresses

multicast_address

Type string

Default multicast

Appended to the address prefix when sending a fanout message. Used by the message bus to identify fanout messages.

unicast_address

Type string

Default unicast

Appended to the address prefix when sending to a particular RPC/Notification server. Used by the message bus to identify messages sent to a single destination.

anycast_address

Type string

Default anycast

Appended to the address prefix when sending to a group of consumers. Used by the message bus to identify messages that should be delivered in a round-robin fashion across consumers.

default_notification_exchange

Type string

Default <None>

Exchange name used in notification addresses. Exchange name resolution precedence: Target.exchange if set else default_notification_exchange if set else control_exchange if set else notify

default_rpc_exchange

Type string

Default <None>

Exchange name used in RPC addresses. Exchange name resolution precedence: Target.exchange if set else default_rpc_exchange if set else control_exchange if set else rpc

reply_link_credit

Type integer

Default 200

Minimum Value 1

Window size for incoming RPC Reply messages.

rpc_server_credit

Type integer

Default 100

Minimum Value 1

Window size for incoming RPC Request messages

notify_server_credit

Type integer

Default 100

Minimum Value 1

Window size for incoming Notification messages

pre_settled

Type multi-valued

Default rpc-cast

Default rpc-reply

Send messages of this type pre-settled. Pre-settled messages will not receive acknowledgement from the peer. Note well: pre-settled messages may be silently discarded if the delivery fails. Permitted values: rpc-call - send RPC Calls pre-settled rpc-reply- send RPC Replies pre-settled rpc-cast - Send RPC Casts pre-settled notify - Send Notifications pre-settled

oslo.messaging_kafka

kafka_max_fetch_bytes

Type integer

Default 1048576

Max fetch bytes of Kafka consumer

kafka_consumer_timeout

Type floating point

Default 1.0

Default timeout(s) for Kafka consumers

pool_size

Type integer

Default 10

Pool Size for Kafka Consumers

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason Driver no longer uses connection pool.

conn_pool_min_size

Type integer

Default 2

The pool size limit for connections expiration policy

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason Driver no longer uses connection pool.

conn_pool_ttl

Type integer

Default 1200

The time-to-live in sec of idle connections in the pool

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason Driver no longer uses connection pool.

consumer_group

Type string

Default oslo.messaging_consumer

Group id for Kafka consumer. Consumers in one group will coordinate message consumption

producer_batch_timeout

Type floating point

Default 0.0

Upper bound on the delay for KafkaProducer batching in seconds

producer_batch_size

Type integer

Default 16384

Size of batch for the producer async send

compression_codec

Type string

Default none

Valid Values none, gzip, snappy, lz4, zstd

The compression codec for all data generated by the producer. If not set, compression will not be used. Note that the allowed values of this depend on the kafka version

enable_auto_commit

Type boolean

Default False

Enable asynchronous consumer commits

max_poll_records

Type integer

Default 500

The maximum number of records returned in a poll call

security_protocol

Type string

Default PLAINTEXT

Valid Values PLAINTEXT, SASL_PLAINTEXT, SSL, SASL_SSL

Protocol used to communicate with brokers

sasl_mechanism

Type string

Default PLAIN

Mechanism when security protocol is SASL

ssl_cafile

Type string

Default ''

CA certificate PEM file used to verify the server certificate

ssl_client_cert_file

Type string

Default ''

Client certificate PEM file used for authentication.

ssl_client_key_file

Type string

Default ''

Client key PEM file used for authentication.

ssl_client_key_password

Type string

Default ''

Client key password file used for authentication.

oslo.messaging_notifications

driver

Type multi-valued

Default ''

The Drivers(s) to handle sending notifications. Possible values are messaging, messagingv2, routing, log, test, noop

Table 35: Deprecated Variations

Group	Name
DEFAULT	notification_driver

transport_url

Type string

Default <None>

A URL representing the messaging driver to use for notifications. If not set, we fall back to the same configuration used for RPC.

Table 36: Deprecated Variations

Group	Name
DEFAULT	notification_transport_url

topics

Type list

Default ['notifications']

AMQP topic used for OpenStack notifications.

Table 37: Deprecated Variations

Group	Name
rpc_notifier2	topics
DEFAULT	notification_topics

retry

Type integer

Default -1

The maximum number of attempts to re-send a notification message which failed to be delivered due to a recoverable error. 0 - No retry, -1 - indefinite

`oslo.messaging_rabbit`

`amqp_durable_queues`

Type boolean

Default False

Use durable queues in AMQP.

`amqp_auto_delete`

Type boolean

Default False

Auto-delete queues in AMQP.

Table 38: Deprecated Variations

Group	Name
DEFAULT	amqp_auto_delete

`ssl`

Type boolean

Default False

Connect over SSL.

Table 39: Deprecated Variations

Group	Name
oslo.messaging_rabbit	rabbit_use_ssl

`ssl_version`

Type string

Default ''

SSL version to use (valid only if SSL enabled). Valid values are TLSv1 and SSLv23. SSLv2, SSLv3, TLSv1_1, and TLSv1_2 may be available on some distributions.

Table 40: Deprecated Variations

Group	Name
oslo.messaging_rabbit	kombu_ssl_version

`ssl_key_file`

Type string

Default ''

SSL key file (valid only if SSL enabled).

Table 41: Deprecated Variations

Group	Name
oslo.messaging.rabbit	kombu_ssl_keyfile

ssl_cert_file

Type string

Default ''

SSL cert file (valid only if SSL enabled).

Table 42: Deprecated Variations

Group	Name
oslo.messaging.rabbit	kombu_ssl_certfile

ssl_ca_file

Type string

Default ''

SSL certification authority file (valid only if SSL enabled).

Table 43: Deprecated Variations

Group	Name
oslo.messaging.rabbit	kombu_ssl_ca_certs

heartbeat_in_pthread

Type boolean

Default True

Run the health check heartbeat thread through a native python thread by default. If this option is equal to False then the health check heartbeat will inherit the execution model from the parent process. For example if the parent process has monkey patched the stdlib by using eventlet/greenlet then the heartbeat will be run through a green thread.

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

kombu_reconnect_delay

Type floating point

Default 1.0

How long to wait before reconnecting in response to an AMQP consumer cancel notification.

Table 44: Deprecated Variations

Group	Name
DEFAULT	kombu_reconnect_delay

kombu_compression**Type** string**Default** <None>

EXPERIMENTAL: Possible values are: gzip, bz2. If not set compression will not be used. This option may not be available in future versions.

kombu_missing_consumer_retry_timeout**Type** integer**Default** 60

How long to wait a missing client before abandoning to send it its replies. This value should not be longer than rpc_response_timeout.

Table 45: Deprecated Variations

Group	Name
oslo.messaging.rabbit	kombu_reconnect_timeout

kombu_failover_strategy**Type** string**Default** round-robin**Valid Values** round-robin, shuffle

Determines how the next RabbitMQ node is chosen in case the one we are currently connected to becomes unavailable. Takes effect only if more than one RabbitMQ node is provided in config.

rabbit_login_method**Type** string**Default** AMQPLAIN**Valid Values** PLAIN, AMQPLAIN, RABBIT-CR-DEMO

The RabbitMQ login method.

Table 46: Deprecated Variations

Group	Name
DEFAULT	rabbit_login_method

rabbit_retry_interval**Type** integer**Default** 1

How frequently to retry connecting with RabbitMQ.

rabbit_retry_backoff

Type integer

Default 2

How long to backoff for between retries when connecting to RabbitMQ.

Table 47: Deprecated Variations

Group	Name
DEFAULT	rabbit_retry_backoff

rabbit_interval_max

Type integer

Default 30

Maximum interval of RabbitMQ connection retries. Default is 30 seconds.

rabbit_ha_queues

Type boolean

Default False

Try to use HA queues in RabbitMQ (x-ha-policy: all). If you change this option, you must wipe the RabbitMQ database. In RabbitMQ 3.0, queue mirroring is no longer controlled by the x-ha-policy argument when declaring a queue. If you just want to make sure that all queues (except those with auto-generated names) are mirrored across all nodes, run: rabbitmqctl set_policy HA ^(?!amq).}* {ha-mode: all}

Table 48: Deprecated Variations

Group	Name
DEFAULT	rabbit_ha_queues

rabbit_transient_queues_ttl

Type integer

Default 1800

Minimum Value 1

Positive integer representing duration in seconds for queue TTL (x-expires). Queues which are unused for the duration of the TTL are automatically deleted. The parameter affects only reply and fanout queues.

rabbit_qos_prefetch_count

Type integer

Default 0

Specifies the number of messages to prefetch. Setting to zero allows unlimited messages.

heartbeat_timeout_threshold

Type integer

Default 60

Number of seconds after which the Rabbit broker is considered down if heartbeats keep-alive fails (0 disables heartbeat).

heartbeat_rate

Type integer

Default 2

How often times during the heartbeat_timeout_threshold we check the heartbeat.

direct_mandatory_flag

Type boolean

Default True

(DEPRECATED) Enable/Disable the RabbitMQ mandatory flag for direct send. The direct send is used as reply, so the MessageUndeliverable exception is raised in case the client queue does not exist. MessageUndeliverable exception will be used to loop for a timeout to let a chance to sender to recover. This flag is deprecated and it will not be possible to deactivate this functionality anymore

Warning: This option is deprecated for removal. Its value may be silently ignored in the future.

Reason Mandatory flag no longer deactivatable.

enable_cancel_on_failover

Type boolean

Default False

Enable x-cancel-on-ha-failover flag so that rabbitmq server will cancel and notify consumers when queue is down

oslo_policy**enforce_scope**

Type boolean

Default False

This option controls whether or not to enforce scope when evaluating policies. If **True**, the scope of the token used in the request is compared to the `scope_types` of the policy being enforced. If the scopes do not match, an `InvalidScope` exception will be raised. If **False**, a message will be logged informing operators that policies are being invoked with mismatching scope.

enforce_new_defaults

Type boolean

Default False

This option controls whether or not to use old deprecated defaults when evaluating policies. If **True**, the old deprecated defaults are not going to be evaluated. This means if any existing token is

allowed for old defaults but is disallowed for new defaults, it will be disallowed. It is encouraged to enable this flag along with the `enforce_scope` flag so that you can get the benefits of new defaults and `scope_type` together

policy_file

Type string

Default `policy.yaml`

The relative or absolute path of a file that maps roles to permissions for a given service. Relative paths must be specified in relation to the configuration file setting this option.

Table 49: Deprecated Variations

Group	Name
DEFAULT	<code>policy_file</code>

policy_default_rule

Type string

Default `default`

Default rule. Enforced when a requested rule is not found.

Table 50: Deprecated Variations

Group	Name
DEFAULT	<code>policy_default_rule</code>

policy_dirs

Type multi-valued

Default `policy.d`

Directories where policy configuration files are stored. They can be relative to any directory in the search path defined by the `config_dir` option, or absolute paths. The file defined by `policy_file` must exist for these directories to be searched. Missing or empty directories are ignored.

Table 51: Deprecated Variations

Group	Name
DEFAULT	<code>policy_dirs</code>

remote_content_type

Type string

Default `application/x-www-form-urlencoded`

Valid Values `application/x-www-form-urlencoded`, `application/json`

Content Type to send and receive data for REST based policy check

remote_ssl_verify_server_crt

Type boolean

Default `False`

server identity verification for REST based policy check

remote_ssl_ca_crt_file

Type string

Default <None>

Absolute path to ca cert file for REST based policy check

remote_ssl_client_crt_file

Type string

Default <None>

Absolute path to client cert for REST based policy check

remote_ssl_client_key_file

Type string

Default <None>

Absolute path client key file REST based policy check

pci_devices

alias

Type multi-valued

Default ''

An alias for PCI device identified by vendor_id and product_id fields. Format: {vendor_id: 1234, product_id: 5678, name: pci_dev1}

port_physnet

cidr_map

Type list

Default 10.10.10.0/24:physnet_a,2001:db8::/64:physnet_b

This option has a sample default set, which means that its actual default value may vary from the one documented above.

Mapping of IP subnet CIDR to physical network. When the physnet_cidr_map processing hook is enabled the physical_network property of baremetal ports is populated based on this mapping.

processing

add_ports

Type string

Default pxe

Valid Values all, active, pxe, disabled

Which MAC addresses to add as ports during introspection. Possible values: all (all MAC addresses), active (MAC addresses of NIC with IP addresses), pxe (only MAC address of NIC node PXE booted from, falls back to active if PXE MAC is not supplied by the ramdisk).

keep_ports

Type string

Default all

Valid Values all, present, added

Which ports (already present on a node) to keep after introspection. Possible values: all (do not delete anything), present (keep ports which MACs were present in introspection data), added (keep only MACs that we added during introspection).

overwrite_existing

Type boolean

Default True

Whether to overwrite existing values in node database. Disable this option to make introspection a non-destructive operation.

default_processing_hooks

Type string

Default ramdisk_error,root_disk_selection,scheduler,
validate_interfaces,capabilities,pci_devices

Comma-separated list of default hooks for processing pipeline. Hook scheduler updates the node with the minimum properties required by the Nova scheduler. Hook validate_interfaces ensures that valid NIC data was provided by the ramdisk. Do not exclude these two unless you really know what you're doing.

processing_hooks

Type string

Default \$default_processing_hooks

Comma-separated list of enabled hooks for processing pipeline. The default for this is \$default_processing_hooks, hooks can be added before or after the defaults like this: prehook,\$default_processing_hooks,posthook.

ramdisk_logs_dir

Type string

Default <None>

If set, logs from ramdisk will be stored in this directory.

always_store_ramdisk_logs**Type** boolean**Default** False

Whether to store ramdisk logs even if it did not return an error message (dependent upon ramdisk_logs_dir option being set).

node_not_found_hook**Type** string**Default** <None>

The name of the hook to run when inspector receives inspection information from a node it isn't already aware of. This hook is ignored by default.

store_data**Type** string**Default** none

The storage backend for storing introspection data. Possible values are: none, database and swift. If set to none, introspection data will not be stored.

disk_partitioning_spacing**Type** boolean**Default** True

Whether to leave 1 GiB of disk size untouched for partitioning. Only has effect when used with the IPA as a ramdisk, for older ramdisk local_gb is calculated on the ramdisk side.

ramdisk_logs_filename_format**Type** string**Default** {uuid}_{dt:%Y%m%d-%H%M%S.%f}.tar.gz

File name template for storing ramdisk logs. The following replacements can be used: {uuid} - node UUID or unknown, {bmc} - node BMC address or unknown, {dt} - current UTC date and time, {mac} - PXE booting MAC or unknown.

power_off**Type** boolean**Default** True

Whether to power off a node after introspection. Nodes in active or rescue states which submit introspection data will be left on if the feature is enabled via the permit_active_introspection configuration option.

permit_active_introspection**Type** boolean**Default** False

Whether to process nodes that are in running states.

update_pxe_enabled

Type boolean

Default True

Whether to update the pxe_enabled value according to the introspection data. This option has no effect if [processing]overwrite_existing is set to False

pxe_filter

driver

Type string

Default iptables

PXE boot filter driver to use, possible filters are: iptables, dnsmasq and noop. Set noop to disable the firewall filtering.

sync_period

Type integer

Default 15

Minimum Value 0

Amount of time in seconds, after which repeat periodic update of the filter.

deny_unknown_macs

Type boolean

Default False

By default inspector will open the DHCP server for any node when introspection is active. Opening DHCP for unknown MAC addresses when introspection is active allow for users to add nodes with no ports to ironic and have ironic-inspector enroll ports based on node introspection results. NOTE: If this option is True, nodes must have at least one enrolled port prior to introspection.

service_catalog

auth_url

Type unknown type

Default <None>

Authentication URL

auth_type

Type unknown type

Default <None>

Authentication type to load

Table 52: Deprecated Variations

Group	Name
service_catalog	auth_plugin

caf file

Type string

Default <None>

PEM encoded Certificate Authority to use when verifying HTTPs connections.

certfile

Type string

Default <None>

PEM encoded client certificate cert file

collect_timing

Type boolean

Default False

Collect per-API call timing information.

connect_retries

Type integer

Default <None>

The maximum number of retries that should be attempted for connection errors.

connect_retry_delay

Type floating point

Default <None>

Delay (in seconds) between two retries for connection errors. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

default_domain_id

Type unknown type

Default <None>

Optional domain ID to use with v3 and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

default_domain_name

Type unknown type

Default <None>

Optional domain name to use with v3 API and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

domain_id

Type unknown type

Default <None>

Domain ID to scope to

domain_name

Type unknown type

Default <None>

Domain name to scope to

endpoint_override

Type string

Default <None>

Always use this endpoint URL for requests for this client. NOTE: The unversioned endpoint should be specified here; to request a particular API version, use the *version*, *min-version*, and/or *max-version* options.

insecure

Type boolean

Default False

Verify HTTPS connections.

keyfile

Type string

Default <None>

PEM encoded client certificate key file

max_version

Type string

Default <None>

The maximum major version of a given API, intended to be used as the upper bound of a range with min_version. Mutually exclusive with version.

min_version

Type string

Default <None>

The minimum major version of a given API, intended to be used as the lower bound of a range with max_version. Mutually exclusive with version. If min_version is given with no max_version it is as if max version is latest.

password

Type unknown type

Default <None>

Users password

project_domain_id

Type unknown type

Default <None>

Domain ID containing project

project_domain_name

Type unknown type

Default <None>

Domain name containing project

project_id

Type unknown type

Default <None>

Project ID to scope to

Table 53: Deprecated Variations

Group	Name
service_catalog	tenant-id
service_catalog	tenant_id

project_name

Type unknown type

Default <None>

Project name to scope to

Table 54: Deprecated Variations

Group	Name
service_catalog	tenant-name
service_catalog	tenant_name

region_name

Type string

Default <None>

The default region_name for endpoint URL discovery.

service_name

Type string

Default <None>

The default service_name for endpoint URL discovery.

service_type

Type string

Default baremetal-introspection

The default service_type for endpoint URL discovery.

split_loggers

Type boolean

Default False

Log requests to multiple loggers.

status_code_retries

Type integer

Default <None>

The maximum number of retries that should be attempted for retriable HTTP status codes.

status_code_retry_delay

Type floating point

Default <None>

Delay (in seconds) between two retries for retriable status codes. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

system_scope

Type unknown type

Default <None>

Scope for system operations

tenant_id

Type unknown type

Default <None>

Tenant ID

tenant_name

Type unknown type

Default <None>

Tenant Name

timeout

Type integer

Default <None>

Timeout value for http requests

trust_id

Type unknown type

Default <None>

Trust ID

user_domain_id

Type unknown type

Default <None>

Users domain id

user_domain_name

Type unknown type

Default <None>

Users domain name

user_id

Type unknown type

Default <None>

User id

username

Type unknown type

Default <None>

Username

Table 55: Deprecated Variations

Group	Name
service_catalog	user-name
service_catalog	user_name

valid_interfaces

Type list

Default ['internal', 'public']

List of interfaces, in order of preference, for endpoint URL.

version

Type string

Default <None>

Minimum Major API version within a given Major API version for endpoint URL discovery. Mutually exclusive with min_version and max_version

ssl

ca_file

Type string

Default <None>

CA certificate file to use to verify connecting clients.

Table 56: Deprecated Variations

Group	Name
DEFAULT	ssl_ca_file

cert_file

Type string

Default <None>

Certificate file to use when starting the server securely.

Table 57: Deprecated Variations

Group	Name
DEFAULT	ssl_cert_file

key_file

Type string

Default <None>

Private key file to use when starting the server securely.

Table 58: Deprecated Variations

Group	Name
DEFAULT	ssl_key_file

version

Type string

Default <None>

SSL version to use (valid only if SSL enabled). Valid values are TLSv1 and SSLv23. SSLv2, SSLv3, TLSv1_1, and TLSv1_2 may be available on some distributions.

ciphers

Type string

Default <None>

Sets the list of available ciphers. value should be a string in the OpenSSL cipher list format.

swift

auth_url

Type unknown type

Default <None>

Authentication URL

auth_type

Type unknown type

Default <None>

Authentication type to load

Table 59: Deprecated Variations

Group	Name
swift	auth_plugin

cafile

Type string

Default <None>

PEM encoded Certificate Authority to use when verifying HTTPs connections.

certfile

Type string

Default <None>

PEM encoded client certificate cert file

collect_timing

Type boolean

Default False

Collect per-API call timing information.

connect_retries

Type integer

Default <None>

The maximum number of retries that should be attempted for connection errors.

connect_retry_delay

Type floating point

Default <None>

Delay (in seconds) between two retries for connection errors. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

container

Type string

Default ironic-inspector

Default Swift container to use when creating objects.

default_domain_id

Type unknown type

Default <None>

Optional domain ID to use with v3 and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

default_domain_name

Type unknown type

Default <None>

Optional domain name to use with v3 API and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

delete_after

Type integer

Default 0

Number of seconds that the Swift object will last before being deleted. (set to 0 to never delete the object).

domain_id

Type unknown type

Default <None>

Domain ID to scope to

domain_name

Type unknown type

Default <None>

Domain name to scope to

endpoint_override

Type string

Default <None>

Always use this endpoint URL for requests for this client. NOTE: The unversioned endpoint should be specified here; to request a particular API version, use the *version*, *min-version*, and/or *max-version* options.

insecure

Type boolean

Default False

Verify HTTPS connections.

keyfile

Type string

Default <None>

PEM encoded client certificate key file

max_version

Type string

Default <None>

The maximum major version of a given API, intended to be used as the upper bound of a range with *min_version*. Mutually exclusive with *version*.

min_version**Type** string**Default** <None>

The minimum major version of a given API, intended to be used as the lower bound of a range with max_version. Mutually exclusive with version. If min_version is given with no max_version it is as if max version is latest.

password**Type** unknown type**Default** <None>

Users password

project_domain_id**Type** unknown type**Default** <None>

Domain ID containing project

project_domain_name**Type** unknown type**Default** <None>

Domain name containing project

project_id**Type** unknown type**Default** <None>

Project ID to scope to

Table 60: Deprecated Variations

Group	Name
swift	tenant-id
swift	tenant_id

project_name**Type** unknown type**Default** <None>

Project name to scope to

Table 61: Deprecated Variations

Group	Name
swift	tenant-name
swift	tenant_name

region_name

Type string

Default <None>

The default region_name for endpoint URL discovery.

service_name

Type string

Default <None>

The default service_name for endpoint URL discovery.

service_type

Type string

Default object-store

The default service_type for endpoint URL discovery.

split_loggers

Type boolean

Default False

Log requests to multiple loggers.

status_code_retries

Type integer

Default <None>

The maximum number of retries that should be attempted for retriable HTTP status codes.

status_code_retry_delay

Type floating point

Default <None>

Delay (in seconds) between two retries for retriable status codes. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

system_scope

Type unknown type

Default <None>

Scope for system operations

tenant_id

Type unknown type

Default <None>

Tenant ID

tenant_name

Type unknown type

Default <None>

Tenant Name

timeout

Type integer

Default <None>

Timeout value for http requests

trust_id

Type unknown type

Default <None>

Trust ID

user_domain_id

Type unknown type

Default <None>

Users domain id

user_domain_name

Type unknown type

Default <None>

Users domain name

user_id

Type unknown type

Default <None>

User id

username

Type unknown type

Default <None>

Username

Table 62: Deprecated Variations

Group	Name
swift	user-name
swift	user_name

valid_interfaces

Type list

Default ['internal', 'public']

List of interfaces, in order of preference, for endpoint URL.

version

Type string

Default <None>

Minimum Major API version within a given Major API version for endpoint URL discovery. Mutually exclusive with min_version and max_version

3.3.2 Policies

Warning: JSON formatted policy files were deprecated in the Wallaby development cycle due to the Victoria deprecation by the `oslo.policy` library. Use the `oslopolicy-convert-json-to-yaml` tool to convert the existing JSON to YAML formatted policy file in backward compatible way.

The following is an overview of all available policies in **ironic inspector**. For a sample configuration file, refer to *Ironic Inspector Policy*.

ironic_inspector.api

is_admin

Default role:admin or role:administrator or role:baremetal_admin

Full read/write API access

is_observer

Default role:baremetal_observer

Read-only API access

public_api

Default is_public_api:True

Internal flag for public API routes

default

Default !

Default API access policy

introspection

Default rule:public_api

Operations

- GET /

Access the API root for available versions information

introspection:version

Default rule:public_api

Operations

- GET /{version}

Access the versioned API root for version information

introspection:continue

Default rule:public_api

Operations

- **POST** /continue

Ramdisk callback to continue introspection

introspection:status

Default role:reader and system_scope:all

Operations

- **GET** /introspection
- **GET** /introspection/{node_id}

Get introspection status

introspection:start

Default role:admin and system_scope:all

Operations

- **POST** /introspection/{node_id}

Start introspection

introspection:abort

Default role:admin and system_scope:all

Operations

- **POST** /introspection/{node_id}/abort

Abort introspection

introspection:data

Default role:admin and system_scope:all

Operations

- **GET** /introspection/{node_id}/data

Get introspection data

introspection:reapply

Default role:admin and system_scope:all

Operations

- **POST** /introspection/{node_id}/data/unprocessed

Reapply introspection on stored data

introspection:rule:get

Default role:admin and system_scope:all

Operations

- **GET** /rules
- **GET** /rules/{rule_id}

Get introspection rule(s)

introspection:rule:delete

Default role:admin and system_scope:all

Operations

- **DELETE** /rules
- **DELETE** /rules/{rule_id}

Delete introspection rule(s)

introspection:rule:create

Default role:admin and system_scope:all

Operations

- **POST** /rules

Create introspection rule

3.4 User Guide

3.4.1 How Ironic Inspector Works

How Ironic Inspector Works

Workflow

Usual hardware introspection flow is as follows:

- Operator enrolls nodes into [Ironic](#) e.g. via [baremetal CLI](#) command. Power management credentials should be provided to Ironic at this step.
- Nodes are put in the correct state for introspection as described in [node states](#).
- Operator sends nodes on introspection using [ironic-inspector](#) API or CLI (see [usage](#)).
- On receiving node UUID **ironic-inspector**:
 - validates node power credentials, current power and provisioning states,
 - allows access to PXE boot service for the nodes,
 - issues reboot command for the nodes, so that they boot the ramdisk.
- The ramdisk collects the required information and posts it back to **ironic-inspector**.
- On receiving data from the ramdisk, **ironic-inspector**:
 - validates received data,
 - finds the node in Ironic database using its BMC address (MAC address in case of SSH driver),

- fills missing node properties with received data and creates missing ports.

Note: **ironic-inspector** is responsible to create Ironic ports for some or all NICs found on the node. **ironic-inspector** is also capable of deleting ports that should not be present. There are two important configuration options that affect this behavior: `add_ports` and `keep_ports` (please refer to *the sample configuration file* for a detailed explanation).

Default values as of **ironic-inspector** 1.1.0 are `add_ports=pxe`, `keep_ports=all`, which means that only one port will be added, which is associated with NIC the ramdisk PXE booted from. No ports will be deleted. This setting ensures that deploying on introspected nodes will succeed despite [Ironic bug 1405131](#).

Ironic inspection feature by default requires different settings: `add_ports=all`, `keep_ports=present`, which means that ports will be created for all detected NICs, and all other ports will be deleted. Refer to the [Ironic inspection documentation](#) for details.


Ironic inspector can also be configured to not create any ports. This is done by setting `add_ports=disabled`. If setting `add_ports` to disabled the `keep_ports` option should be also set to `all`. This will ensure no manually added ports will be deleted.

- Separate API (see [usage](#) and [API reference](#)) can be used to query introspection results for a given node.
- Nodes are put in the correct state for deploying as described in [node states](#).

Starting DHCP server and configuring PXE boot environment is not part of this package and should be done separately.

State machine diagram

The diagram below shows the introspection states that an **ironic-inspector** FSM goes through during the node introspection, discovery and reprocessing. The diagram also shows events that trigger state transitions.

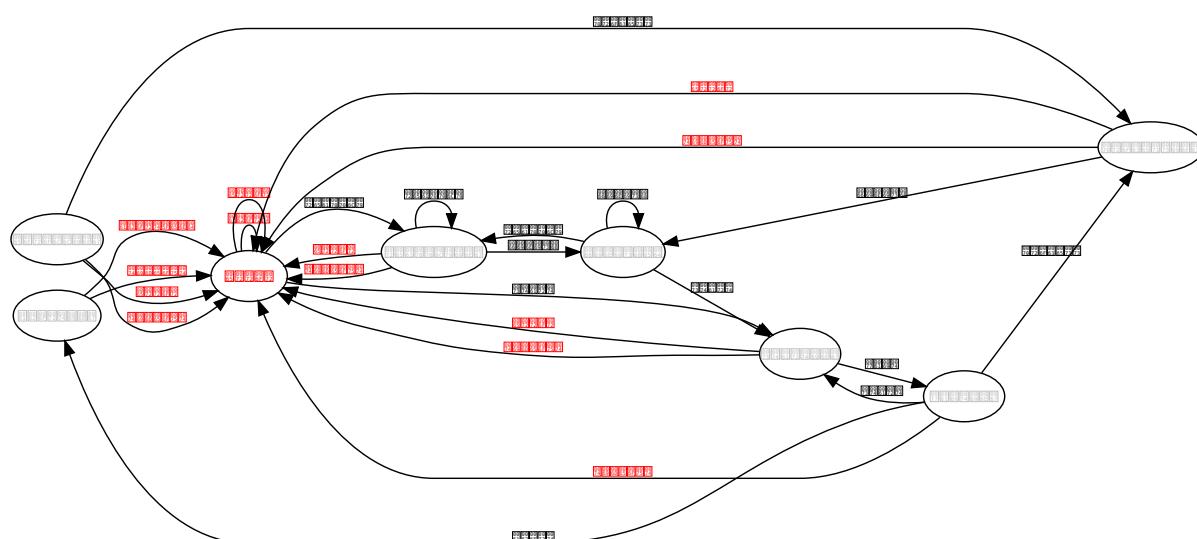

3.4.2 How to use Ironic Inspector

Usage

Refer to the [API reference](#) for information on the HTTP API. Refer to the [client documentation](#) for information on how to use CLI and Python library.

Using from Ironic API

Ironic Kilo introduced support for hardware introspection under name of inspection. **ironic-inspector** introspection is supported for some generic drivers, please refer to [Ironic inspection documentation](#) for details.

Node States

- The nodes should be moved to **MANAGEABLE** provision state before introspection (requires *python-ironicclient* of version 0.5.0 or newer):

```
baremetal node manage <node>
```

- The introspection can be triggered by using the following command:

```
baremetal node inspect <node>
```

- After successful introspection and before deploying nodes should be made available to Nova, by moving them to **AVAILABLE** state:

```
baremetal node provide <node>
```

Note: Due to how Nova interacts with Ironic driver, you should wait 1 minute before Nova becomes aware of available nodes after issuing this command. Use `nova hypervisor-stats` command output to check it.

Introspection Rules

Inspector supports a simple JSON-based DSL to define rules to run during introspection. Inspector provides an API to manage such rules, and will run them automatically after running all processing hooks.

A rule consists of conditions to check, and actions to run. If conditions evaluate to true on the introspection data, then actions are run on a node.

Please refer to the command below to import introspection rule:

```
baremetal introspection rule import <json file>
```

Available conditions and actions are defined by plugins, and can be extended, see [How To Contribute](#) for details. See the [API reference](#) for specific calls to define introspection rules.

Conditions

A condition is represented by an object with fields:

op the type of comparison operation, default available operators include:

- eq, le, ge, ne, lt, gt - basic comparison operators;
- in-net - checks that an IP address is in a given network;
- matches - requires a full match against a given regular expression;
- contains - requires a value to contain a given regular expression;
- is-empty - checks that field is an empty string, list, dict or None value.

field a JSON path to the field in the introspection data to use in comparison.

Starting with the Mitaka release, you can also apply conditions to ironic node field. Prefix field with schema (data:// or node://) to distinguish between values from introspection data and node. Both schemes use JSON path:

```
{"field": "node://property.path", "op": "eq", "value": "val"}  
{"field": "data://introspection.path", "op": "eq", "value": "val"}
```

if scheme (node or data) is missing, condition compares data with introspection data.

invert boolean value, whether to invert the result of the comparison.

multiple how to treat situations where the `field` query returns multiple results (e.g. the field contains a list), available options are:

- any (the default) require any to match,
- all require all to match,
- first require the first to match.

All other fields are passed to the condition plugin, e.g. numeric comparison operations require a `value` field to compare against.

Scope

By default, introspection rules are applied to all nodes being inspected. In order for the rule to be applied only to specific nodes, a matching scope variable must be set to both the rule and the node. To set the scope for a rule include field "scope" in JSON file before importing. For example:

```
cat <json file>
{
    "description": "...",
    "actions": [...],
    "conditions": [...],
    "scope": "SCOPE"
}
```

Set the property `inspection_scope` on the node you want the rule to be applied to:

```
baremetal node set --property inspection_scope="SCOPE" <node>
```

Now, when inspecting, the rule will be applied only to nodes with matching scope value. It will also ignore nodes that do not have `inspection_scope` property set. Note that if a rule has no scope set, it will be applied to all nodes, regardless if they have `inspection_scope` set or not.

Actions

An action is represented by an object with fields:

`action` type of action. Possible values are defined by plugins.

All other fields are passed to the action plugin.

Default available actions include:

- `fail` fail introspection. Requires a `message` parameter for the failure message.
- `set-attribute` sets an attribute on an Ironic node. Requires a `path` field, which is the path to the attribute as used by ironic (e.g. `/properties/something`), and a `value` to set.
- `set-capability` sets a capability on an Ironic node. Requires `name` and `value` fields, which are the name and the value for a new capability accordingly. Existing value for this same capability is replaced.
- `extend-attribute` the same as `set-attribute`, but treats existing value as a list and appends value to it. If optional `unique` parameter is set to True, nothing will be added if given value is already in a list.
- `add-trait` adds a trait to an Ironic node. Requires a `name` field with the name of the trait to add.
- `remove-trait` removes a trait from an Ironic node. Requires a `name` field with the name of the trait to remove.

Starting from Mitaka release, `value` field in actions supports fetching data from introspection, using python string formatting notation:

```
{"action": "set-attribute", "path": "/driver_info/ipmi_address",
"value": "{data[inventory][bmc_address]}"}
```

Note that any value referenced in this way will be converted to a string.

If `value` is a dict or list, strings nested at any level within the structure will be formatted as well:

```
{"action": "set-attribute", "path": "/properties/root_device",
"value": {"serial": "{data[root_device][serial]}"}}
```

Plugins

ironic-inspector heavily relies on plugins for data processing. Even the standard functionality is largely based on plugins. Set `processing_hooks` option in the configuration file to change the set of plugins to be run on introspection data. Note that order **does** matter in this option, especially for hooks that have dependencies on other hooks.

These are plugins that are enabled by default and should not be disabled, unless you understand what you're doing:

scheduler validates and updates basic hardware scheduling properties: CPU number and architecture, memory and disk size.

Note: Diskless nodes have the disk size property `local_gb == 0`. Always use node driver `root_device` hints to prevent unexpected HW failures passing silently.

validate_interfaces validates network interfaces information. Creates new ports, optionally deletes ports that were not present in the introspection data. Also sets the `pxe_enabled` flag for the PXE-booting port and unsets it for all the other ports to avoid **nova** picking a random port to boot the node.

Note: When the `pxe_filter` is configured to only open the DHCP server for known MAC addresses, i.e the `[pxe_filter]deny_unknown_macs` configuration option is enabled, it is not possible to rely on the `validate_interfaces` processing plug-in to create the PXE-booting port in ironic. Nodes must have at least one enrolled port prior to introspection in this case.

The following plugins are enabled by default, but can be disabled if not needed:

ramdisk_error reports error, if `error` field is set by the ramdisk, also optionally stores logs from `logs` field, see the [API reference](#) for details.

capabilities detect node capabilities: CPU, boot mode, etc. See [Capabilities Detection](#) for more details.

pci_devices gathers the list of all PCI devices returned by the ramdisk and compares to those defined in `alias` field(s) from `pci_devices` section of configuration file. The recognized PCI devices and their count are then stored in node properties. This information can be later used in nova flavors for node scheduling.

Here are some plugins that can be additionally enabled:

example example plugin logging its input and output.

raid_device gathers block devices from ramdisk and exposes root device in multiple runs.

extra_hardware stores the value of the data key returned by the ramdisk as a JSON encoded string in a Swift object. The plugin will also attempt to convert the data into a format usable by introspection rules. If this is successful then the new format will be stored in the extra key. The data key is then deleted from the introspection data, as unless converted its assumed unusable by introspection rules.

lldp_basic Processes LLDP data returned from inspection, parses TLVs from the Basic Management (802.1AB), 802.1Q, and 802.3 sets and stores the processed data back in the Ironic inspector

database. To enable LLDP in the inventory from IPA, `ipa-collect-lldp=1` should be passed as a kernel parameter to the IPA ramdisk.

local_link_connection Processes LLDP data returned from inspection, specifically looking for the port ID and chassis ID. If found, it configures the local link connection information on the Ironic ports with that data. To enable LLDP in the inventory from IPA, `ipa-collect-lldp=1` should be passed as a kernel parameter to the IPA ramdisk. In order to avoid processing the raw LLDP data twice, the `lldp_basic` plugin should also be installed and run prior to this plugin.

physnet_cidr_map Configures the `physical_network` property of the nodes Ironic port when the IP address is in a configured CIDR mapping. CIDR to physical network mappings is set in configuration using the `[port_physnet]/cidr_map` option, for example:

```
[port_physnet]
cidr_map = 10.10.10.0/24:physnet_a, 2001:db8::/64:physnet_b
```

accelerators Processes PCI data returned from inspection and compares with the accelerator inventory, it will update accelerator device information to the properties field of the ironic node if any accelerator device is found, for example:

```
{'local_gb': '1115', 'cpus': '40', 'cpu_arch': 'x86_64', 'memory_mb':
    ↪ '32768',
  'capabilities': 'boot_mode:bios,cpu_vt:true,cpu_aes:true,cpu_
    ↪ hugepages:true,cpu_hugepages_1g:true,cpu_txt:true',
  'accel': [{{
    'vendor_id': '10de',
    'device_id': '1eb8',
    'type': 'GPU',
    'pci_address': '0000:82:00.0',
    'device_info': 'NVIDIA Corporation Tesla T4'}}
}]]
```

Refer to [How To Contribute](#) for information on how to write your own plugin.

Discovery

Starting from Mitaka, **ironic-inspector** is able to register new nodes in Ironic.

The existing `node-not-found-hook` handles what happens if **ironic-inspector** receives inspection data from a node it can not identify. This can happen if a node is manually booted without registering it with Ironic first.

For discovery, the configuration file option `node_not_found_hook` should be set to load the hook called `enroll`. This hook will enroll the unidentified node into Ironic using the `fake-hardware` hardware type. This is a configurable option: set `enroll_node_driver` in the **ironic-inspector** configuration file to the hardware type you want. You can also configure arbitrary fields to set on discovery, for example:

```
[discovery]
enroll_node_driver = ipmi
enroll_node_fields = management_interface noop,resource_class:baremetal
```

The `enroll` hook will also set the `ipmi_address` property on the new node, if its available in the introspection data we received, see [ramdisk callback](#).

Once the `enroll` hook is finished, **ironic-inspector** will process the introspection data in the same way it would for an identified node. It runs the processing `plugins`, and after that it runs introspection rules, which would allow for more customisable node configuration, see [rules](#).

A rule to set a nodes Ironic driver to ipmi and populate the required `driver_info` for that driver would look like:

```
[{
    "description": "Set IPMI driver_info if no credentials",
    "actions": [
        {"action": "set-attribute", "path": "driver", "value": "ipmi"},
        {"action": "set-attribute", "path": "driver_info/ipmi_username",
         "value": "username"},
        {"action": "set-attribute", "path": "driver_info/ipmi_password",
         "value": "password"}
    ],
    "conditions": [
        {"op": "is-empty", "field": "node://driver_info.ipmi_password"},
        {"op": "is-empty", "field": "node://driver_info.ipmi_username"}
    ]
}, {
    "description": "Set deploy info if not already set on node",
    "actions": [
        {"action": "set-attribute", "path": "driver_info/deploy_kernel",
         "value": "<glance uuid>"},
        {"action": "set-attribute", "path": "driver_info/deploy_ramdisk",
         "value": "<glance uuid>"}
    ],
    "conditions": [
        {"op": "is-empty", "field": "node://driver_info.deploy_ramdisk"},
        {"op": "is-empty", "field": "node://driver_info.deploy_kernel"}
    ]
}]
```

All nodes discovered and enrolled via the `enroll` hook, will contain an `auto_discovered` flag in the introspection data, this flag makes it possible to distinguish between manually enrolled nodes and auto-discovered nodes in the introspection rules using the rule condition `eq`:

```
{
    "description": "Enroll auto-discovered nodes with ipmi hardware type",
    "actions": [
        {"action": "set-attribute", "path": "driver", "value": "ipmi"}
    ],
    "conditions": [
        {"op": "eq", "field": "data://auto_discovered", "value": true}
    ]
}
```

Reapplying introspection on stored data

To allow correcting mistakes in introspection rules the API provides an entry point that triggers the introspection over stored data. The data to use for processing is kept in Swift separately from the data already processed. Reapplying introspection overwrites processed data in the store. Updating the introspection data through the endpoint isn't supported yet. Following preconditions are checked before reapplying introspection:

- no data is being sent along with the request
- Swift store is configured and enabled
- introspection data is stored in Swift for the node UUID
- node record is kept in database for the UUID
- introspection is not ongoing for the node UUID

Should the preconditions fail an immediate response is given to the user:

- **400** if the request contained data or in case Swift store is not enabled in configuration
- **404** in case Ironic doesn't keep track of the node UUID
- **409** if an introspection is already ongoing for the node

If the preconditions are met a background task is executed to carry out the processing and a **202 Accepted** response is returned to the endpoint user. As requested, these steps are performed in the background task:

- preprocessing hooks
- post processing hooks, storing result in Swift
- introspection rules

These steps are avoided, based on the feature requirements:

- `node_not_found_hook` is skipped
- power operations
- roll-back actions done by hooks

Limitations:

- there's no way to update the unprocessed data atm.
- the unprocessed data is never cleaned from the store
- check for stored data presence is performed in background; missing data situation still results in a **202** response

Capabilities Detection

Starting with the Newton release, **Ironic Inspector** can optionally discover several node capabilities. A recent (Newton or newer) IPA image is required for it to work.

Boot mode

The current boot mode (BIOS or UEFI) can be detected and recorded as `boot_mode` capability in Ironic. It will make some drivers to change their behaviour to account for this capability. Set the `[capabilities]boot_mode` configuration option to True to enable.

CPU capabilities

Several CPU flags are detected by default and recorded as following capabilities:

- `cpu_aes` AES instructions.
- `cpu_vt` virtualization support.
- `cpu_ttx` TXT support.
- `cpu_hugepages` huge pages (2 MiB) support.
- `cpu_hugepages_1g` huge pages (1 GiB) support.

It is possible to define your own rules for detecting CPU capabilities. Set the `[capabilities]cpu_flags` configuration option to a mapping between a CPU flag and a capability, for example:

```
cpu_flags = aes:cpu_aes,svm:cpu_vt,vmx:cpu_vt
```

See the default value of this option for a more detail example.

InfiniBand support

Starting with the Ocata release, **Ironic Inspector** supports detection of InfiniBand network interfaces. A recent (Ocata or newer) IPA image is required for that to work. When an InfiniBand network interface is discovered, the **Ironic Inspector** adds a `client_id` attribute to the `extra` attribute in the ironic port. The **Ironic Inspector** should be configured with `iptables.ethoib_interfaces` to indicate the Ethernet Over InfiniBand (EoIB) which are used for physical access to the DHCP network. For example if **Ironic Inspector** DHCP server is using `br-inspector` and the `br-inspector` has EoIB port e.g. `eth0`, the `iptables.ethoib_interfaces` should be set to `eth0`. The `iptables.ethoib_interfaces` allows to map the baremetal GUID to its EoIB MAC based on the `neighs` files. This is needed for blocking DHCP traffic of the nodes (MACs) which are not part of the introspection.

The format of the `/sys/class/net/<ethoib>/eth/neighs` file:

```
# EMAC=<ether net mac of the ethoib> IMAC=<qp number:lid:GUID>
# For example:
IMAC=97:fe:80:00:00:00:00:00:7c:fe:90:03:00:29:26:52
qp number=97:fe
```

(continues on next page)

(continued from previous page)

```
lid=80:00:00:00:00:00:00  
GUID=7c:fe:90:03:00:29:26:52
```

Example of content:

```
EMAC=02:00:02:97:00:01 IMAC=97:fe:80:00:00:00:00:00:7c:fe:90:03:00:29:26:52  
EMAC=02:00:00:61:00:02 IMAC=61:fe:80:00:00:00:00:00:7c:fe:90:03:00:29:24:4f
```

3.4.3 HTTP API Reference

- Bare Metal Introspection API Reference.

3.4.4 Troubleshooting

Troubleshooting

Errors when starting introspection

- *Invalid provision state available*

In Kilo release with *python-ironicclient* 0.5.0 or newer Ironic defaults to reporting provision state AVAILABLE for newly enrolled nodes. **ironic-inspector** will refuse to conduct introspection in this state, as such nodes are supposed to be used by Nova for scheduling. See *node states* for instructions on how to put nodes into the correct state.

Introspection times out

There may be 3 reasons why introspection can time out after some time (defaulting to 60 minutes, altered by `timeout` configuration option):

1. Fatal failure in processing chain before node was found in the local cache. See *Troubleshooting data processing* for the hints.
2. Failure to load the ramdisk on the target node. See *Troubleshooting PXE boot* for the hints.
3. Failure during ramdisk run. See *Troubleshooting ramdisk run* for the hints.

Troubleshooting data processing

In this case **ironic-inspector** logs should give a good idea what went wrong. E.g. for RDO or Fedora the following command will output the full log:

```
sudo journalctl -u openstack-ironic-inspector
```

(use `openstack-ironic-discoverd` for version < 2.0.0).

Note: Service name and specific command might be different for other Linux distributions (and for old version of **ironic-inspector**).

If `ramdisk_error` plugin is enabled and `ramdisk_logs_dir` configuration option is set, **ironic-inspector** will store logs received from the ramdisk to the `ramdisk_logs_dir` directory. This depends, however, on the ramdisk implementation.

A local cache miss during data processing would leave a message like:

```
ERROR ironic_python_agent.inspector [-] inspectorerror 400: {"error": {"message": "The following failures happened during running pre-processing hooks:\nLook up error: Could not find a node for attributes {'bmc_address': u'10.x.y.z', 'mac': [u'00:aa:bb:cc:dd:ee', u'00:aa:bb:cc:dd:ef']}"}}
```

One potential explanation for such an error is a misconfiguration in the BMC where a channel with the wrong IP address is active (and hence detected and reported back by the Ironic Python Agent), but can then not be matched to the IP address Ironic has in its cache for this node.

Troubleshooting PXE boot

PXE booting most often becomes a problem for bare metal environments with several physical networks. If the hardware vendor provides a remote console (e.g. iDRAC for DELL), use it to connect to the machine and see what is going on. You may need to restart introspection.

Another source of information is DHCP and TFTP server logs. Their location depends on how the servers were installed and run. For RDO or Fedora use:

```
$ sudo journalctl -u openstack-ironic-inspector-dnsmasq
```

(use `openstack-ironic-discoverd-dnsmasq` for version < 2.0.0).

The last resort is `tcpdump` utility. Use something like

```
$ sudo tcpdump -i any port 67 or port 68 or port 69
```

to watch both DHCP and TFTP traffic going through your machine. Replace `any` with a specific network interface to check that DHCP and TFTP requests really reach it.

If you see node not attempting PXE boot or attempting PXE boot on the wrong network, reboot the machine into BIOS settings and make sure that only one relevant NIC is allowed to PXE boot.

If you see node attempting PXE boot using the correct NIC but failing, make sure that:

1. network switches configuration does not prevent PXE boot requests from propagating,
2. there is no additional firewall rules preventing access to port 67 on the machine where *ironic-inspector* and its DHCP server are installed.

If you see node receiving DHCP address and then failing to get kernel and/or ramdisk or to boot them, make sure that:

1. TFTP server is running and accessible (use `tftp` utility to verify),
2. no firewall rules prevent access to TFTP port,

3. SELinux is configured properly to allow external TFTP access,

If SELinux is neither permissive nor disabled, you should config `tftp_home_dir` in SELinux by executing the command

```
$ sudo setsebool -P tftp_home_dir 1
```

See [the man page](#) for more details.

4. DHCP server is correctly set to point to the TFTP server,
5. `pxelinux.cfg/default` within TFTP root contains correct reference to the kernel and ramdisk.

Note: If using iPXE instead of PXE, check the HTTP server logs and the iPXE configuration instead.

Troubleshooting ramdisk run

First, check if the ramdisk logs were stored locally as described in the [Troubleshooting data processing](#) section. If not, ensure that the ramdisk actually booted as described in the [Troubleshooting PXE boot](#) section.

Finally, you can try connecting to the IPA ramdisk. If you have any remote console access to the machine, you can check the logs as they appear on the screen. Otherwise, you can rebuild the IPA image with your SSH key to be able to log into it. Use the `dynamic-login` or `devuser` element for a DIB-based build or put an `authorized_keys` file in `/usr/share/oem/` for a CoreOS-based one.

Troubleshooting DNS issues on Ubuntu

Ubuntu uses local DNS caching, so tries localhost for DNS results first before calling out to an external DNS server. When DNSmasq is installed and configured for use with ironic-inspector, it can cause problems by interfering with the local DNS cache. To fix this issue ensure that `/etc/resolv.conf` points to your external DNS servers and not to `127.0.0.1`.

On Ubuntu 14.04 this can be done by editing your `/etc/resolvconf/resolv.conf.d/head` and adding your nameservers there. This will ensure they will come up first when `/etc/resolv.conf` is regenerated.

Running Inspector in a VirtualBox environment

By default VirtualBox does not expose a DMI table to the guest. This prevents ironic-inspector from being able to discover the properties of the a node. In order to run ironic-inspector on a VirtualBox guest the host must be configured to expose DMI data inside the guest. To do this run the following command on the VirtualBox host:

```
VBoxManage setextradata {NodeName} "VBoxInternal/Devices/pcbios/0/Config/  
→DmiExposeMemoryTable" 1
```

Note: Replace *{NodeName}* with the name of the guest you wish to expose the DMI table on. This command will need to be run once per host to enable this functionality.

HTTP API

See <https://docs.openstack.org/api-ref/baremetal-introspection/>

3.5 Administrator Guide

3.5.1 How to upgrade Ironic Inspector

Upgrade Guide

The [release notes](#) should always be read carefully when upgrading the ironic-inspector service. Starting with the Mitaka series, specific upgrade steps and considerations are well-documented in the release notes.

Upgrades are only supported one series at a time, or within a series. Only offline (with downtime) upgrades are currently supported.

When upgrading ironic-inspector, the following steps should always be taken:

- Update ironic-inspector code, without restarting the service yet.
- Stop the ironic-inspector service.
- Run database migrations:

```
ironic-inspector-dbsync --config-file <PATH-TO-INSPECTOR.CONF> upgrade
```

- Start the ironic-inspector service.
- Upgrade the ironic-python-agent image used for introspection.

Note: There is no implicit upgrade order between ironic and ironic-inspector, unless the [release notes](#) say otherwise.

Migrating introspection data

Starting with Stein release, ironic-inspector supports two introspection data storage backends: `swift` and `database`. If you decide to change the backend, you can use the provided command to migrate the data:

```
ironic-inspector-migrate-data --from swift --to database --config-file /etc/ironic-inspector/inspector.conf
```

Note: Configuration for **both** backends is expected to be present in the configuration file for this command to succeed.

3.5.2 Dnsmasq PXE filter driver

dnsmasq PXE filter

An inspection PXE DHCP stack is often implemented by the **dnsmasq** service. The **dnsmasq** PXE filter implementation relies on directly configuring the **dnsmasq** DHCP service to provide a caching PXE traffic filter of node MAC addresses.

How it works

The filter works by populating the **dnsmasq** DHCP hosts directory with a configuration file per MAC address. Each file is either enabling or disabling, thru the `ignore` directive, the DHCP service for a particular MAC address:

```
$ cat /etc/dnsmasq.d/de-ad-be-ef-de-ad
de:ad:be:ef:de:ad,ignore
$
```

The filename is used to keep track of all MAC addresses in the cache, avoiding file parsing. The content of the file determines the MAC address access policy.

Thanks to the `inotify` facility, **dnsmasq** is notified once a new file is *created* or an existing file is *modified* in the DHCP hosts directory. Thus, to allow a MAC address, the filter removes the `ignore` directive:

```
$ cat /etc/dnsmasq.d/de-ad-be-ef-de-ad
de:ad:be:ef:de:ad
$
```

The hosts directory content establishes a *cached* MAC addresses filter that is kept synchronized with the **ironic** port list.

Note: The **dnsmasq** inotify facility implementation doesn't react to a file being removed or truncated.

Configuration

The `inotify` facility was [introduced](#) to **dnsmasq** in the version 2.73. This filter driver has been checked by **ironic-inspector** CI with **dnsmasq** versions ≥ 2.76 .

To enable the **dnsmasq** PXE filter, update the PXE filter driver name in the **ironic-inspector** configuration file:

```
[pxe_filter]
driver = dnsmasq
```

The DHCP hosts directory can be specified to override the default `/var/lib/ironic-inspector/dhcp-hostsdir`:

```
[dnsmasq_pxe_filter]
dhcp_hostsdir = /etc/ironic-inspector/dhcp-hostsdir
```

The filter design relies on the hosts directory being in exclusive **ironic-inspector** control. The hosts directory should be considered a *private cache* directory of **ironic-inspector** that **dnsmasq** polls configuration updates from, through the **inotify** facility. The directory has to be writable by **ironic-inspector** and readable by **dnsmasq**.

It is also possible to override the default (empty) **dnsmasq** start and stop commands to, for instance, directly control the **dnsmasq** service:

```
[dnsmasq_pxe_filter]
dnsmasq_start_command = dnsmasq --conf-file /etc/ironic-inspector/dnsmasq.conf
dnsmasq_stop_command = kill $(cat /var/run/dnsmasq.pid)
```

Note: The commands support shell expansion. The default empty start command means the **dnsmasq** service wont be started upon the filter initialization. Conversely, the default empty stop command means the service wont be stopped upon an (error) exit.

Note: These commands are executed through the `rootwrap` facility, so overriding may require a filter file to be created in the `rootwrap.d` directory. A sample configuration to use with the `systemctl` facility might be:

```
sudo cat > /etc/ironic-inspector/rootwrap.d/ironic-inspector-dnsmasq-
↳systemctl.filters <<EOF
[Filters]
# ironic_inspector/pxe_filter/dnsmasq.py
systemctl: CommandFilter, systemctl, root, restart, dnsmasq
systemctl: CommandFilter, systemctl, root, stop, dnsmasq
EOF
```

Caveats

The initial synchronization will put some load on the **dnsmasq** service starting based on the amount of ports **ironic** keeps. The start-up can take up to a minute of full CPU load for huge amounts of MACs (tens of thousands). Subsequent filter synchronizations will only cause the **dnsmasq** to parse the modified files. Typically those are the bare metal nodes being added or phased out from the compute service, meaning dozens of file updates per sync call.

The **ironic-inspector** takes over the control of the DHCP hosts directory to implement its filter cache. Files are generated dynamically so should not be edited by hand. To minimize the interference between the deployment and introspection, **ironic-inspector** has to start the **dnsmasq** service only after the initial synchronization. Conversely, the **dnsmasq** service is stopped upon (unexpected) **ironic-inspector** exit.

To avoid accumulating stale DHCP host files over time, the driver cleans up the DHCP hosts directory before the initial synchronization during the start-up.

Although the filter driver tries its best to always stop the **dnsmasq** service, it is recommended that the operator configures the **dnsmasq** service in such a way that it terminates upon **ironic-inspector** (unexpected) exit to prevent a stale deny list from being used by the **dnsmasq** service.

CONTRIBUTOR DOCS

4.1 How To Contribute

4.1.1 Basics

- Our source code is hosted on [OpenStack GitHub](#), but please do not send pull requests there.
- Please follow usual OpenStack [Gerrit Workflow](#) to submit a patch.
- Update change log in README.rst on any significant change.
- It goes without saying that any code change should be accompanied by unit tests.
- Note the branch you're proposing changes to. `master` is the current focus of development, use `stable/VERSION` for proposing an urgent fix, where `VERSION` is the current stable series. E.g. at the moment of writing the stable branch is `stable/1.0`.
- Please file an RFE in [StoryBoard](#) for any significant code change and a regular story for any significant bug fix.

4.1.2 Development Environment

First of all, install `tox` utility. It's likely to be in your distribution repositories under name of `python-tox`. Alternatively, you can install it from PyPI.

Next checkout and create environments:

```
git clone https://github.com/openstack/ironic-inspector.git
cd ironic-inspector
tox
```

Repeat `tox` command each time you need to run tests. If you don't have Python interpreter of one of supported versions (currently 3.6 and 3.7), use `-e` flag to select only some environments, e.g.

```
tox -e py36
```

Note: This command also runs tests for database migrations. By default the sqlite backend is used. For testing with mysql or postgresql, you need to set up a db named `openstack_citest` with user `openstack_citest` and password `openstack_citest` on localhost. Use the script `tools/test_setup.sh` to set the database up the same way as done in the OpenStack CI environment.

Note: Users of Fedora <= 23 will need to run sudo dnf releasever=24 update python-virtualenv to run unit tests

To run the functional tests, use:

```
tox -e func
```

Once you have added new state or transition into inspection state machine, you should regenerate *State machine diagram* with:

```
tox -e genstates
```

Run the service with:

```
.tox/py36/bin/ironic-inspector --config-file example.conf
```

Of course you may have to modify `example.conf` to match your OpenStack environment. See the [install guide](#) for information on generating or downloading an example configuration file.

You can develop and test **ironic-inspector** using DevStack - see [Deploying Ironic Inspector with DevStack](#) for the current status.

4.1.3 Deploying Ironic Inspector with DevStack

DevStack provides a way to quickly build a full OpenStack development environment with requested components. There is a plugin for installing **ironic-inspector** in DevStack. Installing **ironic-inspector** requires a machine running Ubuntu 14.04 (or later) or Fedora 23 (or later). Make sure this machine is fully up to date and has the latest packages installed before beginning this process.

Download DevStack:

```
git clone https://git.openstack.org/openstack-dev/devstack.git  
cd devstack
```

Create `local.conf` file with minimal settings required to enable both the **ironic** and the **ironic-inspector**. You can start with the [Example local.conf](#) and extend it as needed.

Example local.conf

```
[[local|localrc]]  
# Credentials  
ADMIN_PASSWORD=password  
DATABASE_PASSWORD=password  
RABBIT_PASSWORD=password  
SERVICE_PASSWORD=password  
SERVICE_TOKEN=password  
SWIFT_HASH=password  
SWIFT_TEMPURL_KEY=password
```

(continues on next page)

(continued from previous page)

```
# Enable Ironic plugin
enable_plugin ironic https://opendev.org/openstack/ironic
enable_plugin ironic-inspector https://opendev.org/openstack/ironic-inspector

# Disable nova novnc service, ironic does not support it anyway.
disable_service n-novnc

# Enable Swift for the direct deploy interface.
enable_service s-proxy
enable_service s-object
enable_service s-container
enable_service s-account

# Disable Horizon
disable_service horizon

# Disable Cinder
disable_service cinder c-sch c-api c-vol

# Swift temp URL's are required for the direct deploy interface
SWIFT_ENABLE_TEMPURLS=True

# Create 3 virtual machines to pose as Ironic's baremetal nodes.
IRONIC_VM_COUNT=3
IRONIC_BAREMETAL_BASIC_OPS=True
DEFAULT_INSTANCE_TYPE=baremetal

# Enable additional hardware types, if needed.
#IRONIC_ENABLED_HARDWARE_TYPES=ipmi,fake-hardware
# Don't forget that many hardware types require enabling of additional
# interfaces, most often power and management:
#IRONIC_ENABLED_MANAGEMENT_INTERFACES=ipmitool,fake
#IRONIC_ENABLED_POWER_INTERFACES=ipmitool,fake
# The 'ipmi' hardware type's default deploy interface is 'iscsi'.
# This would change the default to 'direct':
#IRONIC_DEFAULT_DEPLOY_INTERFACE=direct

# Enable inspection via ironic-inspector
IRONIC_ENABLED_INSPECT_INTERFACES=inspector,no-inspect
# Make it the default for all hardware types:
IRONIC_DEFAULT_INSPECT_INTERFACE=inspector

# Change this to alter the default driver for nodes created by devstack.
# This driver should be in the enabled list above.
IRONIC_DEPLOY_DRIVER=ipmi

# The parameters below represent the minimum possible values to create
# functional nodes.
IRONIC_VM_SPECS_RAM=2048
```

(continues on next page)

(continued from previous page)

```
IRONIC_VM_SPECS_DISK=10

# Size of the ephemeral partition in GB. Use 0 for no ephemeral partition.
IRONIC_VM_EPHEMERAL_DISK=0

# To build your own IPA ramdisk from source, set this to True
IRONIC_BUILD_DEPLOY_RAMDISK=False
IRONIC_INSPECTOR_BUILD_RAMDISK=False
VIRT_DRIVER=ironic

# By default, DevStack creates a 10.0.0.0/24 network for instances.
# If this overlaps with the hosts network, you may adjust with the
# following.
NETWORK_GATEWAY=10.1.0.1
FIXED_RANGE=10.1.0.0/24
FIXED_NETWORK_SIZE=256

# Log all output to files
LOGFILE=/opt/stack/devstack.log
LOGDIR=/opt/stack/logs
IRONIC_VM_LOG_DIR=/opt/stack/ironic-bm-logs
```

Notes

- Set IRONIC_INSPECTOR_BUILD_RAMDISK to True if you want to build ramdisk. Default value is False and ramdisk will be downloaded instead of building.
- 1024 MiB of RAM is a minimum required for the default build of IPA based on CoreOS. If you plan to use another operating system and build IPA with diskimage-builder 2048 MiB is recommended.
- Network configuration is pretty sensitive, better not to touch it without deep understanding.
- This configuration disables **horizon**, **heat**, **cinder** and **tempest**, adjust it if you need these services.

Start the install:

```
./stack.sh
```

Usage

After installation is complete, you can source `openrc` in your shell, and then use the OpenStack CLI to manage your DevStack:

```
source openrc admin demo
```

Show DevStack screens:

```
screen -x stack
```

To exit screen, hit `CTRL-a d`.

List baremetal nodes:

```
baremetal node list
```

Bring the node to manageable state:

```
baremetal node manage <NodeID>
```

Inspect the node:

```
baremetal node inspect <NodeID>
```

Note: The deploy driver used must support the inspect interface. See also the [Ironic Python Agent](#).

A node can also be inspected using the following command. However, this will not affect the provision state of the node:

```
baremetal introspection start <NodeID>
```

Check inspection status:

```
baremetal introspection status <NodeID>
```

Optionally, get the inspection data:

```
baremetal introspection data save <NodeID>
```

4.1.4 Writing a Plugin

- **ironic-inspector** allows you to hook code into the data processing chain after introspection. Inherit `ProcessingHook` class defined in `ironic_inspector.plugins.base module` and overwrite any or both of the following methods:

`before_processing(introspection_data, **)` called before any data processing, providing the raw data. Each plugin in the chain can modify the data, so order in which plugins are loaded matters here. Returns nothing.

`before_update(introspection_data, node_info, **)` called after node is found and ports are created, but before data is updated on a node. Please refer to the docstring for details and examples.

You can optionally define the following attribute:

`dependencies` a list of entry point names of the hooks this hook depends on. These hooks are expected to be enabled before the current hook.

Make your plugin a setuptools entry point under `ironic_inspector.hooks.processing` namespace and enable it in the configuration file (`processing.processing_hooks` option).

- **ironic-inspector** allows plugins to override the action when node is not found in node cache. Write a callable with the following signature:

`(introspection_data, **)` called when node is not found in cache, providing the processed data. Should return a `NodeInfo` class instance.

Make your plugin a setuptools entry point under `ironic_inspector.hooks.node_not_found` namespace and enable it in the configuration file (`processing.node_not_found_hook` option).

- **ironic-inspector** allows more condition types to be added for *Introspection Rules*. Inherit `RuleConditionPlugin` class defined in `ironic_inspector.plugins.base module` and overwrite at least the following method:

check(node_info, field, params, **) called to check that condition holds for a given field.
Field value is provided as `field` argument, `params` is a dictionary defined at the time of condition creation. Returns boolean value.

The following methods and attributes may also be overridden:

validate(params, **) called to validate parameters provided during condition creating. Default implementation requires keys listed in `REQUIRED_PARAMS` (and only them).

`REQUIRED_PARAMS` contains set of required parameters used in the default implementation of `validate` method, defaults to `value` parameter.

`ALLOW_NONE` if its set to `True`, missing fields will be passed as `None` values instead of failing the condition. Defaults to `False`.

Make your plugin a setuptools entry point under `ironic_inspector.rules.conditions` namespace.

- **ironic-inspector** allows more action types to be added for *Introspection Rules*. Inherit `RuleActionPlugin` class defined in `ironic_inspector.plugins.base module` and overwrite at least the following method:

apply(node_info, params, **) called to apply the action.

The following methods and attributes may also be overridden:

validate(params, **) called to validate parameters provided during actions creating. Default implementation requires keys listed in `REQUIRED_PARAMS` (and only them).

`REQUIRED_PARAMS` contains set of required parameters used in the default implementation of `validate` method, defaults to no parameters.

Make your plugin a setuptools entry point under `ironic_inspector.rules.conditions` namespace.

Note: `**` argument is needed so that we can add optional arguments without breaking out-of-tree plugins. Please make sure to include and ignore it.

4.1.5 Making changes to the database

In order to make a change to the ironic-inspector database you must update the database models found in `ironic_inspector.db module` and then create a migration to reflect that change.

There are two ways to create a migration which are described below, both of these generate a new migration file. In this file there is only one function:

- **upgrade - The function to run when `ironic-inspector-dbsync upgrade` is run,** and should be populated with code to bring the database up to its new state from the state it was in after the last migration.

For further information on creating a migration, refer to [Create a Migration Script](#) from the alembic documentation.

Autogenerate

This is the simplest way to create a migration. Alembic will compare the models to an up to date database, and then attempt to write a migration based on the differences. This should generate correct migrations in most cases however there are some cases when it can not detect some changes and may require manual modification, see [What does Autogenerate Detect \(and what does it not detect?\)](#) from the alembic documentation.

```
ironic-inspector-dbsync upgrade  
ironic-inspector-dbsync revision -m "A short description" --autogenerate
```

Manual

This will generate an empty migration file, with the correct revision information already included. However the upgrade function is left empty and must be manually populated in order to perform the correct actions on the database:

```
ironic-inspector-dbsync revision -m "A short description"
```

4.1.6 Implementing PXE Filter Drivers

Background

inspector in-band introspection PXE-boots the Ironic Python Agent live image, to inspect the baremetal server. **ironic** also PXE-boots IPA to perform tasks on a node, such as deploying an image. **ironic** uses **neutron** to provide DHCP, however **neutron** does not provide DHCP for unknown MAC addresses so **inspector** has to use its own DHCP/TFTP stack for discovery and inspection.

When **ironic** and **inspector** are operating in the same L2 network, there is a potential for the two DHCPs to race, which could result in a node being deployed by **ironic** being PXE booted by **inspector**.

To prevent DHCP races between the **inspector** DHCP and **ironic** DHCP, **inspector** has to be able to filter which nodes can get a DHCP lease from the **inspector** DHCP server. These filters can then be used to prevent nodes enrolled in **ironic** inventory from being PXE-booted unless they are explicitly moved into the **inspected** state.

Filter Interface

The contract between **inspector** and a PXE filter driver is described in the *FilterDriver* interface. The methods a driver has to implement are:

- `init_filter()` called on the service start to initialize internal driver state
- `sync()` called both periodically and when a node starts or finishes introspection to allow or deny its ports MAC addresses in the driver
- `tear_down_filter()` called on service exit to reset the internal driver state

The driver-specific configuration is suggested to be parsed during instantiation. There's also a convenience generic interface implementation [BaseFilter](#) that provides base locking and initialization implementation. If required, a driver can opt-out from the periodic synchronization by overriding the `get_periodic_sync_task()`.

4.1.7 Python API

[ironic_inspector](#)

[ironic_inspector package](#)

Subpackages

[ironic_inspector.cmd package](#)

Submodules

[ironic_inspector.cmd.all module](#)

The Ironic Inspector service.

```
ironic_inspector.cmd.all.main(args=['-b', 'latex', 'doc/source', 'doc/build/pdf'])
```

[ironic_inspector.cmd.conductor module](#)

The Ironic Inspector Conductor service.

```
ironic_inspector.cmd.conductor.main(args=['-b', 'latex', 'doc/source', 'doc/build/pdf'])
```

[ironic_inspector.cmd.dbsync module](#)

```
ironic_inspector.cmd.dbsync.add_alembic_command(subparsers, name)
```

```
ironic_inspector.cmd.dbsync.add_command_parsers(subparsers)
```

```
ironic_inspector.cmd.dbsync.do_alembic_command(config, cmd, *args, **kwargs)
```

```
ironic_inspector.cmd.dbsync.do_revision(config, cmd, *args, **kwargs)
```

```
ironic_inspector.cmd.dbsync.main(args=['-b', 'latex', 'doc/source', 'doc/build/pdf'])
```

```
ironic_inspector.cmd.dbsync.with_revision(config, cmd, *args, **kwargs)
```

ironic_inspector.cmd.migration module

Migrate introspected data between Swift and database.

```
class ironic_inspector.cmd.migration.MigrationTool
```

Bases: object

```
    main()
```

```
ironic_inspector.cmd.migration.main()
```

ironic_inspector.cmd.status module

```
class ironic_inspector.cmd.status.Checks
```

Bases: oslo_upgradecheck.upgradecheck.UpgradeCommands

Upgrade checks for the ironic-status upgrade check command

Upgrade checks should be added as separate methods in this class and added to _upgrade_checks tuple.

```
ironic_inspector.cmd.status.main()
```

ironic_inspector.cmd.wsgi module

WSGI script for Ironic Inspector API, installed by pbr.

```
ironic_inspector.cmd.wsgi.initialize_wsgi_app()
```

Module contents

ironic_inspector.common package

Submodules

ironic_inspector.common.context module

```
class ironic_inspector.common.context.RequestContext(is_public_api=False, **kwargs)
```

Bases: oslo_context.context.RequestContext

Extends security contexts from the oslo.context library.

```
classmethod from_dict(values, **kwargs)
```

Construct a context object from a provided dictionary.

```
classmethod from_environ(environ, **kwargs)
```

Load a context object from a request environment.

If keyword arguments are provided then they override the values in the request environment.

Parameters `environ` (`dict`) The environment dictionary associated with a request.

to_policy_values()

A dictionary of context attributes to enforce policy with.

oslo.policy enforcement requires a dictionary of attributes representing the current logged in user on which it applies policy enforcement. This dictionary defines a standard list of attributes that should be available for enforcement across services.

It is expected that services will often have to override this method with either deprecated values or additional attributes used by that service specific policy.

ironic_inspector.common.coordination module

class ironic_inspector.common.coordination.Coordinator(*prefix=None*)

Bases: object

Tooz coordination wrapper.

get_lock(*uuid*)

Get lock for node uuid.

get_members()

Get members in the service group.

group_name = b'ironic_inspector.service_group'

join_group()

Join service group.

leave_group()

Leave service group

lock_prefix = 'ironic_inspector.'

run_elect_coordinator()

Trigger a new leader election.

start(*heartbeat=True*)

Start coordinator.

Parameters heartbeat Whether spawns a new thread to keep heartbeating with the tooz backend. Unless there is periodic task to do heartbeat manually, it should be always set to True.

stop()

Disconnect from coordination backend and stop heartbeat.

ironic_inspector.common.coordination.get_coordinator(*prefix=None*)

ironic_inspector.common.ironic module

exception `ironic_inspector.common.ironic.NotFound(node_ident, code=404, *args, **kwargs)`

Bases: `ironic_inspector.utils.Error`

Node not found in Ironic.

`ironic_inspector.common.ironic.call_with_retries(func, *args, **kwargs)`

Call an ironic client function retrying all errors.

If an ironic client exception is raised, try calling the func again, at most 5 times, waiting 1 sec between each call. If on the 5th attempt the func raises again, the exception is propagated to the caller.

`ironic_inspector.common.ironic.capabilities_to_dict(caps)`

Convert the Nodes capabilities into a dictionary.

`ironic_inspector.common.ironic.check_provision_state(node)`

Sanity checks the provision state of the node.

Parameters `node` An API client returned node object describing the baremetal node according to ironics node data model.

Returns None if no action is to be taken, True if the power node state should not be modified.

Raises Error on an invalid state being detected.

`ironic_inspector.common.ironic.dict_to_capabilities(caps_dict)`

Convert a dictionary into a string with the capabilities syntax.

`ironic_inspector.common.ironic.get_client(token=None)`

Get an ironic client connection.

`ironic_inspector.common.ironic.get_ipmi_address(node)`

Get the BMC address defined in node.driver_info dictionary

Possible names of BMC address value examined in order of list [ipmi_address] + CONF.ipmi_address_fields. The value could be an IP address or a hostname. DNS lookup performed for the first non empty value.

The first valid BMC address value returned along with its v4 and v6 IP addresses.

Parameters `node` Node object with defined driver_info dictionary

Returns tuple (ipmi_address, ipv4_address, ipv6_address)

`ironic_inspector.common.ironic.get_node(node_id, ironic=None, **kwargs)`

Get a node from Ironic.

Parameters

- `node_id` node UUID or name.
- `ironic` ironic client instance.
- `kwargs` arguments to pass to Ironic client.

Raises Error on failure

```
ironic_inspector.common.ironic.lookup_node(macs=None, bmc_addresses=None,  
                                         introspection_data=None, ironic=None)
```

Lookup a node in the ironic database.

```
ironic_inspector.common.ironic.lookup_node_by_bmc_addresses(addresses, introspec-  
                                         tion_data=None,  
                                         ironic=None,  
                                         fail=False)
```

Find a node by its BMC address.

```
ironic_inspector.common.ironic.lookup_node_by_macs(macs, introspection_data=None,  
                                                 ironic=None, fail=False)
```

Find a node by its MACs.

```
ironic_inspector.common.ironic.reset_ironic_session()
```

Reset the global session variable.

Mostly useful for unit tests.

ironic_inspector.common.keystone module

```
ironic_inspector.common.keystone.add_auth_options(options, service_type)
```

```
ironic_inspector.common.keystone.get_adapter(group, **adapter_kwargs)
```

```
ironic_inspector.common.keystone.get_endpoint(group, **kwargs)
```

```
ironic_inspector.common.keystone.get_session(group)
```

```
ironic_inspector.common.keystone.register_auth_opts(group, service_type)
```

ironic_inspector.common.lldp_parsers module

Names and mapping functions used to map LLDP TLVs to name/value pairs

```
class ironic_inspector.common.lldp_parsers.LLDPBasicMgmtParser(nv=None)
```

Bases: *ironic_inspector.common.lldp_parsers.LLDPParser*

Class to handle parsing of 802.1AB Basic Management set

This class will also handle 802.1Q and 802.3 OUI TLVs.

```
add_capabilities(struct, name, data)
```

Handle LLDP_TLV_SYS_CAPABILITIES

```
add_mgmt_address(struct, name, data)
```

Handle LLDP_TLV_MGMT_ADDRESS

There can be multiple Mgmt Address TLVs, store in list.

```
handle_org_specific_tlv(struct, name, data)
```

Handle Organizationally Unique ID TLVs

This class supports 802.1Q and 802.3 OUI TLVs.

See <http://www.ieee802.org/1/pages/802.1Q-2014.html>, Annex D and <http://standards.ieee.org/about/get/802/802.3.html>

```
class ironic_inspector.common.lldp_parsers.LLDPParser(node_info, nv=None)
```

Bases: object

Base class to handle parsing of LLDP TLVs

Each class that inherits from this base class must provide a parser map. Parser maps are used to associate a LLDP TLV with a function handler and arguments necessary to parse the TLV and generate one or more name/value pairs. Each LLDP TLV maps to a tuple with the following fields:

function - handler function to generate name/value pairs

construct - name of construct definition for TLV

name - user-friendly name of TLV. For TLVs that generate only one name/value pair this is the name used

len_check - boolean indicating if length check should be done on construct

It's valid to have a function handler of None, this is for TLVs that are not mapped to a name/value pair(e.g.LLDP_TLV_TTL).

add_dot1_link_aggregation(struct, name, data)

Add name/value pairs for TLV Dot1_LinkAggregationId

This is in base class since it can be used by both dot1 and dot3.

add_nested_value(struct, name, data)

Add a single nested name/value pair to the dict

add_single_value(struct, name, data)

Add a single name/value pair to the nv dict

append_value(name, value)

Add value to a list mapped to name

parse_tlv(tlv_type, data)

Parse TLVs from mapping table

This functions takes the TLV type and the raw data for this TLV and gets a tuple from the parser_map. The construct field in the tuple contains the construct lib definition of the TLV which can be parsed to access individual fields. Once the TLV is parsed, the handler function for each TLV will store the individual fields as name/value pairs in nv_dict.

If the handler function does not exist, then no name/value pairs will be added to nv_dict, but since the TLV was handled, True will be returned.

Param tlv_type - type identifier for TLV

Param data - raw TLV value

Returns True if TLV in parser_map and data is valid, otherwise False.

set_value(name, value)

Set name value pair in dictionary

The value for a name should not be changed if it exists.

```
class ironic_inspector.common.lldp_parsers.LLDPPdot1Parser(node_info, nv=None)
```

Bases: *ironic_inspector.common.lldp_parsers.LLDPParser*

Class to handle parsing of 802.1Q TLVs

add_dot1_port_protocol_vlan(*struct, name, data*)
Handle dot1_PORT_PROTOCOL_VLANID

add_dot1_protocol_identities(*struct, name, data*)
Handle dot1_PROTOCOL_IDENTITY

There can be multiple protocol ids TLVs, store in list

add_dot1_vlans(*struct, name, data*)
Handle dot1_VLAN_NAME

There can be multiple vlan TLVs, add dictionary entry with id/vlan to list.

class ironic_inspector.common.lldp_parsers.LLDPdot3Parser(*node_info, nv=None*)
Bases: *ironic_inspector.common.lldp_parsers.LLDPParser*

Class to handle parsing of 802.3 TLVs

add_dot3_macphy_config(*struct, name, data*)
Handle dot3_MACPHY_CONFIG_STATUS

ironic_inspector.common.lldp_tlv module

Link Layer Discovery Protocol TLVs

ironic_inspector.common.lldp_tlv.bytes_to_int(*obj*)
Convert bytes to an integer

Param obj - array of bytes

ironic_inspector.common.lldp_tlv.get_autoneg_cap(*pmd*)
Get autonegotiated capability strings

This returns a list of capability strings from the Physical Media Dependent (PMD) capability bits.

Parameters pmd PMD bits

Returns Sorted list containing capability strings

ironic_inspector.common.lldp_tlv.mapping_for_enum(*mapping*)
Return tuple used for keys as a dict

Param mapping - dict with tuple as keys

ironic_inspector.common.lldp_tlv.mapping_for_switch(*mapping*)
Return dict from values

Param mapping - dict with tuple as keys

ironic_inspector.common.locking module

```
class ironic_inspector.common.locking.BaseLock
    Bases: object

    abstract acquire(blocking=True)
        Acquire lock.

    abstract is_locked()
        Return lock status

    abstract release()
        Release lock.

class ironic_inspector.common.locking.InternalLock(uuid)
    Bases: ironic_inspector.common.locking.BaseLock

    Locking mechanism based on threading.Semaphore.

    acquire(blocking=True)
        Acquire lock.

    is_locked()
        Return lock status

    release()
        Release lock.

class ironic_inspector.common.locking.ToozLock(lock)
    Bases: ironic_inspector.common.locking.BaseLock

    Wrapper on tooz locks.

    acquire(blocking=True)
        Acquire lock.

    is_locked()
        Return lock status

    release()
        Release lock.

ironic_inspector.common.locking.get_lock(uuid)
```

ironic_inspector.common.rpc module

```
ironic_inspector.common.rpc.get_client(topic=None)
    Get a RPC client instance.

    Parameters topic The topic of the message will be delivered to. This argument is
    ignored if CONF.standalone is True.

ironic_inspector.common.rpc.get_server(endpoints)
    Get a RPC server instance.

ironic_inspector.common.rpc.init()
```

ironic_inspector.common.rpc_service module

```
class ironic_inspector.common.rpc_service.RPCService(host)
    Bases: oslo_service.service.Service
```

start()

Start a service.

stop()

Stop a service.

Parameters `graceful` indicates whether to wait for all threads to finish or terminate them instantly

ironic_inspector.common.service_utils module

```
ironic_inspector.common.service_utils.prepare_service(args=None)
```

ironic_inspector.common.swift module

```
class ironic_inspector.common.swift.SwiftAPI
    Bases: object
```

API for communicating with Swift.

```
create_object(object, data, container=None, headers=None)
    Uploads a given string to Swift.
```

Parameters

- `object` The name of the object in Swift
- `data` string data to put in the object
- `container` The name of the container for the object. Defaults to the value set in the configuration options.
- `headers` the headers for the object to pass to Swift

Returns The Swift UUID of the object

Raises utils.Error, if any operation with Swift fails.

```
get_object(object, container=None)
```

Downloads a given object from Swift.

Parameters

- `object` The name of the object in Swift
- `container` The name of the container for the object. Defaults to the value set in the configuration options.

Returns Swift object

Raises utils.Error, if the Swift operation fails.

```
ironic_inspector.common.swift.get_introspection_data(uuid, suffix=None)
```

Downloads introspection data from Swift.

Parameters

- **uuid** UUID of the Ironic node that the data came from
- **suffix** optional suffix to add to the underlying swift object name

Returns Swift object with the introspection data

`ironic_inspector.common.swift.reset_swift_session()`

Reset the global session variable.

Mostly useful for unit tests.

`ironic_inspector.common.swift.store_introspection_data(data, uuid, suffix=None)`

Uploads introspection data to Swift.

Parameters

- **data** data to store in Swift
- **uuid** UUID of the Ironic node that the data came from
- **suffix** optional suffix to add to the underlying swift object name

Returns name of the Swift object that the data is stored in

Module contents

`ironic_inspector.conductor package`

Submodules

`ironic_inspector.conductor.manager module`

`class ironic_inspector.conductor.manager.ConductorManager`

Bases: `object`

ironic inspector conductor manager

`RPC_API_VERSION = '1.3'`

`del_host()`

Shutdown the ironic inspector conductor service.

`do_abort(**kwargs)`

`do_continue(**kwargs)`

`do_introspection(**kwargs)`

`do_reapply(**kwargs)`

`init_host()`

Initialize Worker host

Init db connection, load and validate processing hooks, runs periodic tasks.

:returns None

`target = <Target version=1.3>`

```
ironic_inspector.conductor.manager.periodic_clean_up()  
ironic_inspector.conductor.manager.periodic_leader_election(conductor)  
ironic_inspector.conductor.manager.sync_with_ironic(conductor)
```

Module contents

ironic_inspector.conf package

Submodules

ironic_inspector.conf.accelerators module

```
ironic_inspector.conf.accelerators.list_opts()  
ironic_inspector.conf.accelerators.register_opts(conf)
```

ironic_inspector.conf.capabilities module

```
ironic_inspector.conf.capabilities.list_opts()  
ironic_inspector.conf.capabilities.register_opts(conf)
```

ironic_inspector.conf.coordination module

```
ironic_inspector.conf.coordination.list_opts()  
ironic_inspector.conf.coordination.register_opts(conf)
```

ironic_inspector.conf.default module

```
ironic_inspector.conf.default.list_opts()  
ironic_inspector.conf.default.register_opts(conf)
```

ironic_inspector.conf.discovery module

```
ironic_inspector.conf.discovery.list_opts()  
ironic_inspector.conf.discovery.register_opts(conf)
```

[ironic_inspector.conf.dnsmasq_pxe_filter module](#)

```
ironic_inspector.conf.dnsmasq_pxe_filter.list_opts()  
ironic_inspector.conf.dnsmasq_pxe_filter.register_opts(conf)
```

[ironic_inspector.conf.extra_hardware module](#)

```
ironic_inspector.conf.extra_hardware.list_opts()  
ironic_inspector.conf.extra_hardware.register_opts(conf)
```

[ironic_inspector.conf.healthcheck module](#)

```
ironic_inspector.conf.healthcheck.list_opts()  
ironic_inspector.conf.healthcheck.register_opts(conf)
```

[ironic_inspector.conf.iptables module](#)

```
ironic_inspector.conf.iptables.list_opts()  
ironic_inspector.conf.iptables.register_opts(conf)
```

[ironic_inspector.conf.ironic module](#)

```
ironic_inspector.conf.ironic.list_opts()  
ironic_inspector.conf.ironic.register_opts(conf)
```

[ironic_inspector.conf.opts module](#)

```
ironic_inspector.conf.opts.list_opts()  
ironic_inspector.conf.opts.parse_args(args, default_config_files=None)  
ironic_inspector.conf.opts.set_config_defaults()  
    Return a list of oslo.config options available in Inspector code.  
ironic_inspector.conf.opts.set_cors_middleware_defaults()  
    Update default configuration options for oslo.middleware.
```

[ironic_inspector.conf.pci_devices module](#)

```
ironic_inspector.conf.pci_devices.list_opts()  
ironic_inspector.conf.pci_devices.register_opts(conf)
```

[ironic_inspector.conf.port_physnet module](#)

```
ironic_inspector.conf.port_physnet.list_opts()  
ironic_inspector.conf.port_physnet.register_opts(conf)
```

[ironic_inspector.conf.processing module](#)

```
ironic_inspector.conf.processing.list_opts()  
ironic_inspector.conf.processing.register_opts(conf)
```

[ironic_inspector.conf.pxe_filter module](#)

```
ironic_inspector.conf.pxe_filter.list_opts()  
ironic_inspector.conf.pxe_filter.register_opts(conf)
```

[ironic_inspector.conf.service_catalog module](#)

```
ironic_inspector.conf.service_catalog.list_opts()  
ironic_inspector.conf.service_catalog.register_opts(conf)
```

[ironic_inspector.conf.swift module](#)

```
ironic_inspector.conf.swift.list_opts()  
ironic_inspector.conf.swift.register_opts(conf)
```

Module contents

[ironic_inspector.plugins package](#)

Submodules

[ironic_inspector.plugins.accel_device module](#)

Gather and distinguish Accelerator PCI devices from inventory.

```
class ironic_inspector.plugins.accel_device.AccelDevicesHook
    Bases: ironic_inspector.plugins.base.ProcessingHook

    Processing hook for distinguishing accelerator devices.

    before_update(introspection_data, node_info, **kwargs)
        Hook to run before Ironic node update.

        This hook is run after node is found and ports are created, just before the node is updated
        with the data.
```

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns

nothing.
[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

ironic_inspector.plugins.base module

Base code for plugins support.

```
class ironic_inspector.plugins.base.ProcessingHook
    Bases: object
```

Abstract base class for introspection data processing hooks.

```
    before_processing(introspection_data, **kwargs)
        Hook to run before any other data processing.
```

This hook is run even before sanity checks.

Parameters

- **introspection_data** raw information sent by the ramdisk, may be modified by the hook.
- **kwargs** used for extensibility without breaking existing hooks

Returns

```
    before_update(introspection_data, node_info, **kwargs)
        Hook to run before Ironic node update.
```

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns

nothing.
[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

dependencies = []

An ordered list of hooks that must be enabled before this one.

The items here should be entry point names, not classes.

class ironic_inspector.plugins.base.RuleActionPlugin
Bases: *ironic_inspector.plugins.base.WithValidation*

Abstract base class for rule action plugins.

FORMATTED_PARAMS = []

List of params will be formatted with python format.

abstract apply(node_info, params, **kwargs)

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises utils.Error on failure

class ironic_inspector.plugins.base.RuleConditionPlugin
Bases: *ironic_inspector.plugins.base.WithValidation*

Abstract base class for rule condition plugins.

ALLOW_NONE = False

Whether this condition accepts None when field is not found.

REQUIRED_PARAMS = {'value'}

Set with names of required parameters.

abstract check(node_info, field, params, **kwargs)

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises ValueError on unacceptable field value

Returns True if check succeeded, otherwise False

class ironic_inspector.plugins.base.WithValidation
Bases: object

OPTIONAL_PARAMS = {}

Set with names of optional parameters.

REQUIRED_PARAMS = {}

Set with names of required parameters.

validate(*params*, ***kwargs*)

Validate params passed during creation.

Default implementation checks for presence of fields from REQUIRED_PARAMS and fails for unexpected fields (not from REQUIRED_PARAMS + OPTIONAL_PARAMS).

Parameters

- **params** params as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises ValueError on validation failure

ironic_inspector.plugins.base.introspection_data_manager()**ironic_inspector.plugins.base.missing_entrypoints_callback(*names*)**

Raise MissingHookError with comma-separated list of missing hooks

ironic_inspector.plugins.base.node_not_found_hook_manager(*args)**ironic_inspector.plugins.base.processing_hooks_manager(*args)**

Create a Stevedore extension manager for processing hooks.

Parameters **args** arguments to pass to the hooks constructor.

ironic_inspector.plugins.base.reset()

Reset cached managers.

ironic_inspector.plugins.base.rule_actions_manager()

Create a Stevedore extension manager for actions in rules.

ironic_inspector.plugins.base.rule_conditions_manager()

Create a Stevedore extension manager for conditions in rules.

ironic_inspector.plugins.base.validate_processing_hooks()

Validate the enabled processing hooks.

Raises MissingHookError on missing or failed to load hooks

Raises RuntimeError on validation failure

Returns the list of hooks passed validation

ironic_inspector.plugins.base_physnet module

class ironic_inspector.plugins.base_physnet.BasePhysnetHook

Bases: *ironic_inspector.plugins.base.ProcessingHook*

Base class for plugins that assign a physical network to ports.

The mechanism for mapping a port to a physical network should be provided by a subclass via the get_physnet() method.

before_update(*introspection_data*, *node_info*, ***kwargs*)

Process introspection data and patch port physical network.

abstract get_physnet(*port*, *iface_name*, *introspection_data*)

Return a physical network to apply to a port.

Subclasses should implement this method to determine how to map a port to a physical network.

Parameters

- **port** The ironic port to patch.
- **iface_name** Name of the interface.
- **introspection_data** Introspection data.

Returns The physical network to set, or None.

ironic_inspector.plugins.capabilities module

Gather capabilities from inventory.

```
class ironic_inspector.plugins.capabilities.CapabilitiesHook
    Bases: ironic_inspector.plugins.base.ProcessingHook
```

Processing hook for detecting capabilities.

```
before_update(introspection_data, node_info, **kwargs)
```

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

ironic_inspector.plugins.discovery module

Enroll node not found hook hook.

```
ironic_inspector.plugins.discovery.enroll_node_not_found_hook(introspection_data,
                                                               **kwargs)
```

ironic_inspector.plugins.example module

Example plugin.

```
class ironic_inspector.plugins.example.ExampleProcessingHook
    Bases: ironic_inspector.plugins.base.ProcessingHook
```

```
before_processing(introspection_data, **kwargs)
```

Hook to run before any other data processing.

This hook is run even before sanity checks.

Parameters

- **introspection_data** raw information sent by the ramdisk, may be modified by the hook.
- **kwargs** used for extensibility without breaking existing hooks

Returns nothing.

before_update(*introspection_data*, *node_info*, *kwargs*)**

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

class ironic_inspector.plugins.example.ExampleRuleAction

Bases: *ironic_inspector.plugins.base.RuleActionPlugin*

apply(*node_info*, *params*, *kwargs*)**

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises utils.Error on failure

ironic_inspector.plugins.example.example_not_found_hook(*introspection_data*, *kwargs*)****ironic_inspector.plugins.extra_hardware module**

Plugin to store extra hardware information in Swift.

Stores the value of the data key returned by the ramdisk as a JSON encoded string in a Swift object. The object is named extra.hardware-<node uuid> and is stored in the inspector container.

class ironic_inspector.plugins.extra_hardware.ExtraHardwareHook

Bases: *ironic_inspector.plugins.base.ProcessingHook*

Processing hook for saving extra hardware information in Swift.

before_update(*introspection_data*, *node_info*, *kwargs*)**

Stores the data key from introspection_data in Swift.

If the data key exists, updates Ironic extra column hardware_swift_object key to the name of the Swift object, and stores the data in the inspector container in Swift.

Otherwise, it does nothing.

[ironic_inspector.plugins.introspection_data module](#)

Backends for storing introspection data.

class `ironic_inspector.plugins.introspection_data.BaseStorageBackend`
Bases: `object`

abstract `get(node_uuid, processed=True, get_json=False)`

Get introspected data from storage backend.

Parameters

- `node_uuid` node UUID.
- `processed` Specify whether the data to be retrieved is processed or not.
- `get_json` Specify whether return the introspection data in json format, string value is returned if False.

Returns the introspection data.

Raises `IntrospectionDataStoreDisabled` if storage backend is disabled.

abstract `save(node_uuid, data, processed=True)`

Save introspected data to storage backend.

Parameters

- `node_uuid` node UUID.
- `data` the introspected data to be saved, in dict format.
- `processed` Specify whether the data to be saved is processed or not.

Raises `IntrospectionDataStoreDisabled` if storage backend is disabled.

class `ironic_inspector.plugins.introspection_data.DatabaseStore`

Bases: `object`

`get(node_uuid, processed=True, get_json=False)`

`save(node_uuid, data, processed=True)`

class `ironic_inspector.plugins.introspection_data.NoStore`

Bases: `ironic_inspector.plugins.introspection_data.BaseStorageBackend`

`get(node_uuid, processed=True, get_json=False)`

Get introspected data from storage backend.

Parameters

- `node_uuid` node UUID.
- `processed` Specify whether the data to be retrieved is processed or not.
- `get_json` Specify whether return the introspection data in json format, string value is returned if False.

Returns the introspection data.

Raises IntrospectionDataStoreDisabled if storage backend is disabled.

save(*node_uuid*, *data*, *processed*=True)

Save introspected data to storage backend.

Parameters

- **node_uuid** node UUID.
- **data** the introspected data to be saved, in dict format.
- **processed** Specify whether the data to be saved is processed or not.

Raises IntrospectionDataStoreDisabled if storage backend is disabled.

class ironic_inspector.plugins.introspection_data.**SwiftStore**

Bases: object

get(*node_uuid*, *processed*=True, *get_json*=False)

save(*node_uuid*, *data*, *processed*=True)

ironic_inspector.plugins.lldp_basic module

LLDP Processing Hook for basic TLVs

class ironic_inspector.plugins.lldp_basic.**LLDPBasicProcessingHook**

Bases: *ironic_inspector.plugins.base.ProcessingHook*

Process mandatory and optional LLDP packet fields

Loop through raw LLDP TLVs and parse those from the basic management, 802.1, and 802.3 TLV sets. Store parsed data back to the ironic-inspector database.

before_update(*introspection_data*, *node_info*, ***kwargs*)

Process LLDP data and update all_interfaces with processed data

ironic_inspector.plugins.local_link_connection module

Generic LLDP Processing Hook

class

ironic_inspector.plugins.local_link_connection.**GenericLocalLinkConnectionHook**

Bases: *ironic_inspector.plugins.base.ProcessingHook*

Process mandatory LLDP packet fields

Non-vendor specific LLDP packet fields processed for each NIC found for a baremetal node, port ID and chassis ID. These fields if found and if valid will be saved into the local link connection info port id and switch id fields on the Ironic port that represents that NIC.

before_update(*introspection_data*, *node_info*, ***kwargs*)

Process LLDP data and patch Ironic port local link connection

ironic_inspector.plugins.pci_devices module

Gather and distinguish PCI devices from inventory.

class `ironic_inspector.plugins.pci_devices.PciDevicesHook`

Bases: `ironic_inspector.plugins.base.ProcessingHook`

Processing hook for counting and distinguishing various PCI devices.

That information can be later used by nova for node scheduling.

`aliases = {}`

`before_update(introspection_data, node_info, **kwargs)`

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- `introspection_data` processed data from the ramdisk.
- `node_info` NodeInfo instance.
- `kwargs` used for extensibility without breaking existing hooks.

Returns nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

ironic_inspector.plugins.physnet_cidr_map module

Port Physical Network Hook

class `ironic_inspector.plugins.physnet_cidr_map.PhysnetCidrMapHook`

Bases: `ironic_inspector.plugins.base_physnet.BasePhysnetHook`

Process port physical network

Set the physical_network field of baremetal ports based on a cidr to physical network mapping in the configuration.

`get_physnet(port, iface_name, introspection_data)`

Return a physical network to apply to a port.

Parameters

- `port` The ironic port to patch.
- `iface_name` Name of the interface.
- `introspection_data` Introspection data.

Returns The physical network to set, or None.

ironic_inspector.plugins.raid_device module

Gather root device hint from recognized block devices.

```
class ironic_inspector.plugins.raid_device.RaidDeviceDetection
    Bases: ironic_inspector.plugins.base.ProcessingHook
```

Processing hook for learning the root device after RAID creation.

The plugin can figure out the root device in 2 runs. First, it saves the discovered block device serials in node.extra. The second run will check the difference between the recently discovered block devices and the previously saved ones. After saving the root device in node.properties, it will delete the temporarily saved block device serials in node.extra.

This way, it helps to figure out the root device hint in cases when otherwise Ironic doesn't have enough information to do so. Such a usecase is DRAC RAID configuration where the BMC doesn't provide any useful information about the created RAID disks. Using this plugin immediately before and after creating the root RAID device will solve the issue of root device hints.

In cases where theres no RAID volume on the node, the standard plugin will fail due to the missing local_gb value. This plugin fakes the missing value, until its corrected during later runs. Note, that for this to work the plugin needs to take precedence over the standard plugin.

before_processing(introspection_data, **kwargs)

Adds fake local_gb value if its missing from introspection_data.

before_update(introspection_data, node_info, **kwargs)

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

ironic_inspector.plugins.rules module

Standard plugins for rules API.

```
class ironic_inspector.plugins.rules.AddTraitAction
    Bases: ironic_inspector.plugins.base.RuleActionPlugin
```

REQUIRED_PARAMS = {'name'}

Set with names of required parameters.

apply(node_info, params, **kwargs)

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object

- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises `utils.Error` on failure

class `ironic_inspector.plugins.rules.ContainsCondition`

Bases: `ironic_inspector.plugins.rules.ReCondition`

check(`node_info, field, params, **kwargs`)

Check if condition holds for a given field.

Parameters

- **node_info** `NodeInfo` object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises `ValueError` on unacceptable field value

Returns True if check succeeded, otherwise False

class `ironic_inspector.plugins.rules.EmptyCondition`

Bases: `ironic_inspector.plugins.base.RuleConditionPlugin`

ALLOW_NONE = True

Whether this condition accepts None when field is not found.

REQUIRED_PARAMS = {}

Set with names of required parameters.

check(`node_info, field, params, **kwargs`)

Check if condition holds for a given field.

Parameters

- **node_info** `NodeInfo` object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises `ValueError` on unacceptable field value

Returns True if check succeeded, otherwise False

class `ironic_inspector.plugins.rules.EqCondition`

Bases: `ironic_inspector.plugins.rules.SimpleCondition`

op(`b, /`)

Same as `a == b`.

class `ironic_inspector.plugins.rules.ExtendAttributeAction`

Bases: `ironic_inspector.plugins.base.RuleActionPlugin`

```
FORMATTED_PARAMS = ['value']
```

List of params will be formatted with python format.

```
OPTIONAL_PARAMS = {'unique'}
```

Set with names of optional parameters.

```
REQUIRED_PARAMS = {'path', 'value'}
```

Set with names of required parameters.

```
apply(node_info, params, **kwargs)
```

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

utils.Error on failure

```
class ironic_inspector.plugins.rules.FailAction
```

Bases: *ironic_inspector.plugins.base.RuleActionPlugin*

```
REQUIRED_PARAMS = {'message'}
```

Set with names of required parameters.

```
apply(node_info, params, **kwargs)
```

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

utils.Error on failure

```
class ironic_inspector.plugins.rules.GeCondition
```

Bases: *ironic_inspector.plugins.rules.SimpleCondition*

```
op(b, /)
```

Same as a >= b.

```
class ironic_inspector.plugins.rules.GtCondition
```

Bases: *ironic_inspector.plugins.rules.SimpleCondition*

```
op(b, /)
```

Same as a > b.

```
class ironic_inspector.plugins.rules.LeCondition
```

Bases: *ironic_inspector.plugins.rules.SimpleCondition*

```
op(b, /)
```

Same as a <= b.

```
class ironic_inspector.plugins.rules.LtCondition
```

Bases: *ironic_inspector.plugins.rules.SimpleCondition*

`op(b, /)`

Same as `a < b`.

`class ironic_inspector.plugins.rules.MatchesCondition`

Bases: `ironic_inspector.plugins.rules.ReCondition`

`check(node_info, field, params, **kwargs)`

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises `ValueError` on unacceptable field value

Returns True if check succeeded, otherwise False

`class ironic_inspector.plugins.rules.NeCondition`

Bases: `ironic_inspector.plugins.rules.SimpleCondition`

`op(b, /)`

Same as `a != b`.

`class ironic_inspector.plugins.rules.NetCondition`

Bases: `ironic_inspector.plugins.base.RuleConditionPlugin`

`check(node_info, field, params, **kwargs)`

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises `ValueError` on unacceptable field value

Returns True if check succeeded, otherwise False

`validate(params, **kwargs)`

Validate params passed during creation.

Default implementation checks for presence of fields from REQUIRED_PARAMS and fails for unexpected fields (not from REQUIRED_PARAMS + OPTIONAL_PARAMS).

Parameters

- **params** params as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises `ValueError` on validation failure

```
class ironic_inspector.plugins.rules.ReCondition
    Bases: ironic\_inspector.plugins.base.RuleConditionPlugin

    validate(params, **kwargs)
        Validate params passed during creation.

        Default implementation checks for presence of fields from REQUIRED_PARAMS and fails
        for unexpected fields (not from REQUIRED_PARAMS + OPTIONAL_PARAMS).

    Parameters
        • params params as a dictionary
        • kwargs used for extensibility without breaking existing plugins

    Raises ValueError on validation failure

class ironic_inspector.plugins.rules.RemoveTraitAction
    Bases: ironic\_inspector.plugins.base.RuleActionPlugin

    REQUIRED_PARAMS = {'name'}
        Set with names of required parameters.

    apply(node_info, params, **kwargs)
        Run action on successful rule match.

    Parameters
        • node_info NodeInfo object
        • params parameters as a dictionary
        • kwargs used for extensibility without breaking existing plugins

    Raises utils.Error on failure

class ironic_inspector.plugins.rules.SetAttributeAction
    Bases: ironic\_inspector.plugins.base.RuleActionPlugin

    FORMATTED_PARAMS = ['value']
        List of params will be formatted with python format.

    OPTIONAL_PARAMS = {'reset_interfaces', 'value'}
        Set with names of optional parameters.

    REQUIRED_PARAMS = {'path'}
        Set with names of required parameters.

    apply(node_info, params, **kwargs)
        Run action on successful rule match.

    Parameters
        • node_info NodeInfo object
        • params parameters as a dictionary
        • kwargs used for extensibility without breaking existing plugins

    Raises utils.Error on failure

    validate(params, **kwargs)
        Validate params passed during creation.
```

Default implementation checks for presence of fields from REQUIRED_PARAMS and fails for unexpected fields (not from REQUIRED_PARAMS + OPTIONAL_PARAMS).

Parameters

- **params** params as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises ValueError on validation failure

```
class ironic_inspector.plugins.rules.SetCapabilityAction
```

Bases: *ironic_inspector.plugins.base.RuleActionPlugin*

FORMATTED_PARAMS = ['value']

List of params will be formatted with python format.

OPTIONAL_PARAMS = {'value'}

Set with names of optional parameters.

REQUIRED_PARAMS = {'name'}

Set with names of required parameters.

```
apply(node_info, params, **kwargs)
```

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises utils.Error on failure

```
class ironic_inspector.plugins.rules.SimpleCondition
```

Bases: *ironic_inspector.plugins.base.RuleConditionPlugin*

```
check(node_info, field, params, **kwargs)
```

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises ValueError on unacceptable field value

Returns True if check succeeded, otherwise False

op = None

```
ironic_inspector.plugins.rules.coerce(value, expected)
```

ironic_inspector.plugins.standard module

Standard set of plugins.

```
class ironic_inspector.plugins.standard.RamdiskErrorHook
    Bases: ironic\_inspector.plugins.base.ProcessingHook
```

Hook to process error send from the ramdisk.

```
before_processing(introspection_data, **kwargs)
```

Hook to run before any other data processing.

This hook is run even before sanity checks.

Parameters

- **introspection_data** raw information sent by the ramdisk, may be modified by the hook.
- **kwargs** used for extensibility without breaking existing hooks

Returns

nothing.

```
class ironic_inspector.plugins.standard.RootDiskSelectionHook
    Bases: ironic\_inspector.plugins.base.ProcessingHook
```

Smarter root disk selection using Ironic root device hints.

This hook must always go before SchedulerHook, otherwise root_disk field might not be updated.

```
before_update(introspection_data, node_info, **kwargs)
```

Process root disk information.

```
class ironic_inspector.plugins.standard.SchedulerHook
    Bases: ironic\_inspector.plugins.base.ProcessingHook
```

Nova scheduler required properties.

```
KEYS = ('cpus', 'cpu_arch', 'memory_mb')
```

```
before_update(introspection_data, node_info, **kwargs)
```

Update node with scheduler properties.

```
class ironic_inspector.plugins.standard.ValidateInterfacesHook
    Bases: ironic\_inspector.plugins.base.ProcessingHook
```

Hook to validate network interfaces.

```
before_processing(introspection_data, **kwargs)
```

Validate information about network interfaces.

```
before_update(introspection_data, node_info, **kwargs)
```

Create new ports and drop ports that are not present in the data.

Module contents

ironic_inspector.pxe_filter package

Submodules

ironic_inspector.pxe_filter.base module

Base code for PXE boot filtering.

`class ironic_inspector.pxe_filter.base.BaseFilter`

Bases: `ironic_inspector.pxe_filter.interface.FilterDriver`

The generic PXE boot filtering interface implementation.

This driver doesn't do anything but provides a basic synchronization and initialization logic for some drivers to reuse. Subclasses have to provide a custom sync() method.

fsm = <automaton.machines.FiniteMachine object>

fsm_reset_on_error()

Reset the filter driver upon generic exception.

The context is self.fsm. The automaton.exceptions.NotFound error is cast to the InvalidFilterDriverState error. Other exceptions trigger self.reset()

Raises InvalidFilterDriverState

Returns nothing.

get_periodic_sync_task()

Get periodic sync task for the filter.

The periodic task returned is casting the InvalidFilterDriverState to the periodics.NeverAgain exception to quit looping.

Raises periodics.NeverAgain

Returns a periodic task to be run in the background.

init_filter()

Base driver initialization logic. Locked.

Raises InvalidFilterDriverState

Returns nothing.

reset()

Reset internal driver state.

This method is called by the fsm_context manager upon exception as well as by the tear_down_filter method. A subclass might wish to override as necessary, though must not lock the driver. The overriding subclass should up-call.

Returns nothing.

property state

Current driver state.

sync(*ironic*)

Base driver sync logic. Locked.

Parameters **ironic** obligatory ironic client instance

Returns nothing.

tear_down_filter()

Base driver tear down logic. Locked.

Returns nothing.

class ironic_inspector.pxe_filter.base.Events

Bases: object

PXE filter driver transitions.

initialize = 'initialize'

reset = 'reset'

sync = 'sync'

exception ironic_inspector.pxe_filter.base.InvalidFilterDriverState

Bases: RuntimeError

The fsm of the filter driver raised an error.

class ironic_inspector.pxe_filter.base.NoopFilter

Bases: *ironic_inspector.pxe_filter.base.BaseFilter*

A trivial PXE boot filter.

get_periodic_sync_task()

Get periodic sync task for the filter.

The periodic task returned is casting the InvalidFilterDriverState to the periodics.NeverAgain exception to quit looping.

Raises periodics.NeverAgain

Returns a periodic task to be run in the background.

class ironic_inspector.pxe_filter.base.States

Bases: object

PXE filter driver states.

initialized = 'initialized'

uninitialized = 'uninitialized'

ironic_inspector.pxe_filter.base.driver()

Get the driver for the PXE filter.

Returns the singleton PXE filter driver object.

ironic_inspector.pxe_filter.base.get_active_macs(*ironic*)

ironic_inspector.pxe_filter.base.get_inactive_macs(*ironic*)

ironic_inspector.pxe_filter.base.get_ironic_macs(*ironic*)

ironic_inspector.pxe_filter.base.locked_driver_event(*event*)

Call driver method having processed the fsm event.

ironic_inspector.pxe_filter.dnsmasq module

class `ironic_inspector.pxe_filter.dnsmasq.DnsmasqFilter`
Bases: `ironic_inspector.pxe_filter.base.BaseFilter`

The dnsmasq PXE filter driver.

A pxe filter driver implementation that controls access to dnsmasq through amending its configuration.

`init_filter()`

Performs an initial sync with ironic and starts dnsmasq.

The initial `_sync()` call reduces the chances dnsmasq might lose some inotify deny list events by prefetching the list before dnsmasq is started.

Raises OSError, IOError.

Returns None.

`reset()`

Stop dnsmasq and upcall reset.

`sync(ironic)`

Sync dnsmasq configuration with current Ironic&Inspector state.

Polls all ironic ports. Those being inspected, the active ones, are added to the allow list while the rest are added to the deny list in the dnsmasq configuration.

Parameters `ironic` an ironic client instance.

Raises OSError, IOError.

Returns None.

ironic_inspector.pxe_filter.interface module

The code of the PXE boot filtering interface.

class `ironic_inspector.pxe_filter.interface.FilterDriver`
Bases: object

The PXE boot filtering interface.

`abstract get_periodic_sync_task()`

Get periodic sync task for the filter.

Returns a periodic task to be run in the background.

`abstract init_filter()`

Initialize the internal driver state.

This method should be idempotent and may perform system-wide filter state changes. Can be synchronous.

Returns nothing.

`abstract sync(ironic)`

Synchronize the filter with ironic and inspector.

To be called both periodically and as needed by inspector. The filter should tear down its internal state if the sync method raises in order to propagate filtering exception between periodic and on-demand sync call. To this end, a driver should raise from the sync call if its internal state isn't properly initialized.

Parameters `ironic` an ironic client instance.

Returns nothing.

abstract `tear_down_filter()`

Reset the filter.

This method should be idempotent and may perform system-wide filter state changes. Can be synchronous.

Returns nothing.

ironic_inspector.pxe_filter.iptables module

class `ironic_inspector.pxe_filter.iptables.IptablesFilter`

Bases: `ironic_inspector.pxe_filter.base.BaseFilter`

A PXE boot filtering interface implementation.

init_filter()

Base driver initialization logic. Locked.

Raises InvalidFilterDriverState

Returns nothing.

reset()

Reset internal driver state.

This method is called by the fsm_context manager upon exception as well as by the `tear_down_filter` method. A subclass might wish to override as necessary, though must not lock the driver. The overriding subclass should up-call.

Returns nothing.

sync(*ironic*)

Sync firewall filter rules for introspection.

Gives access to PXE boot port for any machine, except for those, whose MAC is registered in Ironic and is not on introspection right now.

This function is called from both introspection initialization code and from periodic task. This function is supposed to be resistant to unexpected iptables state.

`init()` function must be called once before any call to this function. This function is using eventlet semaphore to serialize access from different green threads.

Parameters `ironic` an ironic client instance.

Returns nothing.

Module contents

Submodules

ironic_inspector.api_tools module

Generic Rest Api tools.

`ironic_inspector.api_tools.limit_field(value)`

Fetch the pagination limit field from flask.request.args.

Returns the limit

`ironic_inspector.api_tools.marker_field(value)`

Fetch the pagination marker field from flask.request.args.

Returns an uuid

`ironic_inspector.api_tools.raises_coercion_exceptions(fn)`

Convert coercion function exceptions to utils.Error.

Raises utils.Error when the coercion function raises an AssertionError or a ValueError

`ironic_inspector.api_tools.request_field(field_name)`

Decorate a function that coerces the specified field.

Parameters `field_name` name of the field to fetch

Returns a decorator

ironic_inspector.db module

SQLAlchemy models for inspection data and shared database code.

`class ironic_inspector.db.Attribute(**kwargs)`

Bases: sqlalchemy.orm.decl_api.Base

`name`

`node_uuid`

`uuid`

`value`

`class ironic_inspector.db.IntrospectionData(**kwargs)`

Bases: sqlalchemy.orm.decl_api.Base

`data`

`processed`

`uuid`

`class ironic_inspector.db.ModelBase`

Bases: oslo_db.sqlalchemy.models.ModelBase

`class ironic_inspector.db.Node(**kwargs)`

Bases: sqlalchemy.orm.decl_api.Base

```
error
finished_at
manage_boot
started_at
state
uuid
version_id

class ironic_inspector.db.Option(**kwargs)
Bases: sqlalchemy.orm.decl_api.Base

    name
    uuid
    value

class ironic_inspector.db.Rule(**kwargs)
Bases: sqlalchemy.orm.decl_api.Base

    actions
    conditions
    created_at
    description
    disabled
    scope
    uuid

class ironic_inspector.db.RuleAction(**kwargs)
Bases: sqlalchemy.orm.decl_api.Base

    action
    as_dict()
    id
    params
    rule

class ironic_inspector.db.RuleCondition(**kwargs)
Bases: sqlalchemy.orm.decl_api.Base

    as_dict()
    field
    id
    invert
    multiple
    op
```

params

rule

`ironic_inspector.db.ensure_transaction(session=None)`

`ironic_inspector.db.get_context_manager()`

Create transaction context manager lazily.

Returns The transaction context manager.

`ironic_inspector.db.get_reader_session()`

Help method to get reader session.

Returns The reader session.

`ironic_inspector.db.get_writer_session()`

Help method to get writer session.

Returns The writer session.

`ironic_inspector.db.init()`

Initialize the database.

Method called on service start up, initialize transaction context manager and try to create db session.

`ironic_inspector.db.model_query(model, *args, **kwargs)`

Query helper for simpler session usage.

Parameters `session` if present, the session to use

[ironic_inspector.introspect module](#)

Handling introspection request.

`ironic_inspector.introspect.abort(node_id, token=None)`

Abort running introspection.

Parameters

- `node_id` node UUID or name
- `token` authentication token

Raises Error

`ironic_inspector.introspect.introspect(node_id, manage_boot=True, token=None)`

Initiate hardware properties introspection for a given node.

Parameters

- `node_id` node UUID or name
- `manage_boot` whether to manage boot for this node
- `token` authentication token

Raises Error

ironic_inspector.introspection_state module

Introspection state.

```
class ironic_inspector.introspection_state.Events
```

Bases: object

Events that change introspection state.

```
abort = 'abort'
```

```
abort_end = 'abort_end'
```

```
classmethod all()
```

Return a list of all events.

```
error = 'error'
```

```
finish = 'finish'
```

```
process = 'process'
```

```
reapply = 'reapply'
```

```
start = 'start'
```

```
timeout = 'timeout'
```

```
wait = 'wait'
```

```
class ironic_inspector.introspection_state.States
```

Bases: object

States of an introspection.

```
aborting = 'aborting'
```

```
classmethod all()
```

Return a list of all states.

```
enrolling = 'enrolling'
```

```
error = 'error'
```

```
finished = 'finished'
```

```
processing = 'processing'
```

```
reapplying = 'reapplying'
```

```
starting = 'starting'
```

```
waiting = 'waiting'
```

ironic_inspector.main module

```
ironic_inspector.main.add_version_headers(res)
ironic_inspector.main.api(path, is_public_api=False, rule=None, verb_to_rule_map=None,
                           **flask_kwargs)
```

Decorator to wrap api methods.

Performs flask routing, exception conversion, generation of oslo context for request and API access policy enforcement.

Parameters

- **path** flask app route path
- **is_public_api** whether this API path should be treated as public, with minimal access enforcement
- **rule** API access policy rule to enforce. If rule is None, the default policy rule will be enforced, which is deny all if not overridden in policy config file.
- **verb_to_rule_map** if both rule and this are given, defines mapping between http verbs (uppercase) and strings to format the rule string with
- **kwargs** all the rest kwargs are passed to flask app.route

```
ironic_inspector.main.api_continue()
ironic_inspector.main.api_introspection(node_id)
ironic_inspector.main.api_introspection_abort(node_id)
ironic_inspector.main.api_introspection_data(node_id)
ironic_inspector.main.api_introspection_reapply(node_id)
ironic_inspector.main.api_introspection_statuses()
```

```
ironic_inspector.main.api_introspection_unprocessed_data(node_id)
```

```
ironic_inspector.main.api_root()
```

```
ironic_inspector.main.api_rule(uuid)
```

```
ironic_inspector.main.api_rules()
```

```
ironic_inspector.main.check_api_version()
```

```
ironic_inspector.main.convert_exceptions(func)
```

```
ironic_inspector.main.create_link_object(urls)
```

```
ironic_inspector.main.error_response(exc, code=500)
```

```
ironic_inspector.main.generate_introspection_status(node)
```

Return a dict representing current node status.

Parameters **node** a NodeInfo instance

Returns dictionary

```
ironic_inspector.main.generate_resource_data(resources)
```

```
ironic_inspector.main.get_app()
    Get the flask instance.

ironic_inspector.main.get_client_compat()
ironic_inspector.main.get_random_topic()
ironic_inspector.main.handle_404(error)
ironic_inspector.main.rule_repr(rule, short)
ironic_inspector.main.start_coordinator()
    Create a coordinator instance for non-standalone case.

ironic_inspector.main.version_root(version)
```

ironic_inspector.node_cache module

Cache for nodes currently under introspection.

```
class ironic_inspector.node_cache.NodeInfo(uuid, version_id=None, state=None,
                                             started_at=None, finished_at=None,
                                             error=None, node=None, ports=None,
                                             ironic=None, manage_boot=True)
```

Bases: object

Record about a node in the cache.

This class optionally allows to acquire a lock on a node. Note that the class instance itself is NOT thread-safe, you need to create a new instance for every thread.

acquire_lock(blocking=True)

Acquire a lock on the associated node.

Exits with success if a lock is already acquired using this NodeInfo object.

Parameters **blocking** if True, wait for lock to be acquired, otherwise return immediately.

Returns boolean value, whether lock was acquired successfully

add_attribute(name, value, session=None)

Store look up attribute for a node in the database.

Parameters

- **name** attribute name
- **value** attribute value or list of possible values
- **session** optional existing database session

add_trait(trait, ironic=None)

Add a trait to the node.

Parameters

- **trait** trait to add
- **ironic** Ironic client to use instead of self.ironic

property attributes

Node look up attributes as a dict.

commit()

Commit current node status into the database.

create_ports(ports, ironic=None)

Create one or several ports for this node.

Parameters

- **ports** List of ports with all their attributes e.g [{mac: xx, ip: xx, client_id: None}, {mac: xx, ip: None, client_id: None}] It also support the old style of list of macs. A warning is issued if port already exists on a node.
- **ironic** Ironic client to use instead of self.ironic

delete_port(port, ironic=None)

Delete port.

Parameters

- **port** port object or its MAC
- **ironic** Ironic client to use instead of self.ironic

finished(event, error=None)

Record status for this node and process a terminal transition.

Also deletes look up attributes from the cache.

Parameters

- **event** the event to process
- **error** error message

classmethod from_row(row, ironic=None, node=None)

Construct NodeInfo from a database row.

fsm_event(event, strict=False)

Update node_info.state based on a fsm.process_event(event) call.

An AutomatonException triggers an error event. If strict, node_info.finished(istate.Events.error, error=str(exc)) is called with the AutomatonException instance and a EventError raised.

Parameters **event** an event to process by the fsm

Strict whether to fail the introspection upon an invalid event

Raises NodeStateInvalidEvent

get_by_path(path)

Get field value by ironic-style path (e.g. /extra/foo).

Parameters **path** path to a field

Returns field value

Raises KeyError if field was not found

invalidate_cache()

Clear all cached info, so that its reloaded next time.

property ironic

Ironic client instance.

property manage_boot

Whether to manage boot for this node.

node(*ironic=None*)

Get Ironic node object associated with the cached node record.

property options

Node introspection options as a dict.

patch(*patches, ironic=None, **kwargs*)

Apply JSON patches to a node.

Refreshes cached node instance.

Parameters

- **patches** JSON patches to apply
- **ironic** Ironic client to use instead of self.ironic
- **kwargs** Arguments to pass to ironicclient.

Raises openstacksdk exceptions**patch_port(*port, patches, ironic=None*)**

Apply JSON patches to a port.

Parameters

- **port** port object or its MAC
- **patches** JSON patches to apply
- **ironic** Ironic client to use instead of self.ironic

ports(*ironic=None*)

Get Ironic port objects associated with the cached node record.

This value is cached as well, use invalidate_cache() to clean.

Returns dict MAC -> port object**release_lock()**

Release a lock on a node.

Does nothing if lock was not acquired using this NodeInfo object.

remove_trait(*trait, ironic=None*)

Remove a trait from the node.

Parameters

- **trait** trait to add
- **ironic** Ironic client to use instead of self.ironic

replace_field(*path, func, **kwargs*)

Replace a field on ironic node.

Parameters

- **path** path to a field as used by the ironic client

- **func** function accepting an old value and returning a new one
- **kwarg**s if default value is passed here, it will be used when no existing value is found.

Raises KeyError if value is not found and default is not set

Raises everything that patch() may raise

`set_option(name, value)`

Set an option for a node.

property state

State of the node_info object.

`update_capabilities(ironic=None, **caps)`

Update capabilities on a node.

Parameters

- **caps** capabilities to update
- **ironic** Ironic client to use instead of self.ironic

`update_properties(ironic=None, **props)`

Update properties on a node.

Parameters

- **props** properties to update
- **ironic** Ironic client to use instead of self.ironic

property version_id

Get the version id

`ironic_inspector.node_cache.active_macs()`

List all MACs that are on introspection right now.

`ironic_inspector.node_cache.add_node(uuid, state, manage_boot=True, **attributes)`

Store information about a node under introspection.

All existing information about this node is dropped. Empty values are skipped.

Parameters

- **uuid** Ironic node UUID
- **state** The initial state of the node
- **manage_boot** whether to manage boot for this node
- **attributes** attributes known about this node (like macs, BMC etc); also ironic client instance may be passed under ironic

Returns NodeInfo

`ironic_inspector.node_cache.clean_up()`

Clean up the cache.

Finish introspection for timed out nodes.

Returns list of timed out node UUIDs

`ironic_inspector.node_cache.create_node(driver, ironic=None, **attributes)`

Create ironic node and cache it.

- Create new node in ironic.
- Cache it in inspector.
- Sets node_info state to enrolling.

Parameters

- **driver** driver for Ironic node.
- **ironic** ironic client instance.
- **attributes** dict, additional keyword arguments to pass to the ironic client on node creation.

Returns NodeInfo, or None in case error happened.

`ironic_inspector.node_cache.delete_nodes_not_in_list(uuids)`

Delete nodes which dont exist in Ironic node UIDs.

Parameters **uuids** Ironic node UIDs

`ironic_inspector.node_cache.find_node(**attributes)`

Find node in cache.

Looks up a node based on attributes in a best-match fashion. This function acquires a lock on a node.

Parameters **attributes** attributes known about this node (like macs, BMC etc) also
ironic client instance may be passed under ironic

Returns structure NodeInfo with attributes `uuid` and `created_at`

Raises Error if node is not found or multiple nodes match the attributes

`ironic_inspector.node_cache.fsm_event_after(event, strict=False)`

Trigger an fsm event after the function execution.

It is assumed the first function arg of the decorated function is always a NodeInfo instance.

Parameters

- **event** the event to process after the function call
- **strict** make an invalid fsm event trigger an error event

`ironic_inspector.node_cache.fsm_event_before(event, strict=False)`

Trigger an fsm event before the function execution.

It is assumed the first function arg of the decorated function is always a NodeInfo instance.

Parameters

- **event** the event to process before the function call
- **strict** make an invalid fsm event trigger an error event

`ironic_inspector.node_cache.fsm_transition(event, reentrant=True, **exc_kwargs)`

Decorate a function to perform a (non-)reentrant transition.

If True, reentrant transition will be performed at the end of a function call. If False, the transition will be performed before the function call. The function is decorated with the triggers_fsm_error_transition decorator as well.

Parameters

- **event** the event to bind the transition to.
- **reentrant** whether the transition is reentrant.
- **exc_kwargs** passed on to the triggers_fsm_error_transition decorator

`ironic_inspector.node_cache.get_introspection_data(node_id, processed=True)`

Get introspection data for this node.

Parameters

- **node_id** node UUID.
- **processed** Specify the type of introspected data, set to False indicates retrieving the unprocessed data.

Returns A dictionary representation of intropsected data

`ironic_inspector.node_cache.get_node(node_id, ironic=None)`

Get node from cache.

Parameters

- **node_id** node UUID or name.
- **ironic** optional ironic client instance

Returns structure NodeInfo.

`ironic_inspector.node_cache.get_node_list(ironic=None, marker=None, limit=None)`

Get node list from the cache.

The list of the nodes is ordered based on the (started_at, uuid) attribute pair, newer items first.

Parameters

- **ironic** optional ironic client instance
- **marker** pagination marker (an UUID or None)
- **limit** pagination limit; None for default CONF.api_max_limit

Returns a list of NodeInfo instances.

`ironic_inspector.node_cache.introspection_active()`

Check if introspection is active for at least one node.

`ironic_inspector.node_cache.record_node(ironic=None, bmc_addresses=None, macs=None)`

Create a cache record for a known active node.

Parameters

- **ironic** ironic client instance.
- **bmc_addresses** list of BMC addresses.
- **macs** list of MAC addresses.

Returns NodeInfo

ironic_inspector.node_cache.release_lock(func)

Decorate a node_info-function to release the node_info lock.

Assumes the first parameter of the function func is always a NodeInfo instance.

ironic_inspector.node_cache.start_introspection(uuid, **kwargs)

Start the introspection of a node.

If a node_info record exists in the DB, a start transition is used rather than dropping the record in order to check for the start transition validity in particular node state.

Parameters

- **uuid** Ironic node UUID
- **kwargs** passed on to add_node()

Raises NodeStateInvalidEvent in case the start transition is invalid in the current node state

Raises NodeStateRaceCondition if a mismatch was detected between the node_info cache and the DB

Returns NodeInfo

ironic_inspector.node_cache.store_introspection_data(node_id, introspection_data, processed=True)

Store introspection data for this node.

Parameters

- **node_id** node UUID.
- **introspection_data** A dictionary of introspection data
- **processed** Specify the type of introspected data, set to False indicates the data is unprocessed.

ironic_inspector.node_cache.triggers_fsm_error_transition(errors=(<class 'Exception'>,), no_errors=(<class 'ironic_inspector.utils.NodeStateInvalidEvent'>, <class 'ironic_inspector.utils.NodeStateRaceCondition'>,))

Trigger an fsm error transition upon certain errors.

It is assumed the first function arg of the decorated function is always a NodeInfo instance.

Parameters

- **errors** a tuple of exceptions upon which an error event is triggered. Re-raised.
- **no_errors** a tuple of exceptions that wont trigger the error event.

ironic_inspector.policy module

`ironic_inspector.policy.authorize(rule, target, creds, *args, **kwargs)`

A shortcut for policy.Enforcer.authorize()

Checks authorization of a rule against the target and credentials, and raises an exception if the rule is not defined. args and kwargs are passed directly to oslo.policy Enforcer.authorize Always returns True if CONF.auth_strategy != keystone.

Parameters

- **rule** name of a registered oslo.policy rule
- **target** dict-like structure to check rule against
- **creds** dict of policy values from request

Returns True if request is authorized against given policy, False otherwise

Raises oslo_policy.policy.PolicyNotRegistered if supplied policy is not registered in oslo_policy

`ironic_inspector.policy.get_enforcer()`

Provides access to the single instance of Policy enforcer.

`ironic_inspector.policy.get_oslo_policy_enforcer()`

Get the enforcer instance to generate policy files.

This method is for use by oslopolicy CLI scripts. Those scripts need the output-file and namespace options, but having those in sys.argv means loading the inspector config options will fail as those are not expected to be present. So we pass in an arg list with those stripped out.

`ironic_inspector.policy.init_enforcer(policy_file=None, rules=None, default_rule=None, use_conf=True)`

Synchronously initializes the policy enforcer

Parameters

- **policy_file** Custom policy file to use, if none is specified, CONF.oslo_policy.policy_file will be used.
- **rules** Default dictionary / Rules to use. It will be considered just in the first instantiation.
- **default_rule** Default rule to use, CONF.oslo_policy.policy_default_rule will be used if none is specified.
- **use_conf** Whether to load rules from config file.

`ironic_inspector.policy.list_policies()`

Get list of all policies defined in code.

Used to register them all at runtime, and by oslo-config-generator to generate sample policy files.

ironic_inspector.process module

Handling introspection data from the ramdisk.

`ironic_inspector.process.get_introspection_data(uuid, processed=True, get_json=False)`
Get introspection data from the storage backend.

Parameters

- **uuid** node UUID
- **processed** Indicates the type of introspection data to be read, set True to request processed introspection data.
- **get_json** Specify whether return the introspection data in json format, string value is returned if False.

Raises

utils.Error

`ironic_inspector.process.process(introspection_data)`

Process data from the ramdisk.

This function heavily relies on the hooks to do the actual data processing.

`ironic_inspector.process.reapply(node_uuid, data=None)`

Re-apply introspection steps.

Re-apply preprocessing, postprocessing and introspection rules on stored data.

Parameters

- **node_uuid** node UUID
- **data** unprocessed introspection data to be reapplied

Raises

utils.Error

`ironic_inspector.process.store_introspection_data(node_uuid, data, processed=True)`

Store introspection data to the storage backend.

Parameters

- **node_uuid** node UUID
- **data** Introspection data to be saved
- **processed** The type of introspection data, set to True means the introspection data is processed, otherwise unprocessed.

Raises

utils.Error

ironic_inspector.rules module

Support for introspection rules.

`class ironic_inspector.rules.IntrospectionRule(uuid, conditions, actions, description, scope=None)`

Bases: object

High-level class representing an introspection rule.

apply_actions(*node_info*, *data*=None)

Run actions on a node.

Parameters

- **node_info** NodeInfo instance
- **data** introspection data

as_dict(*short*=False)

check_conditions(*node_info*, *data*)

Check if conditions are true for a given node.

Parameters

- **node_info** a NodeInfo object
- **data** introspection data

Returns True if conditions match, otherwise False

check_scope(*node_info*)

Check if nodes scope falls under rule._scope and rule is applicable

Parameters **node_info** a NodeInfo object

Returns True if conditions match, otherwise False

property description

`ironic_inspector.rules.actions_schema()`

`ironic_inspector.rules.apply(node_info, data)`

Apply rules to a node.

`ironic_inspector.rules.conditions_schema()`

`ironic_inspector.rules.create(conditions_json, actions_json, uuid=None, description=None, scope=None)`

Create a new rule in database.

Parameters

- **conditions_json** list of dicts with the following keys: * op - operator * field - JSON path to field to compare Other keys are stored as is.
- **actions_json** list of dicts with the following keys: * action - action type Other keys are stored as is.
- **uuid** rule UUID, will be generated if empty
- **description** human-readable rule description
- **scope** if scope on node and rule matches, rule applies; if its empty, rule applies to all nodes.

Returns new IntrospectionRule object

Raises utils.Error on failure

`ironic_inspector.rules.delete(uuid)`

Delete a rule by its UUID.

```
ironic_inspector.rules.delete_all()
```

Delete all rules.

```
ironic_inspector.rules.get(uuid)
```

Get a rule by its UUID.

```
ironic_inspector.rules.get_all()
```

List all rules.

ironic_inspector.utils module

```
class ironic_inspector.utils.DeferredBasicAuthMiddleware(app, auth_file)
```

Bases: object

Middleware which sets X-Identity-Status header based on authentication

```
exception ironic_inspector.utils.Error(msg, code=400, log_level='error', **kwargs)
```

Bases: Exception

Inspector exception.

```
exception ironic_inspector.utils.IntrospectionDataNotFound(msg, code=404, **kwargs)
```

Bases: *ironic_inspector.utils.NotFoundInCacheError*

Introspection data not found.

```
exception ironic_inspector.utils.IntrospectionDataStoreDisabled(msg, code=400, log_level='error', **kwargs)
```

Bases: *ironic_inspector.utils.Error*

Introspection data store is disabled.

```
exception ironic_inspector.utils.NoAvailableConductor(msg, **kwargs)
```

Bases: *ironic_inspector.utils.Error*

No available conductor in the service group.

```
exception ironic_inspector.utils.NodeStateInvalidEvent(msg, code=400, log_level='error', **kwargs)
```

Bases: *ironic_inspector.utils.Error*

Invalid event attempted.

```
exception ironic_inspector.utils.NodeStateRaceCondition(*args, **kwargs)
```

Bases: *ironic_inspector.utils.Error*

State mismatch between the DB and a node_info.

```
exception ironic_inspector.utils.NotFoundInCacheError(msg, code=404, **kwargs)
```

Bases: *ironic_inspector.utils.Error*

Exception when node was not found in cache during processing.

```
class ironic_inspector.utils.ProcessingLoggerAdapter(logger, extra)
```

Bases: *oslo_log.log.KeywordArgumentAdapter*

`process(msg, kwargs)`

Process the logging message and keyword arguments passed in to a logging call to insert contextual information. You can either manipulate the message itself, the keyword args or both. Return the message and kwargs modified (or not) to suit your needs.

Normally, you'll only need to override this one method in a LoggerAdapter subclass for your specific needs.

`ironic_inspector.utils.add_auth_middleware(app)`

Add authentication middleware to Flask application.

Parameters `app` application.

`ironic_inspector.utils.add_basic_auth_middleware(app)`

Add HTTP Basic authentication middleware to Flask application.

Parameters `app` application.

`ironic_inspector.utils.add_cors_middleware(app)`

Create a CORS wrapper

Attach ironic-inspector-specific defaults that must be included in all CORS responses.

Parameters `app` application

`ironic_inspector.utils.add_healthcheck_middleware(app)`

Add healthcheck middleware

Parameters `app` application

`ironic_inspector.utils.check_auth(request, rule=None, target=None)`

Check authentication on request.

Parameters

- `request` Flask request
- `rule` policy rule to check the request against
- `target` dict-like structure to check rule against

Raises `utils.Error` if access is denied

`ironic_inspector.utils.executor()`

Return the current futures executor.

`ironic_inspector.utils.getProcessingLogger(name)`

`ironic_inspector.utils.get_inventory(data, node_info=None)`

Get and validate the hardware inventory from introspection data.

`ironic_inspector.utils.get_ipmi_address_from_data(introspection_data)`

`ironic_inspector.utils.get_ipmi_v6address_from_data(introspection_data)`

`ironic_inspector.utils.get_pxe_mac(introspection_data)`

`ironic_inspector.utils.get_valid_macs(data)`

Get a list of valid MACs from the introspection data.

`ironic_inspector.utils.iso_timestamp(timestamp=None, tz=<UTC>)`

Return an ISO8601-formatted timestamp (tz: UTC) or None.

Parameters

- **timestamp** such as time.time() or None
- **tz** timezone

Returns an ISO8601-formatted timestamp, or None

ironic_inspector.utils.processing_logger_prefix(data=None, node_info=None)

Calculate prefix for logging.

Tries to use: * node UUID, node._state * node PXE MAC, * node BMC address

Parameters

- **data** introspection data
- **node_info** NodeInfo or ironic node object

Returns logging prefix as a string

ironic_inspector.version module

ironic_inspector.wsgi_service module

class ironic_inspector.wsgi_service.WSGIService
Bases: oslo_service.service.Service

Provides ability to launch API from wsgi app.

reset()

Reset server greenpool size to default.

Returns None

start()

Start serving this service using loaded configuration.

Returns None

stop()

Stop serving this API.

Returns None

wait()

Wait for the service to stop serving this API.

Returns None

Module contents

4.1.8 Ironic Inspector CI

Its important to understand the role of each job in the CI. To facilitate that, we have created the documentation below.

Jobs description

The description of each jobs that runs in the CI when you submit a patch for *openstack/ironic-inspector* is shown in the following table.

Note: All jobs are configured to use a pre-build tinyipa ramdisk, a wholedisk image that is downloaded from a Swift temporary url, *pxe* boot and *ipmi* driver.

Table 1: Table. OpenStack Ironic Inspector CI jobs description

Job name	Description
ironic-inspector-grenade	Deploys Ironic and Ironic Inspector in DevStack and runs upgrade for all enabled services.
ironic-inspector-tempest	Deploys Ironic and Ironic Inspector in DevStack. Runs tempest tests that match the regex <i>InspectorBasicTest</i> and deploys 1 virtual baremetal.
ironic-inspector-tempest-discovery	Deploys Ironic and Ironic Inspector in DevStack. Runs tempest tests that match the regex <i>InspectorDiscoveryTest</i> and deploys 1 virtual baremetal.
ironic-inspector-tempest-python3	Deploys Ironic and Ironic Inspector in DevStack under Python3. Runs tempest tests that match the regex <i>Inspector</i> and deploys 1 virtual baremetal.
openstack-tox-functional-py36	Run tox-based functional tests for Ironic Inspector under Python3.6
bifrost-integration-tinyipa-ubuntu-xenial	Tests the integration between Ironic Inspector and Bifrost.
ironic-inspector-tox-bandit	Runs bandit security tests in a tox environment to find known issues in the Ironic Inspector code.

**CHAPTER
FIVE**

INDICES AND TABLES

- genindex
- modindex
- search

PYTHON MODULE INDEX

i

 ironic_inspector, 151
 ironic_inspector.api_tools, 134
 ironic_inspector.cmd, 103
 ironic_inspector.cmd.all, 102
 ironic_inspector.cmd.conductor, 102
 ironic_inspector.cmd.dbsync, 102
 ironic_inspector.cmd.migration, 103
 ironic_inspector.cmd.status, 103
 ironic_inspector.cmd.wsgi, 103
 ironic_inspector.common, 111
 ironic_inspector.common.context, 103
 ironic_inspector.common.coordination,
 104
 ironic_inspector.common.ironic, 105
 ironic_inspector.common.keystone, 106
 ironic_inspector.common.lldp_parsers,
 106
 ironic_inspector.common.lldp_tlv, 108
 ironic_inspector.common.locking, 109
 ironic_inspector.common.rpc, 109
 ironic_inspector.common.rpc_service,
 110
 ironic_inspector.common.service_utils,
 110
 ironic_inspector.common.swift, 110
 ironic_inspector.conductor, 112
 ironic_inspector.conductor.manager, 111
 ironic_inspector.conf, 114
 ironic_inspector.conf.accelerators, 112
 ironic_inspector.conf.capabilities, 112
 ironic_inspector.conf.coordination, 112
 ironic_inspector.conf.default, 112
 ironic_inspector.conf.discovery, 112
 ironic_inspector.conf.dnsmasq_pxe_filter,
 113
 ironic_inspector.conf.extra_hardware,
 113
 ironic_inspector.conf.healthcheck, 113
 ironic_inspector.conf.iptables, 113
 ironic_inspector.conf.ironic, 113
 ironic_inspector.conf.opts, 113
 ironic_inspector.conf.pci_devices, 114
 ironic_inspector.conf.port_physnet, 114
 ironic_inspector.conf.processing, 114
 ironic_inspector.conf.pxe_filter, 114
 ironic_inspector.conf.service_catalog,
 114
 ironic_inspector.conf.swift, 114
 ironic_inspector.db, 134
 ironic_inspector.introspect, 136
 ironic_inspector.introspection_state,
 137
 ironic_inspector.main, 138
 ironic_inspector.node_cache, 139
 ironic_inspector.plugins, 130
 ironic_inspector.plugins.accel_device,
 114
 ironic_inspector.plugins.base, 115
 ironic_inspector.plugins.base_physnet,
 117
 ironic_inspector.plugins.capabilities,
 118
 ironic_inspector.plugins.discovery, 118
 ironic_inspector.plugins.example, 118
 ironic_inspector.plugins.extra_hardware,
 119
 ironic_inspector.plugins.introspection_data,
 120
 ironic_inspector.plugins.lldp_basic,
 121
 ironic_inspector.plugins.local_link_connection,
 121
 ironic_inspector.plugins.pci_devices,
 122
 ironic_inspector.plugins.physnet_cidr_map,
 122
 ironic_inspector.plugins.raid_device,
 123
 ironic_inspector.plugins.rules, 123
 ironic_inspector.plugins.standard, 129
 ironic_inspector.policy, 146

`ironic_inspector.process`, [147](#)
`ironic_inspector.pxe_filter`, [134](#)
`ironic_inspector.pxe_filter.base`, [130](#)
`ironic_inspector.pxe_filter.dnsmasq`,
 [132](#)
`ironic_inspector.pxe_filter.interface`,
 [132](#)
`ironic_inspector.pxe_filter.iptables`,
 [133](#)
`ironic_inspector.rules`, [147](#)
`ironic_inspector.utils`, [149](#)
`ironic_inspector.version`, [151](#)
`ironic_inspector.wsgi_service`, [151](#)

INDEX

A

abort (*ironic_inspector.introspection_state.Events attribute*), 137
abort() (*in module ironic_inspector.introspect*), 136
abort_end (*ironic_inspector.introspection_state.Events attribute*), 137
aborting (*ironic_inspector.introspection_state.States attribute*), 137
AccelDevicesHook (*class in ironic_inspector.plugins.accel_device*), 114
acquire() (*ironic_inspector.common.locking.BaseLock method*), 109
acquire() (*ironic_inspector.common.locking.InternalLock method*), 109
acquire() (*ironic_inspector.common.locking.ToozLock method*), 109
acquire_lock() (*ironic_inspector.node_cache.NodeInfo method*), 139
action (*ironic_inspector.db.RuleAction attribute*), 135
actions (*ironic_inspector.db.Rule attribute*), 135
actions_schema() (*in module ironic_inspector.rules*), 148
active_macs() (*in module ironic_inspector.node_cache*), 142
add_alembic_command() (*in module ironic_inspector.cmd.dbsync*), 102
add_attribute() (*ironic_inspector.node_cache.NodeInfo method*), 139
add_auth_middleware() (*in module ironic_inspector.utils*), 150
add_auth_options() (*in module ironic_inspector.common.keystone*), 106
add_basic_auth_middleware() (*in module ironic_inspector.utils*), 150
add_capabilities()

(*ironic_inspector.common.lldp_parsers.LLDPBasicMgmt method*), 106
add_command_parsers() (*in module ironic_inspector.cmd.dbsync*), 102
add_cors_middleware() (*in module ironic_inspector.utils*), 150
add_dot1_link_aggregation()
add_dot1_port_protocol_vlan() (*ironic_inspector.common.lldp_parsers.LLDPPdot1Parser method*), 107
add_dot1_protocol_identities() (*ironic_inspector.common.lldp_parsers.LLDPPdot1Parser method*), 108
add_dot1_vlans() (*ironic_inspector.common.lldp_parsers.LLDPPdot1Parser method*), 108
add_dot3_macphy_config() (*ironic_inspector.common.lldp_parsers.LLDPPdot3Parser method*), 108
add_healthcheck_middleware() (*in module ironic_inspector.utils*), 150
add_mgmt_address() (*ironic_inspector.common.lldp_parsers.LLDPBasicMgmt method*), 106
add_nested_value() (*ironic_inspector.common.lldp_parsers.LLDPParser method*), 107
add_node() (*in module ironic_inspector.node_cache*), 142
add_single_value() (*ironic_inspector.common.lldp_parsers.LLDPParser method*), 107
add_trait() (*ironic_inspector.node_cache.NodeInfo method*), 139
add_version_headers() (*in module ironic_inspector.main*), 138
AddTraitAction (*class in ironic_inspector.plugins.rules*), 123
aliases (*ironic_inspector.plugins.pci_devices.PciDevicesHook*

```

        attribute), 122
all() (ironic_inspector.introspection_state.Events
       class method), 137
all() (ironic_inspector.introspection_state.States
       class method), 137
ALLOW_NONE (ironic_inspector.plugins.base.RuleConditionPlugin
            attribute), 116
ALLOW_NONE (ironic_inspector.plugins.rules.EmptyCondition
            attribute), 124
api() (in module ironic_inspector.main), 138
api_continue() (in module
                 ironic_inspector.main), 138
api_introspection() (in module
                      ironic_inspector.main), 138
api_introspection_abort() (in module
                            ironic_inspector.main), 138
api_introspection_data() (in module
                           ironic_inspector.main), 138
api_introspection_reapply() (in module
                             ironic_inspector.main), 138
api_introspection_statuses() (in module
                               ironic_inspector.main), 138
api_introspection_unprocessed_data() (in module
                                       ironic_inspector.main), 138
api_root() (in module ironic_inspector.main), 138
api_rule() (in module ironic_inspector.main), 138
api_rules() (in module ironic_inspector.main), 138
append_value()
             (ironic_common.lldp_parsers.LLDPParser
              method), 107
apply() (in module ironic_inspector.rules), 148
apply() (ironic_inspector.plugins.base.RuleActionPlugin
         method), 116
apply() (ironic_inspector.plugins.example.ExampleRuleAction
         method), 119
apply() (ironic_inspector.plugins.rules.AddTraitAction
         method), 123
apply() (ironic_inspector.plugins.rules.ExtendAttributeAction
         method), 125
apply() (ironic_inspector.plugins.rules.FailAction
         method), 125
apply() (ironic_inspector.plugins.rules.RemoveTraitAction
         method), 127
apply() (ironic_inspector.plugins.rules.SetAttributeAction
         method), 127
apply() (ironic_inspector.plugins.rules.SetCapabilityAction
         method), 128
apply_actions()

                                         (ironic_inspector.rules.IntrospectionRule
                                          method), 147
as_dict() (ironic_inspector.db.RuleAction
           method), 135
as_dict() (ironic_inspector.db.RuleCondition
           method), 135
as_dict() (ironic_inspector.rules.IntrospectionRule
           method), 148
Attribute (class in ironic_inspector.db), 134
attributes (ironic_inspector.node_cache.NodeInfo
            property), 139
authorize() (in module ironic_inspector.policy), 146

```

B

BaseFilter	(class in	ironic_inspector.pxe_filter.base), 130
BaseLock	(class in	ironic_inspector.common.locking), 109
BasePhysnetHook	(class in	ironic_inspector.plugins.base_physnet), 117
BaseStorageBackend	(class in	ironic_inspector.plugins.introspection_data), 120
before_processing()	(ironic_inspector.plugins.base.ProcessingHook method), 115	
before_processing()	(ironic_inspector.plugins.example.ExampleProcessingHook method), 118	
before_processing()	(ironic_inspector.plugins.raid_device.RaidDeviceDetection method), 123	
before_processing()	(ironic_inspector.plugins.standard.RamdiskErrorHook method), 129	
before_processing()	(ironic_inspector.plugins.standard.ValidateInterfacesHook method), 129	
before_update()	(ironic_inspector.plugins.accel_device.AccelDevicesHook method), 115	
before_update()	(ironic_inspector.plugins.base.ProcessingHook method), 117	
before_update()	(ironic_inspector.plugins.base.PhysnetBasePhysnetHook method), 117	
before_update()	(ironic_inspector.plugins.base.PhysnetBasePhysnetHook method), 117	

(*ironic_inspector.plugins.capabilities.CapabilitiesHook*.*check*_{method}), 118
before_update() (*ironic_inspector.plugins.example.ExampleProcessingHook*.*main*), 138
before_update() (*ironic_inspector.plugins.extra_hardware.ExtraHardwareHook*.*method*), 119
before_update() (*ironic_inspector.plugins.lldp_basic.LLDPBasicHook*.*method*), 121
before_update() (*ironic_inspector.plugins.local_link_connection.GeneralLLMNRConnectionHook*.*method*), 121
before_update() (*ironic_inspector.plugins.pci_devices.PciDevicesHook*.*node_cache*), 142
before_update() (*ironic_inspector.plugins.raid_device.RaidDeviceHook*.*node_info*.*method*), 140
before_update() (*ironic_inspector.plugins.standard.RootDiskSelectionHook*.*method*), 129
before_update() (*ironic_inspector.plugins.standard.ScheduleHook*.*method*), 129
before_update() (*ironic_inspector.plugins.standard.ValidateCorrespondingCondition*.*method*), 129
bytes_to_int() (*in module ironic_inspector.common.lldp_tlv*), 108
C
call_with_retries() (*in module ironic_inspector.common.ironic*), 105
capabilities_to_dict() (*in module ironic_inspector.common.ironic*), 105
CapabilitiesHook (*class in ironic_inspector.plugins.capabilities*), 118
check() (*ironic_inspector.plugins.base.RuleConditionPlugin*.*method*), 110
check() (*ironic_inspector.plugins.rules.ContainsCondition*.*method*), 124
check() (*ironic_inspector.plugins.rules.EmptyCondition*.*method*), 124
check() (*ironic_inspector.plugins.rules.MatchesCondition*.*method*), 126
check() (*ironic_inspector.plugins.rules.NetCondition*.*method*), 126
D
data (*ironic_inspector.db.IntrospectionData*.*attribute*), 134

D

- DatabaseStore (class in `ironic_inspector.db`), 136
- `ironic_inspector.plugins.introspection_data` EqCondition (class in `ironic_inspector.plugins.rules`), 124
- 120
- DeferredBasicAuthMiddleware (class in `Error`), 149
- `ironic_inspector.utils`), 149
- error (`ironic_inspector.db.Node` attribute), 134
- del_host() (`ironic_inspector.conductor.manager.ConductorManager`).introspection_state.Events method), 111
- attribute), 137
- delete() (in module `ironic_inspector.rules`), 148
- delete_all() (in module `ironic_inspector.rules`), 148
- error (`ironic_inspector.introspection_state.States` attribute), 137
- delete_nodes_not_in_list() (in module `ironic_inspector.node_cache`), 143
- Events (class in `ironic_inspector.main`), 138
- delete_port() (`ironic_inspector.node_cache.NodeInfo` method), 140
- `ironic_inspector.introspection_state`), 137
- dependencies (`ironic_inspector.plugins.base.Processor`.EventHook class in `ironic_inspector.pxe_filter.base`), attribute), 115
- description (`ironic_inspector.db.Rule` attribute), 135
- at- example_not_found_hook() (in module `ironic_inspector.plugins.example`), 119
- description (`ironic_inspector.rules.IntrospectionRule`.property), 148
- dict_to_capabilities() (in module `ironic_inspector.common.ironic`), 105
- disabled (`ironic_inspector.db.Rule` attribute), 135
- DnsmasqFilter (class in `ironic_inspector.pxe_filter.dnsmasq`), 132
- executor() (in module `ironic_inspector.utils`), 150
- ExtendAttributeAction (class in `ironic_inspector.plugins.example`), 119
- do_abort() (`ironic_inspector.conductor.manager.ConductorManager`).plugins.rules), 124
- method), 111
- do_alembic_command() (in module `ironic_inspector.cmd.dbsync`), 102
- ExtraHardwareHook (class in `ironic_inspector.plugins.extra_hardware`), 119
- do_continue() (`ironic_inspector.conductor.manager.ConductorManager`.method), 111
- F
- do_introspection() (in module `ironic_inspector.conductor.manager.ConductorManager`.plugins.rules), 125
- method), 111
- do_reapply() (`ironic_inspector.conductor.manager.ConductorManager`.method), 111
- 125
- do_revision() (in module `ironic_inspector.cmd.dbsync`), 102
- driver() (in module `ironic_inspector.pxe_filter.base`), 131

E

- EmptyCondition (class in `ironic_inspector.plugins.rules`), 124
- enroll_node_not_found_hook() (in module `ironic_inspector.plugins.discovery`), 118
- enrolling (`ironic_inspector.introspection_state.State`.attribute), 137
- ensure_transaction() (in module `FORMATTED_PARAMS`

(*ironic_inspector.plugins.base.RuleActionPlugin*).`get_active_macs()` (in module *ironic_inspector.pxe_filter.base*), 131
FORMATTED_PARAMS
 (*ironic_inspector.plugins.rules.ExtendAttributeAction*).`get_adapter()` (in module *ironic_inspector.common.keystone*), 106
 (*ironic_inspector.plugins.rules.SetAttributeAction*).`get_all()` (in module *ironic_inspector.rules*), 149
 (*ironic_inspector.plugins.rules.SetAttributeAction*).`get_app()` (in module *ironic_inspector.main*), 138
FORMATTED_PARAMS
 (*ironic_inspector.plugins.rules.SetCapabilityAction*).`get_attroneg_cap()` (in module *ironic_inspector.common.lldp_tlv*s), 108
from_dict() (*ironic_inspector.common.context.RequestContext*).`get_by_path()` (*ironic_inspector.node_cache.NodeInfo* method), 140
from_environ()
 (*ironic_inspector.common.context.RequestContext*).`get_client()` (in module *ironic_inspector.common.ironic*), 105
from_row() (*ironic_inspector.node_cache.NodeInfo*).`get_client()` (in module *ironic_inspector.common.rpc*), 109
fsm (*ironic_inspector.pxe_filter.base.BaseFilter*).`get_client_compat()` (in module *ironic_inspector.main*), 139
fsm_event() (*ironic_inspector.node_cache.NodeInfo*).`get_context_manager()` (in module *ironic_inspector.db*), 136
fsm_event_after() (in module *ironic_inspector.node_cache*), 143
fsm_event_before() (in module *ironic_inspector.node_cache*), 143
fsm_reset_on_error()
 (*ironic_inspector.pxe_filter.base.BaseFilter* method), 130
fsm_transition() (in module *ironic_inspector.node_cache*), 143

G

GeCondition (class in *ironic_inspector.plugins.rules*), 125
generate_introspection_status() (in module *ironic_inspector.main*), 138
generate_resource_data() (in module *ironic_inspector.main*), 138
GenericLocalLinkConnectionHook (class in *ironic_inspector.plugins.local_link_connection*), 121
get() (in module *ironic_inspector.rules*), 149
get() (*ironic_inspector.plugins.introspection_data.BaseStorageBackend*).`get_ipmi_address()` (in module *ironic_inspector.common.ironic*), 105
get() (*ironic_inspector.plugins.introspection_data.Database\$Backend*).`get_ipmi_address_from_data()` (in module *ironic_inspector.utils*), 150
get() (*ironic_inspector.plugins.introspection_data.Database\$Backend*).`get_ipmi_v6address_from_data()` (in module *ironic_inspector.utils*), 150
get() (*ironic_inspector.plugins.introspection_data.NoStore*).`get_ironic_macs()` (in module *ironic_inspector.pxe_filter.base*), 131
get() (*ironic_inspector.plugins.introspection_data.SwiftStore*).`get_lock()` (in module *ironic_inspector.common.locking*), 109

```

get_lock() (ironic_inspector.common.coordination.Coordinator
    method), 104                                         handle_org_specific_tlv()
get_members() (ironic_inspector.common.coordination.Coordinator
    method), 104                                         ironic_inspector.common.lldp_parsers.LLDPBasicMgmt
get_node()          (in      module
    ironic_inspector.common.ironic), 105
get_node()          (in      module
    ironic_inspector.node_cache), 144
get_node_list()     (in      module
    ironic_inspector.node_cache), 144
get_object()        (ironic_inspector.common.swift.SwiftAPI
    method), 109
get_oslo_policy_enforcer() (in      module
    ironic_inspector.policy), 146
get_periodic_sync_task()
    (ironic_inspector.pxe_filter.base.BaseFilter
    method), 130
get_periodic_sync_task()
    (ironic_inspector.pxe_filter.base.NoopFilter
    method), 131
get_periodic_sync_task()
    (ironic_inspector.pxe_filter.interface.FilterDriver
    method), 132
get_physnet()       (ironic_inspector.plugins.base_physnet.BasePhysnet
    method), 117
get_physnet()       (ironic_inspector.plugins.physnet_cidr_map.PhysnetCidrMap
    method), 122
get_pxe_mac()       (in      module
    ironic_inspector.utils), 150
get_random_topic()  (in      module
    ironic_inspector.main), 139
get_reader_session() (in      module
    ironic_inspector.db), 136
get_server()        (in      module
    ironic_inspector.common.rpc), 109
get_session()       (in      module
    ironic_inspector.common.keystone),
    106
get_valid_macs()    (in      module
    ironic_inspector.utils), 150
get_writer_session() (in      module
    ironic_inspector.db), 136
getProcessingLogger() (in      module
    ironic_inspector.utils), 150
group_name (ironic_inspector.common.coordination
    attribute), 104
GtCondition         (class      in
    ironic_inspector.plugins.rules), 125
                                         |
                                         id (ironic_inspector.db.RuleAction attribute), 135
                                         id (ironic_inspector.db.RuleCondition attribute),
                                         135
                                         init() (in module ironic_inspector.common.rpc),
                                         109
                                         init() (in module ironic_inspector.db), 136
                                         init_enforcer() (in      module
                                         ironic_inspector.policy), 146
                                         init_filter() (ironic_inspector.pxe_filter.base.BaseFilter
                                         method), 130
                                         init_filter() (ironic_inspector.pxe_filter.dnsmasq.DnsmasqFilter
                                         method), 132
                                         init_filter() (ironic_inspector.pxe_filter.iptables.IptablesFilter
                                         method), 133
                                         init_host() (ironic_inspector.conductor.manager.ConductorManager
                                         method), 132
                                         init_filter() (ironic_inspector.pxe_filter.interface.FilterDriver
                                         method), 133
                                         init_host() (ironic_inspector.conductor.manager.ConductorManager
                                         method), 132
                                         initialize(ironic_inspector.pxe_filter.base.Events
                                         method), 132
                                         initialize(ironic_inspector.pxe_filter.base.Events
                                         method), 133
                                         initialize_wsgi_app() (in      module
                                         ironic_inspector.cmd.wsgi), 103
                                         initialized(ironic_inspector.pxe_filter.base.States
                                         attribute), 131
                                         InternalLock          (class      in
                                         ironic_inspector.common.locking),
                                         109
                                         introspect()          (in      module
                                         ironic_inspector.introspect), 136
                                         introspection_active() (in      module
                                         ironic_inspector.node_cache), 144
                                         introspection_data_manager() (in      module
                                         ironic_inspector.plugins.base), 117
                                         IntrospectionData      (class      in
                                         ironic_inspector.db), 134
                                         IntrospectionDataNotFound, 149
                                         IntrospectionDataStoreDisabled, 149
                                         IntrospectionRule       (class      in
                                         ironic_inspector.rules), 147
                                         invalidate_cache()      (ironic_inspector.node_cache.NodeInfo
                                         method), 140
                                         InvalidFilterDriverState, 131
                                         invert      (ironic_inspector.db.RuleCondition
                                         attribute), 135

```

H

handle_404() (in module ironic_inspector.main),

```
IptablesFilter          (class      in ironic_inspector.conf
                     ironic_inspector.pxe_filter.iptables),
                     133
ironic  (ironic_inspector.node_cache.NodeInfo
         property), 140
ironic_inspector
         module, 151
ironic_inspector.api_tools
         module, 134
ironic_inspector.cmd
         module, 103
ironic_inspector.cmd.all
         module, 102
ironic_inspector.cmd.conductor
         module, 102
ironic_inspector.cmd.dbsync
         module, 102
ironic_inspector.cmd.migration
         module, 103
ironic_inspector.cmd.status
         module, 103
ironic_inspector.cmd.wsgi
         module, 103
ironic_inspector.common
         module, 111
ironic_inspector.common.context
         module, 103
ironic_inspector.common.coordination
         module, 104
ironic_inspector.common.ironic
         module, 105
ironic_inspector.common.keystone
         module, 106
ironic_inspector.common.lldp_parsers
         module, 106
ironic_inspector.common.lldp_tlv
         module, 108
ironic_inspector.common.locking
         module, 109
ironic_inspector.common.rpc
         module, 109
ironic_inspector.common.rpc_service
         module, 110
ironic_inspector.common.service_utils
         module, 110
ironic_inspector.common.swift
         module, 110
ironic_inspector.conductor
         module, 112
ironic_inspector.conductor.manager
         module, 111
                                         in ironic_inspector.conf.accelerators
                                         module, 112
ironic_inspector.conf.capabilities
         module, 112
ironic_inspector.conf.coordination
         module, 112
ironic_inspector.conf.default
         module, 112
ironic_inspector.conf.discovery
         module, 112
ironic_inspector.conf.dnsmasq_pxe_filter
         module, 113
ironic_inspector.conf.extra_hardware
         module, 113
ironic_inspector.conf.healthcheck
         module, 113
ironic_inspector.conf.iptables
         module, 113
ironic_inspector.conf.ironic
         module, 113
ironic_inspector.conf.opts
         module, 113
ironic_inspector.conf.pci_devices
         module, 114
ironic_inspector.conf.port_physnet
         module, 114
ironic_inspector.conf.processing
         module, 114
ironic_inspector.conf.pxe_filter
         module, 114
ironic_inspector.conf.service_catalog
         module, 114
ironic_inspector.conf.swift
         module, 114
ironic_inspector.db
         module, 134
ironic_inspector.introspect
         module, 136
ironic_inspector.introspection_state
         module, 137
ironic_inspector.main
         module, 138
ironic_inspector.node_cache
         module, 139
ironic_inspector.plugins
         module, 130
ironic_inspector.plugins.accel_device
         module, 114
ironic_inspector.plugins.base
```

```

    module, 115
ironic_inspector.plugins.base_physnet
    module, 117
ironic_inspector.plugins.capabilities
    module, 118
ironic_inspector.plugins.discovery
    module, 118
ironic_inspector.plugins.example
    module, 118
ironic_inspector.plugins.extra_hardware
    module, 119
ironic_inspector.plugins.introspection_data
    module, 120
ironic_inspector.plugins.lldp_basic
    module, 121
ironic_inspector.plugins.local_link_connection
    module, 121
ironic_inspector.plugins.pci_devices
    module, 122
ironic_inspector.plugins.physnet_cidr_map
    module, 122
ironic_inspector.plugins.raid_device
    module, 123
ironic_inspector.plugins.rules
    module, 123
ironic_inspector.plugins.standard
    module, 129
ironic_inspector.policy
    module, 146
ironic_inspector.process
    module, 147
ironic_inspector.pxe_filter
    module, 134
ironic_inspector.pxe_filter.base
    module, 130
ironic_inspector.pxe_filter.dnsmasq
    module, 132
ironic_inspector.pxe_filter.interface
    module, 132
ironic_inspector.pxe_filter.iptables
    module, 133
ironic_inspector.rules
    module, 147
ironic_inspector.utils
    module, 149
ironic_inspector.version
    module, 151
ironic_inspector.wsgi_service
    module, 151
is_locked() (ironic_inspector.common.locking.BaseLock
    method), 109
is_locked() (ironic_inspector.common.locking.InternalLock
    method), 109
is_locked() (ironic_inspector.common.locking.ToozLock
    method), 109
iso_timestamp()      (in      module
    ironic_inspector.utils), 150
J
join_group() (ironic_inspector.common.coordination.Coordinate
    method), 104
K
KEYS (ironic_inspector.plugins.standard.SchedulerHook
    attribute), 129
L
leave_group() (ironic_inspector.common.coordination.Coordinate
    method), 104
LeCondition          (class      in
    ironic_inspector.plugins.rules), 125
limit_field()        (in      module
    ironic_inspector.api_tools), 134
list_opts()          (in      module
    ironic_inspector.conf.accelerators),
    112
list_opts()          (in      module
    ironic_inspector.conf.capabilities),
    112
list_opts()          (in      module
    ironic_inspector.conf.coordination),
    112
list_opts()          (in      module
    ironic_inspector.conf.default), 112
list_opts()          (in      module
    ironic_inspector.conf.discovery), 112
list_opts()          (in      module
    ironic_inspector.conf.dnsmasq_pxe_filter),
    113
list_opts()          (in      module
    ironic_inspector.conf.extra_hardware),
    113
list_opts()          (in      module
    ironic_inspector.conf.healthcheck),
    113
list_opts()          (in      module
    ironic_inspector.conf.iptables), 113
list_opts()          (in      module
    ironic_inspector.conf.ironic), 113
list_opts()          (in      module
    ironic_inspector.conf.opts), 113
list_opts()          (in      module
    ironic_inspector.conf.pci_devices),
    113

```

114
list_opts() (in module `ironic_inspector.conf.port_physnet`), 114
list_opts() (in module `ironic_inspector.conf.processing`), 114
list_opts() (in module `ironic_inspector.conf.pxe_filter`), 114
list_opts() (in module `ironic_inspector.conf.service_catalog`), 114
list_opts() (in module `ironic_inspector.conf.swift`), 114
list_policies() (in module `ironic_inspector.policy`), 146
LLDPBasicMgmtParser (class in `ironic_inspector.common.lldp_parsers`), 106
LLDPBasicProcessingHook (class in `ironic_inspector.plugins.lldp_basic`), 121
LLDPdot1Parser (class in `ironic_inspector.common.lldp_parsers`), 107
LLDPdot3Parser (class in `ironic_inspector.common.lldp_parsers`), 108
LLDPParser (class in `ironic_inspector.common.lldp_parsers`), 106
lock_prefix (`ironic_inspector.common.coordination`.*attribute*), 104
locked_driver_event() (in module `ironic_inspector.pxe_filter.base`), 131
lookup_node() (in module `ironic_inspector.common.ironic`), 105
lookup_node_by_bmc_addresses() (in module `ironic_inspector.common.ironic`), 106
lookup_node_by_macs() (in module `ironic_inspector.common.ironic`), 106
LtCondition (class in `ironic_inspector.plugins.rules`), 125

M

main() (in module `ironic_inspector.cmd.all`), 102
main() (in module `ironic_inspector.cmd.conductor`), 102
main() (in module `ironic_inspector.cmd.dbsync`), 102
main() (in module `ironic_inspector.cmd.migration`), 103
main() (in module `ironic_inspector.cmd.status`), 103
main() (in module `ironic_inspector.cmd.tribute`), 135
manage_boot (`ironic_inspector.db.Node` attribute), 135
manage_boot (`ironic_inspector.node_cache.NodeInfo` property), 141
mapping_for_enum() (in module `ironic_inspector.common.lldp_tlvs`), 108
mapping_for_switch() (in module `ironic_inspector.common.lldp_tlvs`), 108
marker_field() (in module `ironic_inspector.api_tools`), 134
MatchesCondition (class in `ironic_inspector.plugins.rules`), 126
MigrationTool (class in `ironic_inspector.cmd.migration`), 103
missing_entrypoints_callback() (in module `ironic_inspector.plugins.base`), 117
model_query() (in module `ironic_inspector.db`), 136
ModelBase (class in `ironic_inspector.db`), 134
module
 ironic_inspector, 151
 ironic_inspector.api_tools, 134
 ironic_inspector.cmd, 103
 ironic_inspector.cmd.all, 102
 ironic_inspector.cmd.conductor, 102
 ironic_inspector.cmd.dbsync, 102
 ironic_inspector.cmd.migration, 103
 ironic_inspector.cmd.status, 103
 ironic_inspector.cmd.wsgi, 103
 ironic_inspector.common, 111
 ironic_inspector.common.context, 103
 ironic_inspector.common.coordination, 104
 ironic_inspector.common.ironic, 105
 ironic_inspector.common.keystone, 106
 ironic_inspector.common.lldp_parsers, 106
 ironic_inspector.common.lldp_tlvs, 108
 ironic_inspector.common.locking, 109
 ironic_inspector.common.rpc, 109
 ironic_inspector.common.rpc_service, 110
 ironic_inspector.common.service_utils,

110
 ironic_inspector.common.swift, 110
 ironic_inspector.conductor, 112
 ironic_inspector.conductor.manager,
 111
 ironic_inspector.conf, 114
 ironic_inspector.conf.accelerators,
 112
 ironic_inspector.conf.capabilities,
 112
 ironic_inspector.conf.coordination,
 112
 ironic_inspector.conf.default, 112
 ironic_inspector.conf.discovery, 112
 ironic_inspector.conf.dnsmasq_pxe_filter,
 113
 ironic_inspector.conf.extra_hardware,
 113
 ironic_inspector.conf.healthcheck,
 113
 ironic_inspector.conf.iptables, 113
 ironic_inspector.conf.ironic, 113
 ironic_inspector.conf.opts, 113
 ironic_inspector.conf.pci_devices,
 114
 ironic_inspector.conf.port_physnet,
 114
 ironic_inspector.conf.processing,
 114
 ironic_inspector.conf.pxe_filter,
 114
 ironic_inspector.conf.service_catalog,
 114
 ironic_inspector.conf.swift, 114
 ironic_inspector.db, 134
 ironic_inspector.introspect, 136
 ironic_inspector.introspection_state,
 137
 ironic_inspector.main, 138
 ironic_inspector.node_cache, 139
 ironic_inspector.plugins, 130
 ironic_inspector.plugins.accel_device,
 114
 ironic_inspector.plugins.base, 115
 ironic_inspector.plugins.base_physnet,
 117
 ironic_inspector.plugins.capabilities,
 118
 ironic_inspector.plugins.discovery,
 118
 ironic_inspector.plugins.example,

118
 ironic_inspector.plugins.extra_hardware,
 119
 ironic_inspector.plugins.introspection_data,
 120
 ironic_inspector.plugins.lldp_basic,
 121
 ironic_inspector.plugins.local_link_connection,
 121
 ironic_inspector.plugins.pci_devices,
 122
 ironic_inspector.plugins.physnet_cidr_map,
 122
 ironic_inspector.plugins.raid_device,
 123
 ironic_inspector.plugins.rules, 123
 ironic_inspector.plugins.standard,
 129
 ironic_inspector.policy, 146
 ironic_inspector.process, 147
 ironic_inspector.pxe_filter, 134
 ironic_inspector.pxe_filter.base,
 130
 ironic_inspector.pxe_filter.dnsmasq,
 132
 ironic_inspector.pxe_filter.interface,
 132
 ironic_inspector.pxe_filter.iptables,
 133
 ironic_inspector.rules, 147
 ironic_inspector.utils, 149
 ironic_inspector.version, 151
 ironic_inspector.wsgi_service, 151
 multiple (ironic_inspector.db.RuleCondition attribute), 135

N

name (ironic_inspector.db.Attribute attribute), 134
 name (ironic_inspector.db.Option attribute), 135
 NeCondition (class in
 ironic_inspector.plugins.rules), 126
 NetCondition (class in
 ironic_inspector.plugins.rules), 126
 NoAvailableConductor, 149
 Node (class in *ironic_inspector.db*), 134
 node() (*ironic_inspector.node_cache.NodeInfo*
 method), 141
 node_not_found_hook_manager() (in module
 ironic_inspector.plugins.base), 117
 node_uuid (*ironic_inspector.db.Attribute* attribute), 134

N

- NodeInfo (*class in ironic_inspector.node_cache*), [parse_tlv\(\)](#) (*ironic_inspector.common.lldp_parsers.LLDPParser* method), [107](#)
- NodeStateInvalidEvent, [149](#)
- NodeStateRaceCondition, [149](#)
- NoopFilter (*class in ironic_inspector.pxe_filter.base*), [131](#)
- NoStore (*class in ironic_inspector.plugins.introspection_data*), [120](#)
- NotFound, [105](#)
- NotFoundInCacheError, [149](#)

O

- op (*ironic_inspector.db.RuleCondition attribute*), [135](#)
- op (*ironic_inspector.plugins.rules.SimpleCondition attribute*), [128](#)
- op() (*ironic_inspector.plugins.rules.EqCondition method*), [124](#)
- op() (*ironic_inspector.plugins.rules.GeCondition method*), [125](#)
- op() (*ironic_inspector.plugins.rules.GtCondition method*), [125](#)
- op() (*ironic_inspector.plugins.rules.LeCondition method*), [125](#)
- op() (*ironic_inspector.plugins.rules.LtCondition method*), [125](#)
- op() (*ironic_inspector.plugins.rules.NeCondition method*), [126](#)
- Option (*class in ironic_inspector.db*), [135](#)
- OPTIONAL_PARAMS (*ironic_inspector.plugins.base.WithValidation attribute*), [116](#)
- OPTIONAL_PARAMS (*ironic_inspector.plugins.rules.ExtendAttributeAction attribute*), [125](#)
- OPTIONAL_PARAMS (*ironic_inspector.plugins.rules.SetAttributeAction attribute*), [127](#)
- OPTIONAL_PARAMS (*ironic_inspector.plugins.rules.SetCapabilityAction attribute*), [128](#)
- options (*ironic_inspector.node_cache.NodeInfo property*), [141](#)

P

- params (*ironic_inspector.db.RuleAction attribute*), [135](#)
- params (*ironic_inspector.db.RuleCondition attribute*), [136](#)
- parse_args() (*in module ironic_inspector.conf.opts*), [113](#)

R

- RaidDeviceDetection (*class in ironic_inspector.plugins.raid_device*), [123](#)
- raises_coercion_exceptions() (*in module ironic_inspector.api_tools*), [134](#)
- RamdiskErrorHook (*class in ironic_inspector.plugins.standard*), [129](#)

```

reapply(ironic_inspector.introspection_state.Events attribute), 137           114
reapply() (in module ironic_inspector.process), 147
reapplying(ironic_inspector.introspection_state.States attribute), 137
ReCondition (class in ironic_inspector.plugins.rules), 126
record_node() (in module ironic_inspector.node_cache), 144
register_auth_opts() (in module ironic_inspector.common.keystone), 106
register_opts() (in module ironic_inspector.conf.accelerators), 112
register_opts() (in module ironic_inspector.conf.capabilities), 112
register_opts() (in module ironic_inspector.conf.coordination), 112
register_opts() (in module ironic_inspector.conf.default), 112
register_opts() (in module ironic_inspector.conf.discovery), 112
register_opts() (in module ironic_inspector.conf.dnsmasq_pxe_filter), REQUIRED_PARAMS
register_opts() (in module ironic_inspector.conf.extra_hardware), 113
register_opts() (in module ironic_inspector.conf.healthcheck), 113
register_opts() (in module ironic_inspector.conf.iptables), 113
register_opts() (in module ironic_inspector.conf.ironic), 113
register_opts() (in module ironic_inspector.conf.pci_devices), 114
register_opts() (in module ironic_inspector.conf.port_physnet), 114
register_opts() (in module ironic_inspector.conf.processing), 114
register_opts() (in module ironic_inspector.conf.pxe_filter), 114
register_opts() (in module ironic_inspector.conf.service_catalog),
register_opts() (in module ironic_inspector.conf.swift), 114
release() (ironic_inspector.common.locking.BaseLock method), 109
release() (ironic_inspector.common.locking.InternalLock method), 109
release() (ironic_inspector.common.locking.ToozLock method), 109
release_lock() (in module ironic_inspector.node_cache), 144
release_lock() (ironic_inspector.node_cache.NodeInfo method), 141
remove_trait()
RemoveTraitAction (class in ironic_inspector.plugins.rules), 127
replace_field() (ironic_inspector.node_cache.NodeInfo method), 141
request_field() (in module ironic_inspector.api_tools), 134
RequestContext (class in ironic_inspector.common.context), 103
REQUIRED_PARAMS (ironic_inspector.plugins.base.RuleConditionPlugin attribute), 116
REQUIRED_PARAMS (ironic_inspector.plugins.base.WithValidation attribute), 116
REQUIRED_PARAMS (ironic_inspector.plugins.rules.AddTraitAction attribute), 123
REQUIRED_PARAMS (ironic_inspector.plugins.rules.EmptyCondition attribute), 124
REQUIRED_PARAMS (ironic_inspector.plugins.rules.ExtendAttributeAction attribute), 125
REQUIRED_PARAMS (ironic_inspector.plugins.rules.FailAction attribute), 125
REQUIRED_PARAMS (ironic_inspector.plugins.rules.RemoveTraitAction attribute), 127
REQUIRED_PARAMS (ironic_inspector.plugins.rules.SetAttributeAction attribute), 127

```

REQUIRED_PARAMS

`(ironic_inspector.plugins.rules.SetCapabilityAction attribute), 128`

`reset (ironic_inspector.pxe_filter.base.Events attribute), 131`

`reset() (in module ironic_inspector.plugins.base), 117`

`reset() (ironic_inspector.pxe_filter.base.BaseFilter method), 130`

`reset() (ironic_inspector.pxe_filter.dnsmasq.DnsmasqFilter method), 132`

`reset() (ironic_inspector.pxe_filter.iptables.IptablesFilter method), 133`

`reset() (ironic_inspector.wsgi_service.WSGIService method), 151`

`reset_ironic_session() (in module ironic_inspector.common.ironic), 106`

`reset_swift_session() (in module ironic_inspector.common.swift), 111`

`RootDiskSelectionHook (class in ironic_inspector.plugins.standard), 129`

`RPC_API_VERSION`

`(ironic_inspector.conductor.manager.ConductorManager attribute), 111`

`RPCService (class in ironic_inspector.common.rpc_service), 110`

`Rule (class in ironic_inspector.db), 135`

`rule (ironic_inspector.db.RuleAction attribute), 135`

`rule (ironic_inspector.db.RuleCondition attribute), 136`

`rule_actions_manager() (in module ironic_inspector.plugins.base), 117`

`rule_conditions_manager() (in module ironic_inspector.plugins.base), 117`

`rule_repr() (in module ironic_inspector.main), 139`

`RuleAction (class in ironic_inspector.db), 135`

`RuleActionPlugin (class in ironic_inspector.plugins.base), 116`

`RuleCondition (class in ironic_inspector.db), 135`

`RuleConditionPlugin (class in ironic_inspector.plugins.base), 116`

`run_elect_coordinator() (ironic_inspector.common.coordination.Coordinator method), 104`

`save() (ironic_inspector.plugins.introspection_data.BaseStorageB method), 120`

`save() (ironic_inspector.plugins.introspection_data.DatabaseStor method), 120`

`save() (ironic_inspector.plugins.introspection_data.NoStore method), 121`

`save() (ironic_inspector.plugins.introspection_data.SwiftStore method), 121`

`SchedulerHook (class in ironic_inspector.plugins.standard), 129`

`scope (ironic_inspector.db.Rule attribute), 135`

`set_config_defaults() (in module ironic_inspector.conf.opts), 113`

`set_cors_middleware_defaults() (in module ironic_inspector.conf.opts), 113`

`set_option() (ironic_inspector.node_cache.NodeInfo method), 142`

`set_value() (ironic_inspector.common.lldp_parsers.LLDPParser method), 107`

`SetAttributeAction (class in ironic_inspector.plugins.rules), 127`

`SetCapabilityAction (class in ironic_inspector.plugins.rules), 128`

`SimpleCondition (class in ironic_inspector.plugins.rules), 128`

`start (ironic_inspector.introspection_state.Events attribute), 137`

`start() (ironic_inspector.common.coordination.Coordinator method), 104`

`start() (ironic_inspector.common.rpc_service.RPCService method), 110`

`start() (ironic_inspector.wsgi_service.WSGIService method), 151`

`start_coordinator() (in module ironic_inspector.main), 139`

`start_introspection() (in module ironic_inspector.node_cache), 145`

`started_at (ironic_inspector.db.Node attribute), 135`

`starting (ironic_inspector.introspection_state.States attribute), 137`

`state (ironic_inspector.db.Node attribute), 135`

`state (ironic_inspector.node_cache.NodeInfo property), 142`

`state (ironic_inspector.pxe_filter.base.BaseFilter property), 130`

`States (class in ironic_inspector.introspection_state), 137`

S

S States (*class in ironic_inspector.pxe_filter.base*), [145](#)
 131

U stop() (*ironic_inspector.common.coordination.Coordinator method*), [104](#)
 uninitialized (*ironic_inspector.pxe_filter.base.States attribute*), [131](#)

stop() (*ironic_inspector.common.rpc_service.RPCService method*), [110](#)
 update_capabilities()

stop() (*ironic_inspector.wsgi_service.WSGIService method*), [151](#)
 (ironic_inspector.node_cache.NodeInfo method), [142](#)

store_introspection_data() (*in module ironic_inspector.common.swift*), [111](#)
 update_properties()

store_introspection_data() (*in module ironic_inspector.node_cache*), [145](#)
 (ironic_inspector.node_cache.NodeInfo method), [142](#)

store_introspection_data() (*in module ironic_inspector.process*), [147](#)
 uuid (*ironic_inspector.db.Attribute attribute*), [134](#)

SwiftAPI (*class in ironic_inspector.common.swift*), [110](#)
 uuid (*ironic_inspector.db.Option attribute*), [135](#)

SwiftStore (*class in ironic_inspector.plugins.introspection_data*), [121](#)
 V uuid (*ironic_inspector.db.Rule attribute*), [135](#)

sync (*ironic_inspector.pxe_filter.base.Events attribute*), [131](#)
 validate() (*ironic_inspector.plugins.base.WithValidation method*), [116](#)

sync() (*ironic_inspector.pxe_filter.base.BaseFilter method*), [130](#)
 validate() (*ironic_inspector.plugins.rules.NetCondition method*), [126](#)

sync() (*ironic_inspector.pxe_filter.dnsmasq.Dnsmasq method*), [132](#)
 validate() (*ironic_inspector.plugins.rules.ReCondition method*), [127](#)

sync() (*ironic_inspector.pxe_filter.interface.FilterDriver method*), [132](#)
 validate() (*ironic_inspector.plugins.rules.SetAttributeAction method*), [127](#)

sync() (*ironic_inspector.pxe_filter.iptables.IptablesFilter method*), [133](#)
 validate_processing_hooks() (*in module ironic_inspector.plugins.base*), [117](#)

sync_with_ironic() (*in module ironic_inspector.conductor.manager*), [112](#)
 ValidateInterfacesHook (*class in ironic_inspector.plugins.standard*), [129](#)

T value (*ironic_inspector.db.Attribute attribute*), [134](#)

target (*ironic_inspector.conductor.manager.Conductor attribute*), [111](#)
 value (*ironic_inspector.db.Option attribute*), [135](#)

tear_down_filter() (*ironic_inspector.pxe_filter.base.BaseFilter method*), [131](#)
 version_id (*ironic_inspector.node_cache.NodeInfo property*), [142](#)

tear_down_filter() (*ironic_inspector.pxe_filter.interface.FilterDriver method*), [133](#)
 version_root() (*in module ironic_inspector.main*), [139](#)

timeout (*ironic_inspector.introspection_state.Events attribute*), [137](#)
 W wait (*ironic_inspector.introspection_state.Events attribute*), [137](#)

to_policy_values() (*ironic_inspector.common.context.RequestContext method*), [103](#)
 wait() (*ironic_inspector.wsgi_service.WSGIService method*), [151](#)

ToozLock (*class in ironic_inspector.common.locking*), [109](#)
 waiting (*ironic_inspector.introspection_state.States attribute*), [137](#)

triggers_fsm_error_transition() (*in module ironic_inspector.cmd.dbsync*), [102](#)
 with_revision() (*in module ironic_inspector.cmd.dbsync*), [102](#)

`WithValidation` (*class* *in*
 ironic_inspector.plugins.base), 116
`WSGIService` (*class* *in*
 ironic_inspector.wsgi_service), 151